



## SWIMM

### 24 HOUR RUNNING

SWIMM are quiet running swimming pool and circulating pumps for the pumping of chlorinated water and dirty water containing small, non-abrasive, solids in suspension. The design features translucent inspection covers and removable filter baskets for trapping debris. Supplied with swivel unions to enable the pump to be removed for maintenance without disturbing the pipe system. The pipe connections are designed to be fitted to rigid plastic pipe with an outside diameter of 48.3mm or 60.3mm. In addition, they also have female BSP connections to enable a male BSP hose tail to be fitted and a flexible hose attached.

**Operating Conditions:** Continuous duty | Max. ambient temperature: 40°C | Max. suction lift: 7 mtrs

**Fluid:** Clean water | Water with floating debris | Temperature: 0 - 35°C



**Application:** Domestic | Commercial | Private pools | Public pools | Water features | Ponds



SWIMM	Type	Impeller	Body
	Circulator	Closed	Nylon

Pump	Impeller	Pump cover	Inlet/outlet unions
	Technoplastic	Thermoplastic PPS	Nylon
	Mechanical Seal	Prefilter	
Silicon-silicon/NBR	Nylon/ABS/SS		

Motor	Poles	Enclosure	Insulation
	2 pole	IPX5	Class F

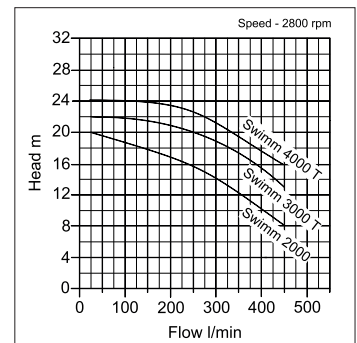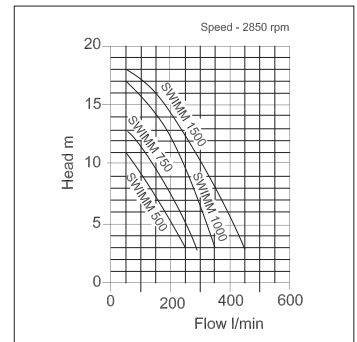

**SWIMM 500**

item code	model	inlet & outlet Ø (mm)	inlet & outlet (BSPF)	kW	volt	flow (l/min)	head (mtrs)	w x l x h (mm)	dry weight (kgs)
19-15-1063	Swimm 500	48.3	1½"	0.37	230	250	11	160x465x234	8.7
19-15-1140	Swimm 750	48.3	1½"	0.55	230	275	13	220x502x270	10.9
19-15-1283	Swimm 1000	48.3	1½"	0.75	230	350	17	220x502x270	12.2
19-15-1211	Swimm 1500	60.3	1½" & 2"	1.10	230	450	18	238x520x331	12.9
19-15-1299	Swimm 2000	60.3	1½" & 2"	1.5	230	450	20	270x600x330	16.2
19-15-1302	Swimm 3000T	60.3	1½" & 2"	2.2	400	450	22	270x600x330	17.5
19-15-1304	Swimm 4000T	60.3	1½" & 2"	2.4	400	450	24	270x645x330	18.5

PREMIUM EFFICIENCY MOTORS (IE3) AVAILABLE FROM 2.2kW 400v MODELS (P.O.A.)