




MVH-10A

HIGH PRESSURE

The **MVH-10A** is a multi-stage pump with a level control float switch for high pressure pumping. It has an integral starting capacitor. It is lubricated and cooled by non-toxic oil. It is not recommended for operation against the closed valve of a tap or a nozzle, nor suitable for ponds or water features.

Fluid: Clean water | Maximum depth of submersion: 8 mtr | Temperature: 0 - 40°C

Application: Water butts | Industry | Irrigation | Potable water | Spraying | Rainwater harvesting

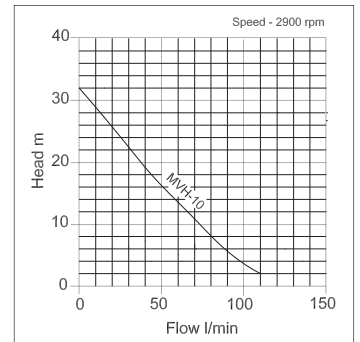

MVH-10A	Impellers	Shaft seal	Level switch (automatic)
	Closed	Double mechanical	Pendant

Pump	Top cover & handle	Pump casing & outlet	Bearing housing	Impellers
	Nylon & glass fibre	Nylon & glass fibre	Nylon & glass fibre	Nylon & glass fibre
	Diffusers	Shaft	Shaft seal	Strainer
	Nylon & glass fibre	S/S 410	Silicon carbide/CE & NBR	S/S 304
	Bottom plate	Level switch		
	Nylon & glass fibre	Polypropylene		

Motor	Poles, protection	Enclosure	Insulation	Thermal protection
	2 pole, IP68	Non toxic oil	Class B	Integral
	Starting	Motor cover	Power cable (10mtr) & switch cable	
	Internal capacitor	S/S 304	Rubber	



MVH-10A

item code	model	Manual or Auto	outlet (FBSP)	kW	volt	flow (l/min)	head (mtrs)	w x l x h (mm)	well size (mm)	dry weight (kgs)
15-10-1038	MVH-10A	A	1"	0.55	230	110	32	162x171x461	435+	9.3