




KTVE (AUTOMATIC) 3 PHASE LEVEL CONTROL

The **KTVE** pumps offer an automatic option to the **KTV** series, without the need for external control panels and cumbersome float switches. A sensor probe is mounted in a durable, moulded rubber bracket and, for added protection, it is positioned within the footprint of the pump base. Once the water level reaches the probe, the pump will start and continue to operate for one minute after the water falls below it. However, if the water level touches the probe within this time, the “stop” signal is cancelled and the pump continues to run until the water is cleared. To enable a lower “on level” (by a further 90mm), the sensor probe can be lengthened by fitting the electrode extender, which is an optional extra.

Special use option: IDS (individually screened cable) on 3.7kW and 5.5kW models. (Please request a quotation)

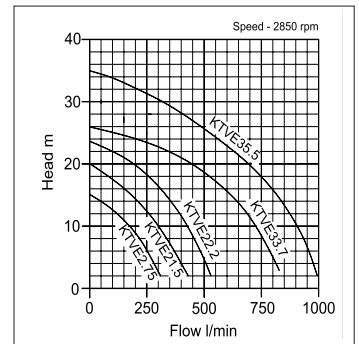

KTVE22.2



KTVE33.7

item code	model	Manual or Auto	outlet (BSPM/mm)	kW	volt	flow (l/min)	head (mtrs)	free passage (mm)	dia x h (mm)	on level (mm)	off level (mm)	dry weight (kgs)
10-10-1069	KTVE2.75	A	2" & 50	0.75	400	320	15	6	Ø200x417	204	65	12.7
10-10-1204	KTVE21.5	A	2" & 50	1.5	400	425	20	8.5	Ø240x486	235	80	22.0
10-10-1037	KTVE22.2	A	2" & 50	2.2	400	525	24	8.5	Ø240x486	235	80	25.0
10-10-1098	KTVE33.7	A	3" & 75	3.7	400	830	26	8.5	Ø285x585	297	90	40.0
10-10-1185	KTVE35.5	A	3" & 75	5.5	400	980	35	8.5	Ø300x620	327	90	52.0
090-126-15	Electrode extender											0.2