




# BABY BATTERY

LARGE FLOW

The **Baby Battery** pumps are low voltage, D.C., plastic submersibles for battery operation only. They are water pumps for use mainly in boat bilges; however, they can be used for general drainage and transfer. They have a duty cycle of approximately 20 minutes and the power cable is supplied with crocodile clips. Available as manual or with a pendant float switch, for automatic operation.

**Fluid:** Clean & dirty water | Temperature: 0 - 35°C

**Application:** Industry | Processing | Leisure | Bilges | Transfer | Sumps

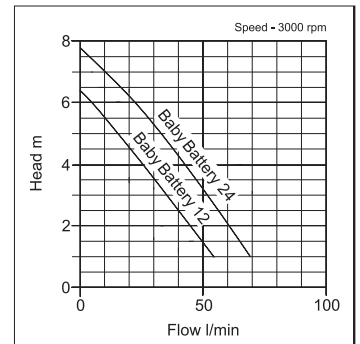

BABY BATTERY	<b>Impeller</b>	<b>Shaft seal</b>	<b>Level switch (automatic)</b>
	Open	Lip	Pendant (optional)

Pump	<b>Outlet</b>	<b>Handle</b>	<b>Outer cover</b>
	Polypropylene	Polypropylene & glass fibre	Polypropylene & glass fibre
	<b>Pump casing</b>	<b>Impeller</b>	<b>Shaft</b>
	Polypropylene & glass fibre	Nylon & glass fibre	S/S 304
	<b>Shaft seal</b>	<b>Pump casing &amp; strainer</b>	<b>Level switch</b>
NBR	Polypropylene	Polypropylene	

Motor	<b>Insulation</b>	<b>Motor cover</b>	<b>Power cable (5mtr)</b>
	Class B	Aluminium	PVC



**Baby Battery manual**



**Baby Battery auto**

item code	model	Manual or Auto	outlet (mm)	volt (dc)	watt	amp	flow (l/min)	head (mtrs)	free passage (mm)	dia x h (mm)	dry weight (kgs)
22-10-1025	Baby Battery 12	M	25	12	175	14	55	6.3	1.7	Ø170x260	3.6
22-10-1038	Baby Battery 12	A	25	12	175	14	55	6.3	1.7	Ø170x260	3.6
22-10-1012	Baby Battery 24	M	25	24	220	8.8	69	7.8	1.7	Ø170x260	3.6
22-10-1026	Baby Battery 24	A	25	24	220	8.8	69	7.8	1.7	Ø170x260	3.6