

TDA-4C / TD1000A LEARNING PROCEDURE


There are two ways to learn your new learnable sensors into you TDA-4C/TD1000A monitoring kit, follow the steps below to successfully install your new Sensor.

Method 1:

- 1) With the Monitor powered **OFF** - Hold down the Top **Mute button** on the right hand side of the monitor and continue to hold the **Mute Button** down while powering the monitor **ON** with the switch located on the right hand side of the Monitors Enclosure. **DO NOT RELEASE MUTE BUTTON UNTIL "L.E.N." APPEARS/DISPLAYS ON THE MONITOR.** Once "L.E.N." appears on the monitor, release **Mute Button**.
- 2) Obtain the new Learnable Sensor/Sensors and take off the cap of the sensors to allow the battery to be inserted.
- 3) With the Cap off and the battery out, insert the battery into the sensor and the monitor will beep and the position of the new learnable sensor will change on the display. See **Fig 2.** As an example where Position 3 (**left Hand Rear**) Press middle Button (**TEMP BUTTON**) to exit learn mode, Process complete. **Note: If the Monitor doesn't beep, try removing or inserting the battery a few times.**

Method 2:

- 1) Turn the monitor on and wait 3 seconds, the vehicle layout will be displayed on the monitor. Press and Hold top Mute Button for around 10 seconds ("**SET UNI**" WILL APPEAR BEFOR "L.E.N." CONTINUE TO HOLD BUTTON) until L.E.N. appears on the screen. Once L.E.N. appears on screen, follow steps 2 and 3 in Method:1

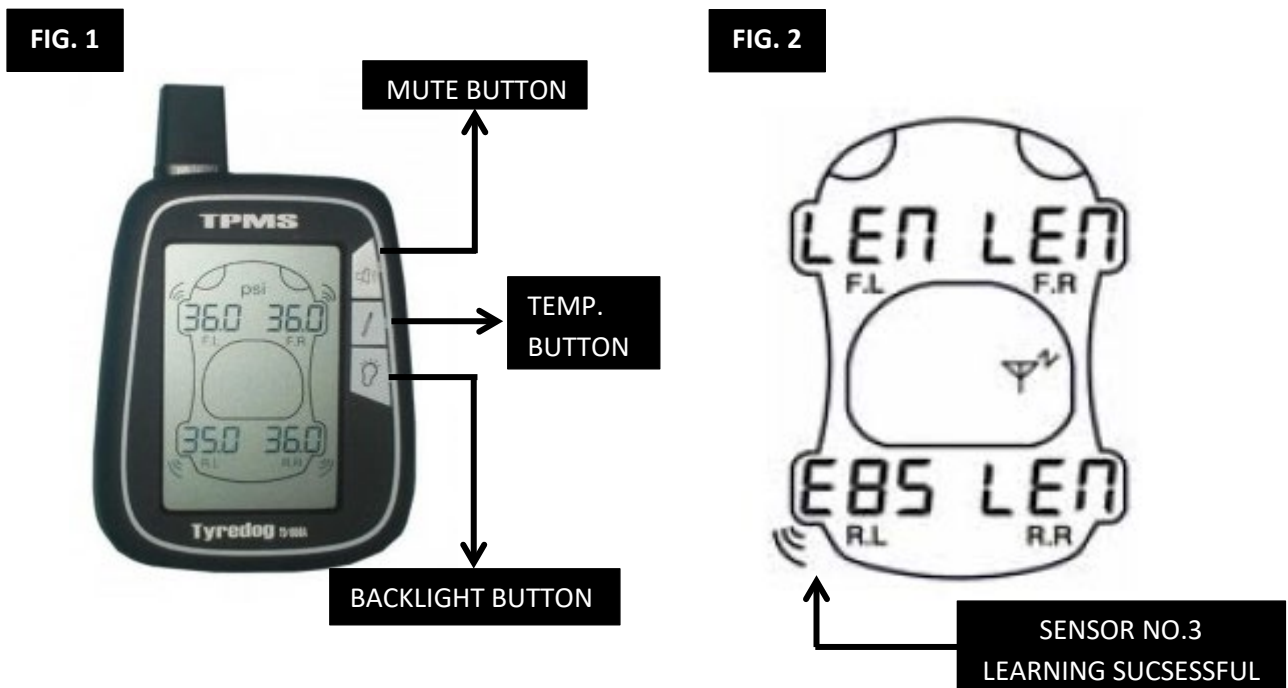

This product contains Lithium Button Batteries.

WARNING: KEEP BATTERIES OUT OF REACH OF CHILDREN
Swallowing may lead to serious injury in as little as 2 hours or death due to chemical burns and potential perforation of the oesophagus.

If you suspect your child has swallowed or placed a button battery inside any part of the body seek medical advice immediately.

Australia Poisons Hotline: 13 11 26

New Zealand Poisons Hotline: 0800 POISON (0800 764 766)

