


TD-1800F EXTERNAL SENSOR LEARNING PROCEDURE

Please read and follow the steps below carefully to ensure your new Tyredog Sensor/Sensors are installed correctly. If install procedure is unsuccessful try procedure again, if all else fails please contact www.tyredog.com.au

- 1) Turn Monitor on, you can use X2 AAA batteries or the supplied 12V cable to power monitor on, wait until monitor start up screen has finished and move to step 2.
- 2) Press and hold the **SET (TOP Button)** button on the top left hand side of monitor for 2 seconds until menu/option screen displays.
- 3) Press **Tyre Button (BOTTOM Button)** twice to scroll to option “Learn New Sensor”
- 4) Press and Hold the **Tyre (BOTTOM Button)** to enter “Learn New Sensor” The Monitor will display X4 Tyre locations, each location will be blank “- - -” with three lines though the middle of the sensor location to indicator learning mode.
- 5) Obtain your new Sensor/Sensors and take the cap off and insert a battery inside the sensor, the monitor will beep and the position location of the sensor will change.
- 6) Process Complete, put cap on sensor and install to valve on vehicle.

NOTE: IF THE MONITOR DOESN'T BEEP WHEN INSERTING THE BATTERY, REMOVE AND INSERT THE BATTERY SEVERAL TIMES.

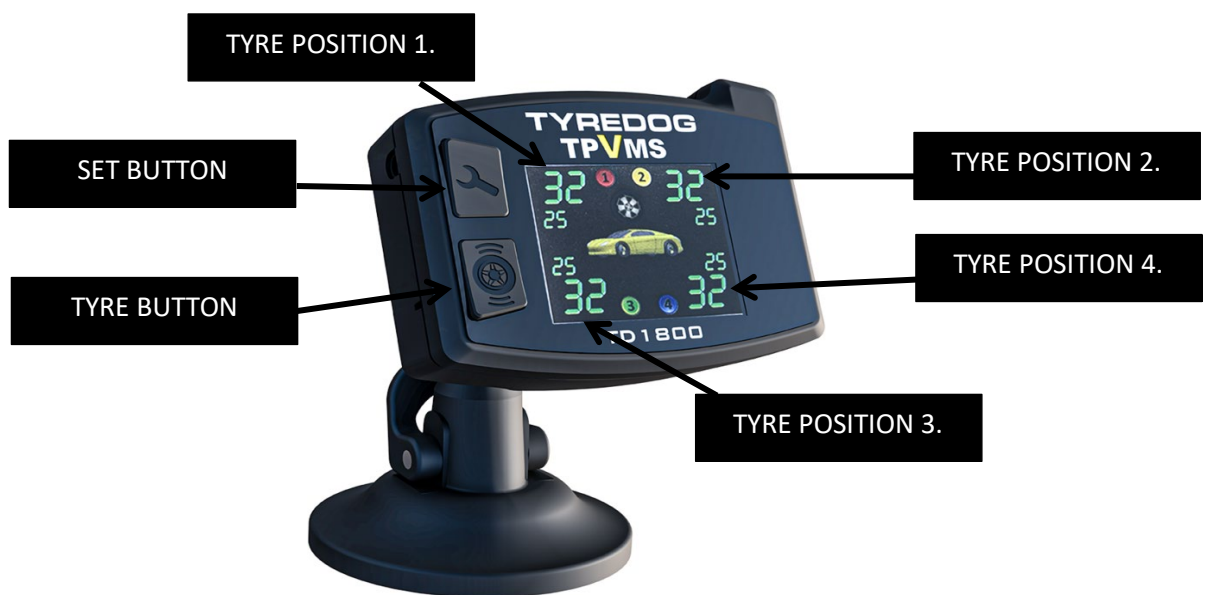

This product contains Lithium Button Batteries.

WARNING: KEEP BATTERIES OUT OF REACH OF CHILDREN

Swallowing may lead to serious injury in as little as 2 hours or death due to chemical burns and potential perforation of the oesophagus.



If you suspect your child has swallowed or placed a button battery inside any part of the body seek medical advice immediately.

Australia Poisons Hotline: 13 11 26

New Zealand Poisons Hotline: 0800 POISON (0800 764 766)