

Product data sheet

Specifications

SQUARE D



Mini circuit breaker, E-Frame, 20A, 3 pole, 480Y/277 VAC, 65 kA max, bolt on, shunt trip

EGB34020SA

Main

Range of product	125 A Frame EDB-EGB-EJB
Product or component type	Miniature circuit-breaker
Device short name	EGB
Module type	E-Frame
Trip unit rating	875 A

Complementary

[In] rated current	20 A
Maximum operating voltage	480Y/277 V AC
AWG gauge	AWG 12...AWG 6 aluminum AWG 14...AWG 6 copper
Breaking capacity	35 kA 277 V AC 65 kA 240 V AC 35 kA 480Y/277 V AC 65 kA 120 V AC 65 kA 120/240 V AC
Circuit breaker application	HACR rated HID rated
Electrical connection	Lugs aluminum
Holding current	270 A
Local signalling	Trip indicator
Mounting mode	Bolt-on
Number of poles	3
Number of spaces	4
Number of spaces required	4
Product destination	NF panelboard
Protection type	Overload Short-circuit
Device composition	Shunt trip
Trip unit technology	Thermal-magnetic
Breaking capacity code	G
Tightening torque	30.09 lbf.in (3.4 N.m) 0.00...0.02 in ² (2.5...16 mm ²) AWG 14...AWG 6)
Height	5.66 in (143.76 mm)

Width	3.92 in (99.57 mm)
Depth	4.05 in (102.87 mm)
Net weight	4 lb(US) (1.81 kg)

Environment

Product certifications	cULus
Ambient air temperature for operation	104 °F (40 °C)


Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.30 in (16.002 cm)
Package 1 Width	6.20 in (15.748 cm)
Package 1 Length	9.90 in (25.146 cm)
Package 1 Weight	4.34 lb(US) (1.97 kg)

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes


Dimensions

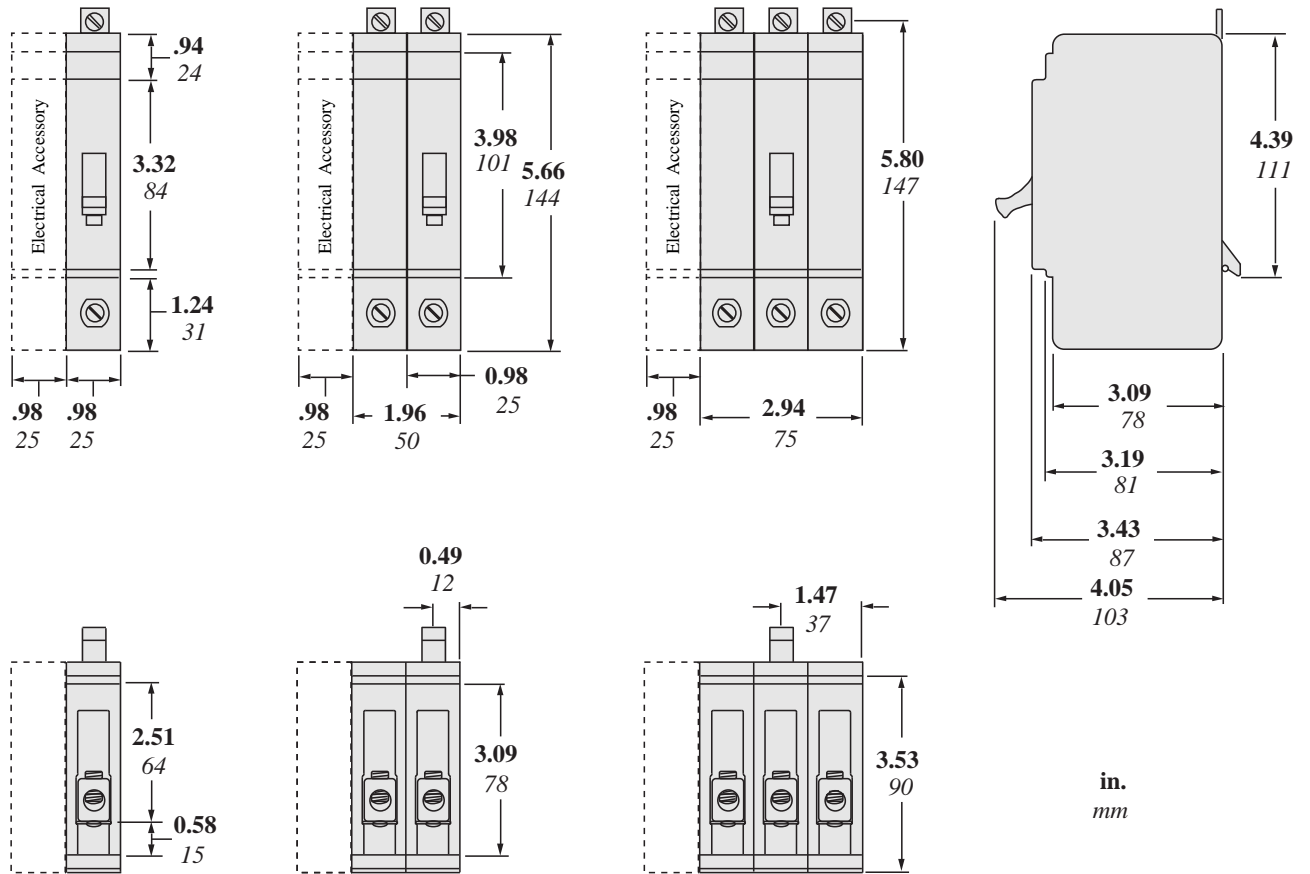

All dimensions are approximate.
 Also see technical drawings and/or documentation.

Wiring Diagram

Shunt Trip /
Disparo en derivación /
Déclencheur shunt

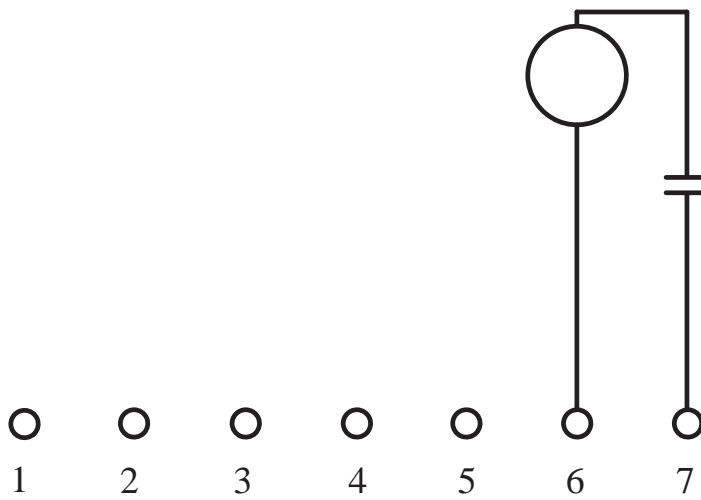

Recommended replacement(s)