



BETA-6 Cut Sheet

Features

- Built-in Photocell detecting day&night status
- LED display , easy operation
- Alternative humidifying or dehumidifying function
- Sensor with 16ft long cable for close placement to plant canopy

Overview

The BETA-6 features a precision humidity sensor within a 16ft remote probe assembly. Simply plug in your humidity / dehumidify device to the power outlet on the bottom of the BETA-6. The user can select separate “day / night” humidity settings and the photocell built into the BETA-6 will automatically start controlling your device. (Settings from 20-90% rH) Either humidifiers or dehumidifiers can be controlled by the BETA-6.



M Product Specifications

Dimensional Diagram

Package Content

- 1 x Humidity Controller
- 1 x Humidity Sensor

Input Voltage

120 Volts AC

Output Switch

Relay

Fuse Rating

6A/250V

AC Power Cord Length

1.8m

Humidity Control Range

20-90%

Humidity Deadband


5°F

Package Dimensions

275mm(L) x 87mm(W) x 94mm(H)

G.W. per pack

0.56kgs

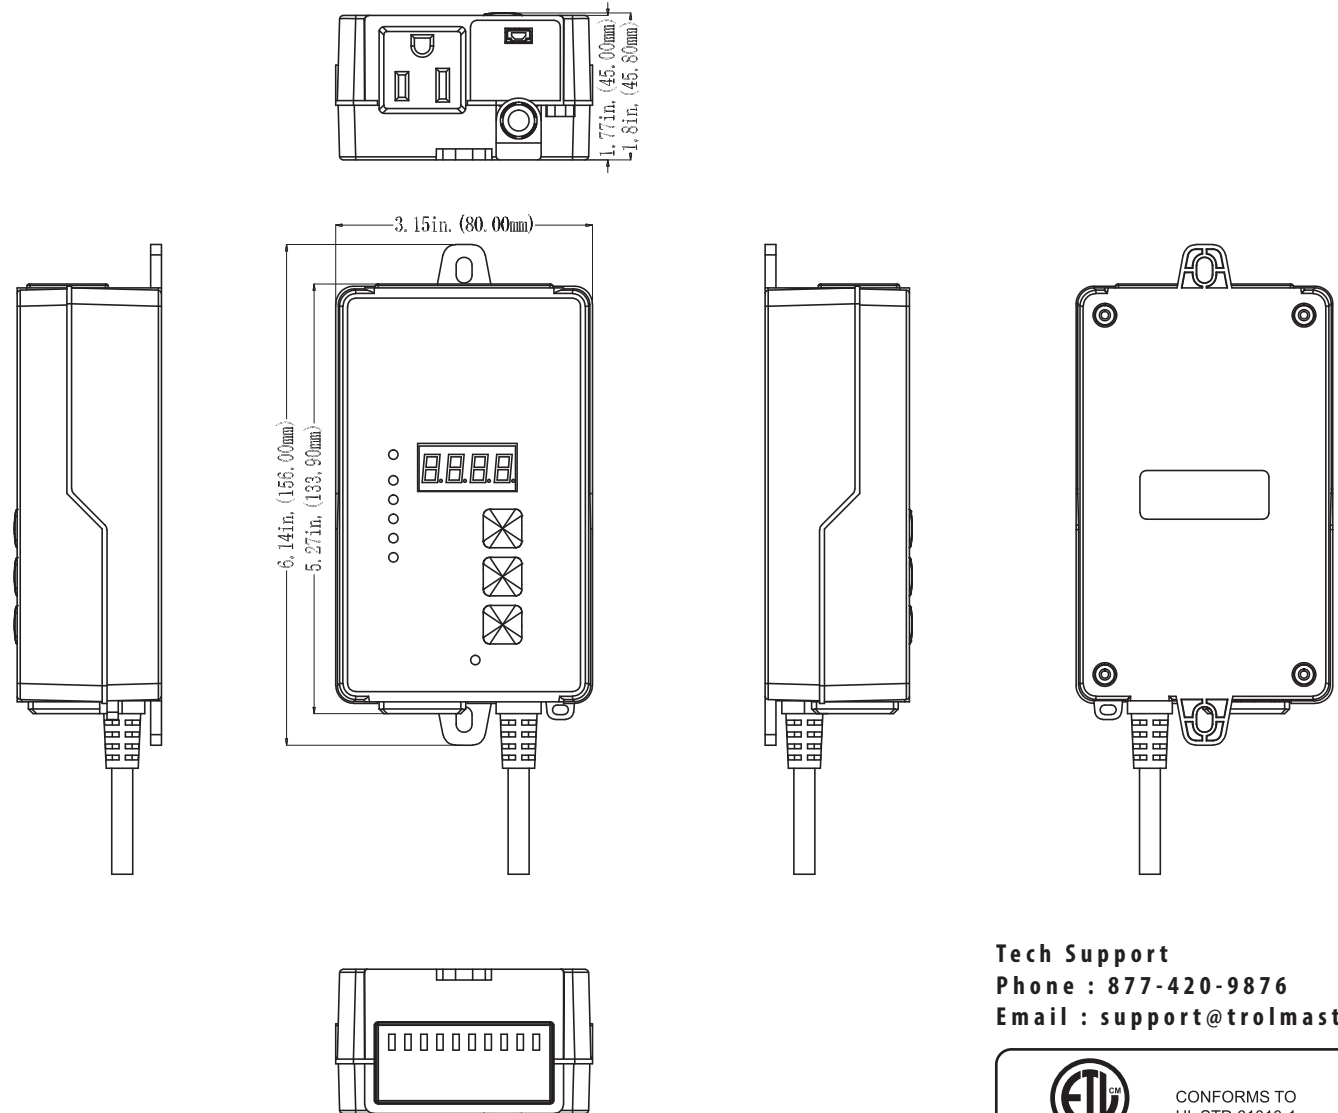

Tech Support

Phone : 877-420-9876

Email : support@trolmaster.com



Intertek
5008191

CONFORMS TO
UL STD.61010-1
CERTIFIED TO CSA STD.
C22.2#61010-1