



630W

DE FIXTURE

CMH

VOLTAGE:

120V/240V

277V

347V

SKU:

IL-CMHDE630-120

IL-CMHDE630-277

IL-CMHDE630-347


- ◀ Energy efficient
- ◀ Uniform Light Distribution
- ◀ Soft Start Technology
- ◀ Ignition Failure Protection

SPECIFICATIONS 120V 240V 277V 347V

Input Current	5.56A	2.79A	2.4A	1.92A
Input Power	675W	675W	675W	343W
Rated Main Voltage	120V	240V	277V	347V
Voltage Range	108-264V		249-305V	312-382V
Operation Frequency	140-220Hz			
Main Frequency	50 - 60Hz			
THD	<15%			
Controller	0-10V Protocol			
Min Power Factor	0.95			
Crest Factor	<1.7			
Input Connection	IP68 Wieland Plug			
BTU Output	2,770 btu			
Relative Humidity	95% (Non-condensing)			
Operation Temp.	-20 - 40°C / -4-104°F			
Socket Type	K12x30s - / Style			
Max. Temperature	75°C/167°F			
Mounting Height	1.2m / 4'			



MOUNTING & COVERAGE


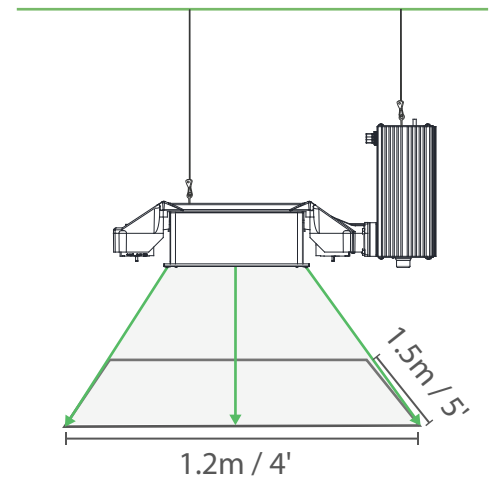


Recommended to use with ILUMINAR Touch or ILUMINAR HASH Controller.
Lamp Not Included.

PHYSICAL SPECIFICATIONS

	120/240V	277/347V
Case Length	318mm / 12.52"	318mm / 12.52"
Case Width	213mm / 8.39"	249.2mm / 9.81"
Height	597.9mm / 23.54"	597.9mm / 23.54"
Weight	6.6kg / 14.55lb	6.7kg / 14.77lb

249.2mm / 9.81"

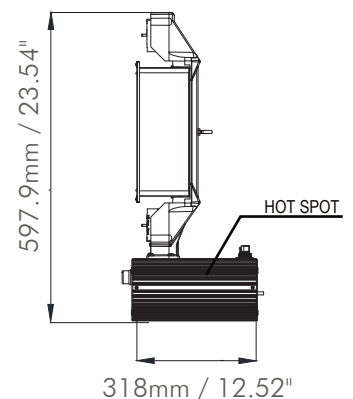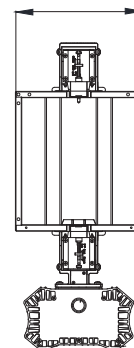

3 YEAR WARRANTY

iluminarlighting.com
Toll Free: 1-877-540-5588

© Copyright 2020 ILUMINAR Lighting
Subject to change without notice.