PCT-3

Drop-in/inline Heavy Duty Nutrient EC & Temp Sensor

The PCT-3 is a Heavy Duty EC & Temp Sensor designed to measure EC (electrical conductivity) & temperature of liquid solution.

PCT-3 sensor features an improved sensor element for an even more stable and reliable performance. Reduced length, diameter and a threaded body enable the PCT-3 sensor to fit into standard ¾" PVC tee fittings and other tight spaces in both drop-in or inline usage.



PCT-3 sensor can be connected to the Aqua-X maincontroller via AMP-2 sensor board module; or the Aqua-X Pro maincontroller via the AMP-3 sensor board module.


***Caution:** PCT-3 sensor probe must be wet at all times to maintain its best condition; a dried sensor can cause the PCT-3 unit to become defective.

Specifications PCT-3 **Packaging Dimensions** Output Connector Mini DIN male connector Size 275mm(L) x 85mm(W) x 95mm(H) **Working Environments** Package Content PCT-3 1 pc 32°-122°F Temperature EC & Temp Sensor Humidity ≤90% RoHS

Link Up

PCT-3



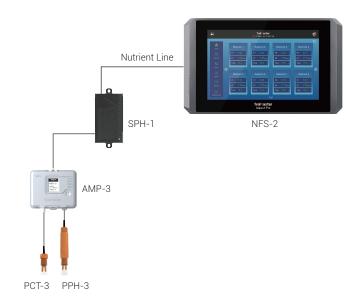

TrolMaster