



MAKE A DIFFERENCE

Hooke Road Front & Rear Fender for 07-18 Jeep Wrangler JK(4 Door)

Installation Time: 30 Minutes per side

Tools Required:

Phillips Screwdriver. Drill.

1/4" Drill bit. Socket Wrench


1/2", 11/32", and 10mm sockets.

1/2" wrench. Needle nose pliers. Pry bar.

Sawzall, jigsaw, or some sort of cutting tool.

Installation Instructions:

1. Unbox the Fender Flares. Like the picture.

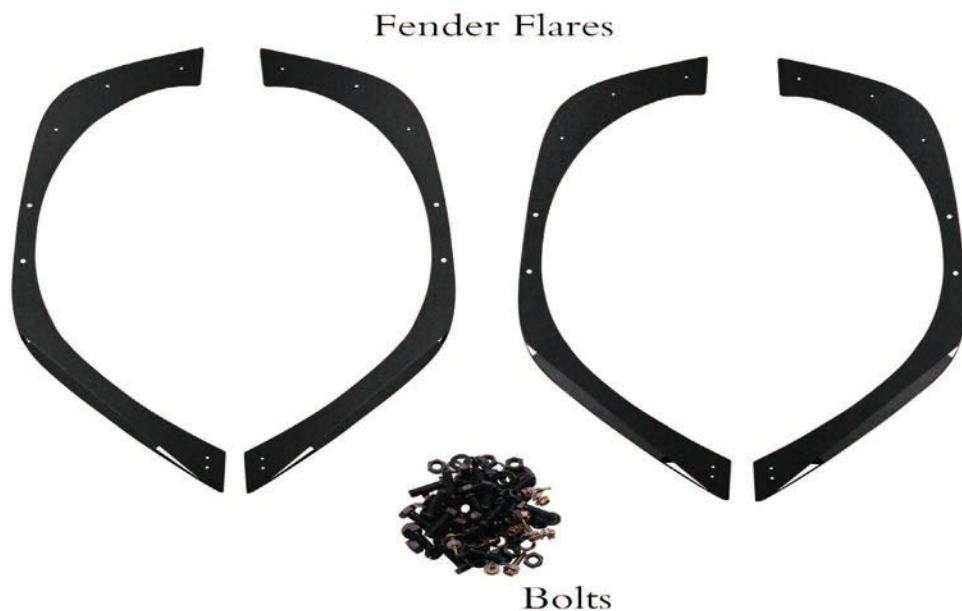

2. Started on the left side, but you can do either first. And the Rear wheel eyebrows need to drill five holes to install. The picture will show where

drilling is needed. Note: only rear fender flares need to drill.



4. The next step is to install it according to the drilling position.



5. Now the left side will be complete installation.



6. The installation method on the right is the same as the one on the left.

7. Complete installation.

