



# MAKE A DIFFERENCE

## Hooke Road Front Bumper & Grille Guard for 2007-2018 Jeep Wrangler JK & Wrangler Unlimited

Installation Time: 2 hours by 2 men (we recommend 3 men)

Tools Required:



19mm, 14mm Wrench & Socket.

Flat Screwdriver or Panel clip pliers .

Inner & Out Hexagon screwdriver.



INCLUDED COMPONENTS :

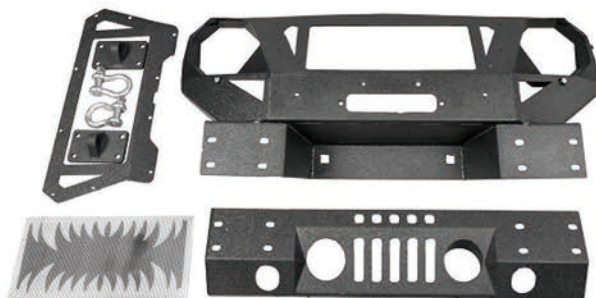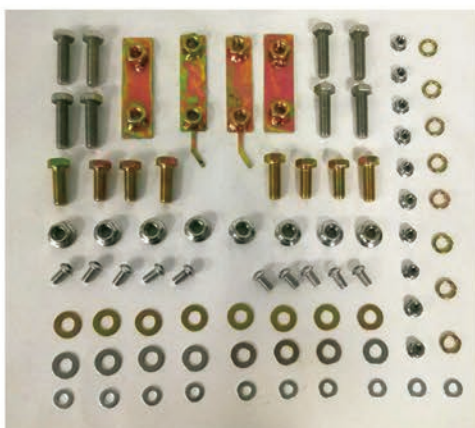

## Installation Instructions:


### STEP 1

Clean and ready to install part of the front bumper. The red circle in the picture is used to install the screws. And don't forget to remove the grille and open the hood before install the bumper. As shown below.




### STEP 2

Prepare the front bumper to start the installation.

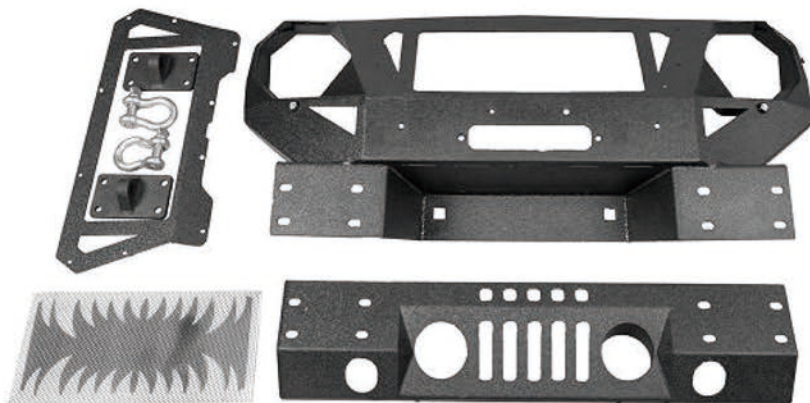

### STEP 3

Install the Extend iron plate on the bumper, as shown below. The both side is the same.

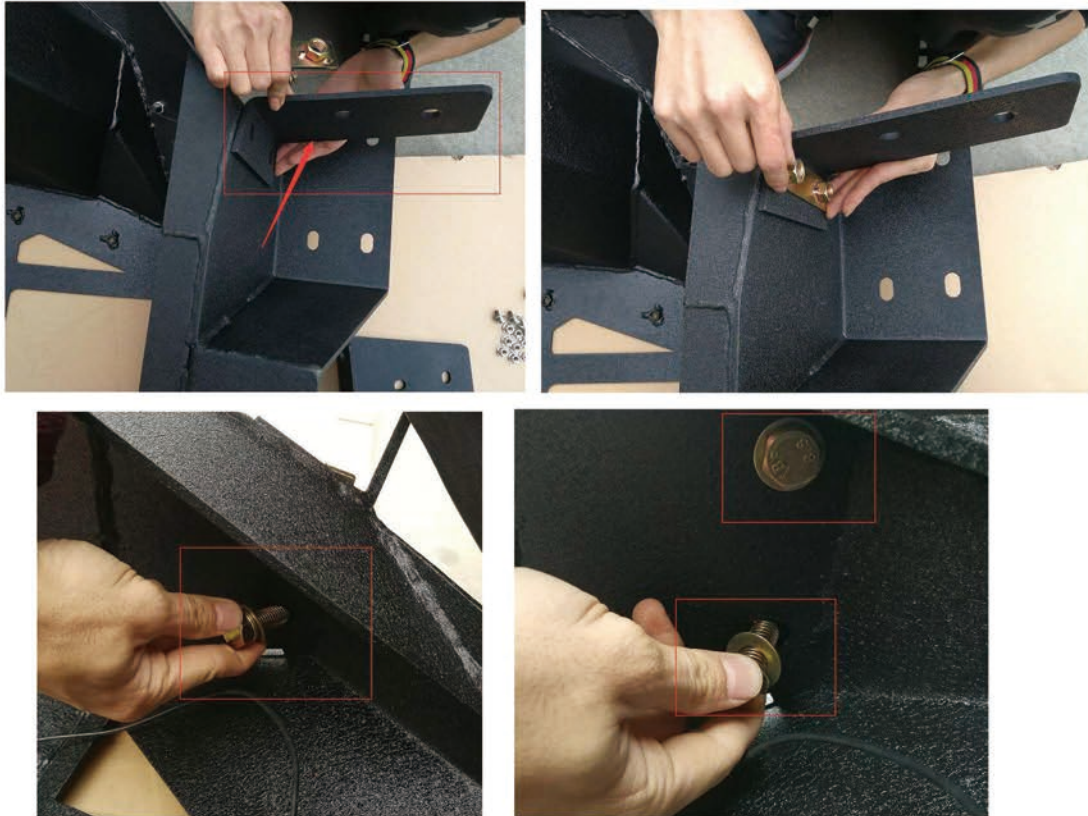

### STEP 4


After step 3, put the front bumper into the appropriate location. Then use the bolts to install and tighten it. As shown below. (The both side to install it is the same.)





### STEP 5

After above, install the bottom guard with the bolts. And don't forget to tighten it. As shown below.

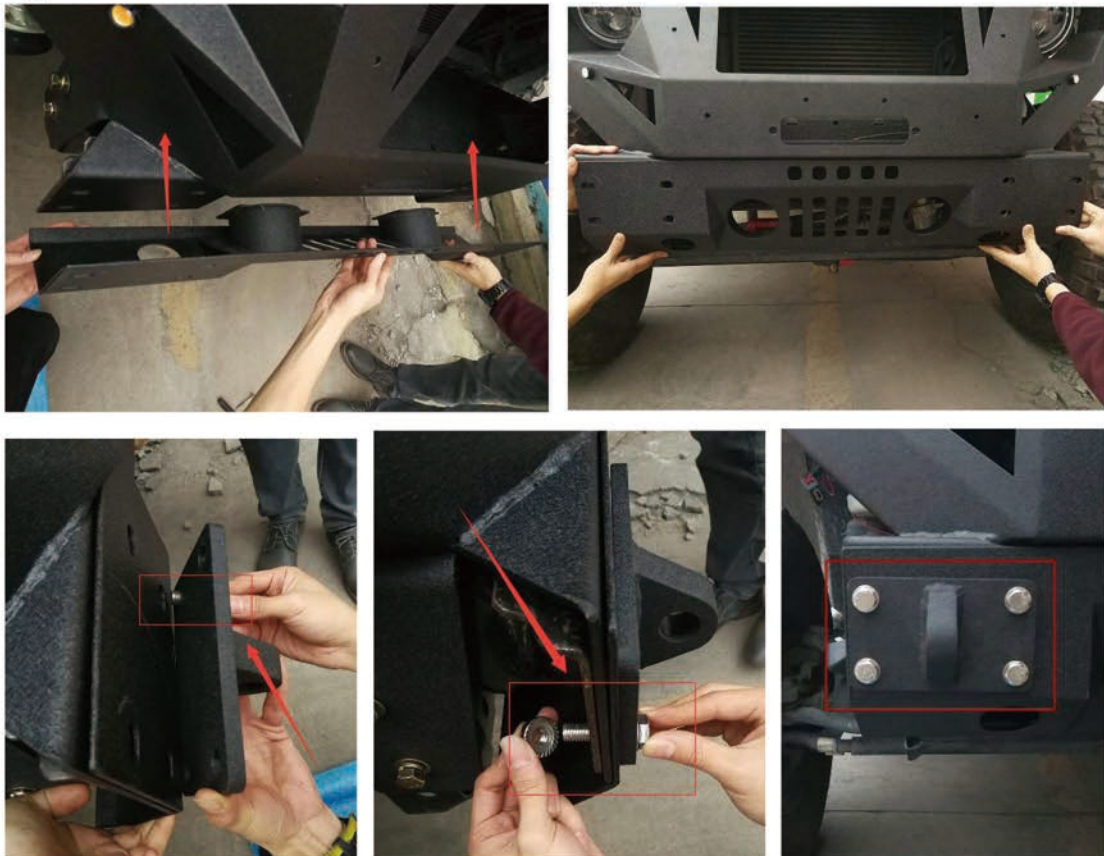

### STEP 6


After step 5, the front of your vehicle will look like the picture below.



### STEP 7

This step will install the iron net. Install by 2 men will be better. Put the iron net into the appropriate location. Then use the bolts to install and tighten it. As shown below.



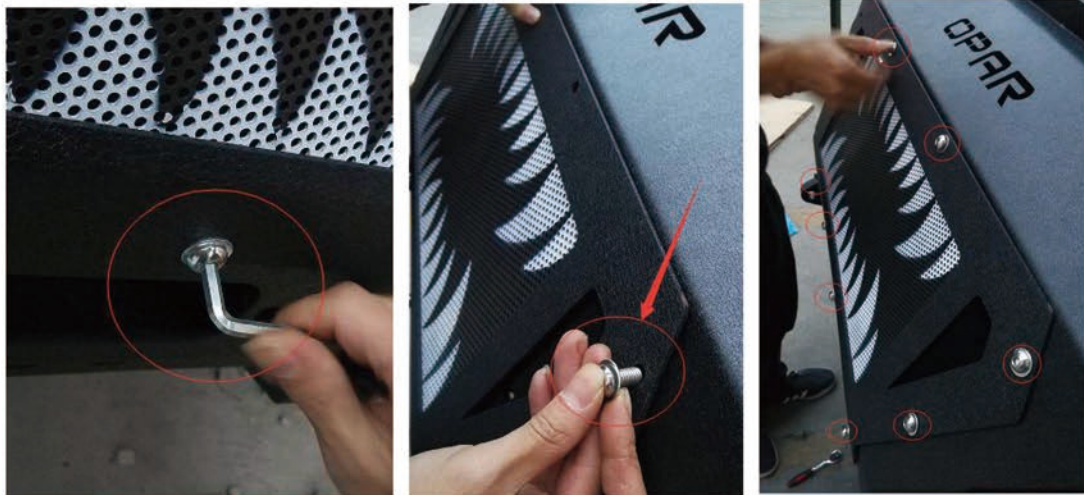

### STEP 7

After all above, then install the D-rings. The D-rings is very easy to install. As shown below.



### STEP 8

Once you have everything in place you are finished with installation. Congratulations on your new product.

