

# Davey & Company London Ltd.


Traditional Yacht & Ships Fittings Since 1885.

1, Commerce Way,  
Whitehall Road Ind. Estate,  
Colchester, Essex.  
CO2 8HR  
England.

Phone: +44 (0)1206 500945  
Fax: +44 (0)1206 500949  
E-mail: [chandlery@davey.co.uk](mailto:chandlery@davey.co.uk)  
Website: [www.davey.co.uk](http://www.davey.co.uk)



## Fly Screen Instructions

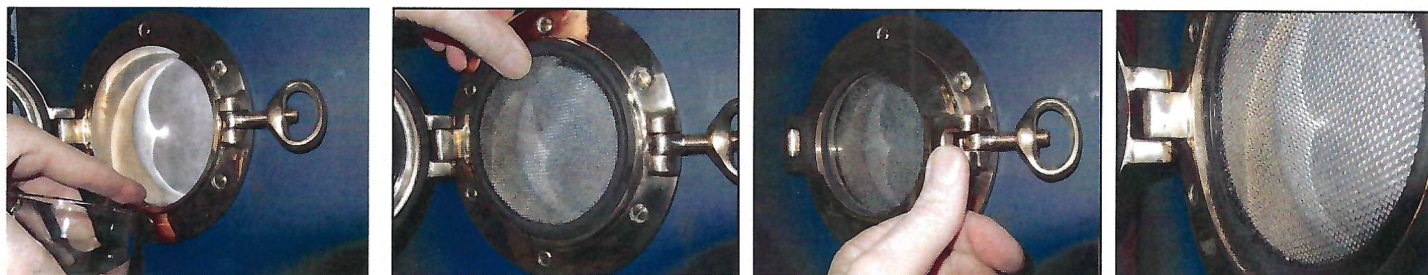

### To Fit

1. Wet the rim of the fly screen and the bore of the portlight with clean water to lubricate.
2. Place the fly screen flat against the opening of the portlight and ease it in by putting gentle pressure all around the edge until all of the fly screen is just inside the bore.  
DO NOT PUSH ON THE MESH. DO NOT PUSH TOO FAR IN.
3. Close the door fully. This will push the fly screen further in and align it correctly.
4. On opening the door again you should find that the fly screen is evenly positioned on the inside edge of the portlight bore. This is important as it will then have maximum contact with the portlight all around its perimeter. The installation is then complete.
5. If you are unhappy with the position of the fly screen, simply follow the instructions for removal and try again. You will soon get the knack!



### To Remove

1. Firmly press on a single point of the fly screen edge until it spins on its axis in the bore and the edge is pointing towards you.
2. Pull the fly screen out, clean with fresh water, dry and store until next required.

### The Full Range

There are fly screens to suit all current Davey round opening portlights with the reference 3035

<b>3020/SS/080</b>	To suit 3.1/4" portlight 3035/GM/080
<b>3020/SS/100</b>	To suit 4" portlight 3035/GM/100
<b>3020/SS/125</b>	To suit 5" portlight 3035/GM/125
<b>3020/SS/150</b>	To suit 6" portlight 3035/GM/150
<b>3020/SS/200</b>	To suit 8" portlight 3035/GM/200