

# IQTT-S Temperature Transmitter



## Features

- EXD / CCS certified
- Compact size, easy installation
- Zero and span adjustable
- Local display optional
- Multi-output signals
- Convenient field configuration

## Introduction

IQTT-S temperature transmitter is available for measuring temperature from -200 °C ~ 500 °C of various liquid, gas or solid surface directly. It uses special temperature module to make linearity correction on temperature sensing element, outputting a standard analog/digital signal. With various outputs, it is easy to apply for temperature measurement in many different fields including petroleum, metallurgy, chemical industry, power station and light industry, etc.


## Specifications

- Temperature Ranges: -200°C~0°C~500°C
- Power Supply: 10V ~ 30V DC (Typical: 24V DC)  
15V ~ 30V DC (Display)
- Output: 4mA ~ 20mA DC  
4mA ~ 20mA DC + HART  
4mA ~ 20mA DC + RS485  
RS485; Thermal Resistance
- Accuracy: ±1.0%FS (-200°C~0°C~500°C)  
±0.5%FS (-40°C~0°C~150°C)  
±0.25%FS (-20°C~0°C~105°C)
- Display: 4-digit LCD/LED
- Insulation Resistance: ≥ 20MΩ@500V DC
- Stability: ±0.5%FS/year (general)
- Ambient Temperature: -25°C~70°C
- Relative Humidity: < 95%
- Storage Temperature: -40°C~120°C
- Weight: About 1100g (header)
- Flameproof Sign: Ex d IIB T6 Gb

## Construction Material





- Electronic housing: aluminum alloy
- Media wetted material: 304 stainless steel  
316 stainless steel/others
- Temperature sensing element: PT100/PT1000
- Display window: flameproof glass

## Outline Construction (Unit: mm)

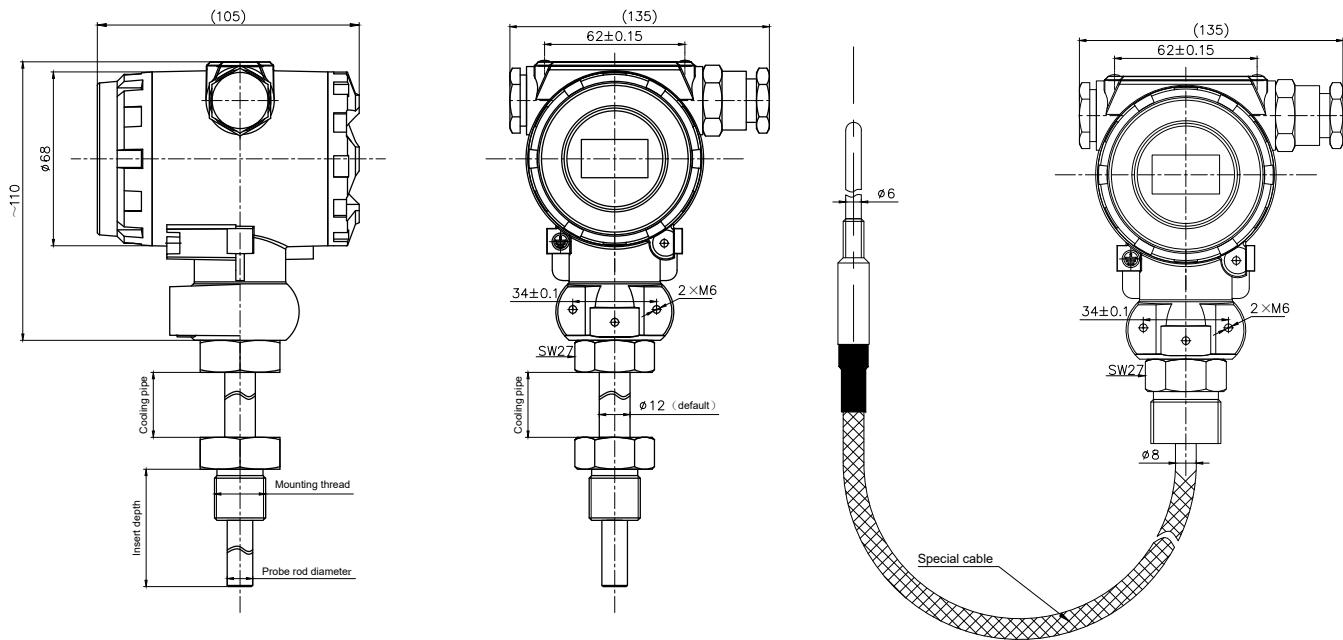

Integrated Type


Split Type

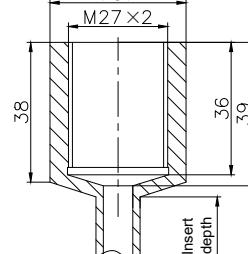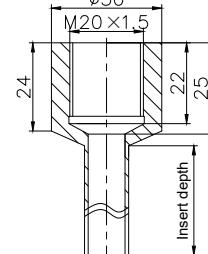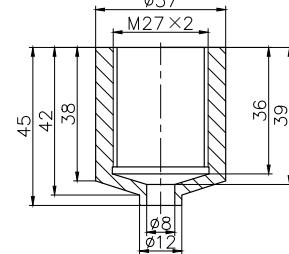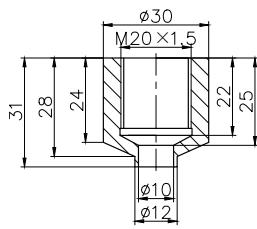


Welding base

Welding sleeve

## Electrical Connection

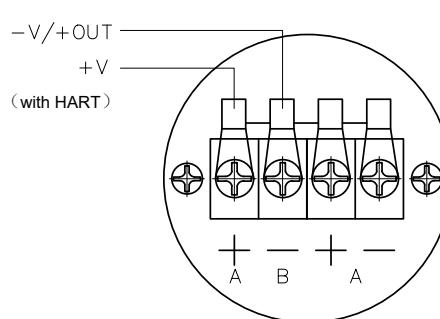

2-wire current with HART

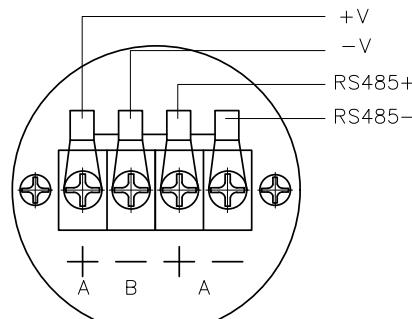

RS485

## Order Guide

IQTT-S	Temperature Transmitter	
Range	[X ~ Y°C ] X,Y is the temperature upper limit and lower limit, unit °C .(full range -200°C~ 500°C )	
L	Accuracy: ±1.0%FS (-200°C...0°C~ 500°C )	
M	Accuracy: ±0.5%FS (-40°C...0°C~ 150°C )	
H	Accuracy: ±0.25%FS (-20°C...0°C~ 105°C )	
Code	Output Signal	
E	4mA ~ 20mA DC	
EH	4mA ~ 20mA DC + HART	
R8	RS485	
ER8	4mA ~ 20mA DC + RS485	
Z	Thermal resistance	
Code	Protection pipe diameter Unit: mm	
6	φ6	
8	φ8	
12	φ12	
16	φ16	
612	Inner pipe φ6, Outer pipe φ12 (φ12 welding casing)	
816	Inner pipe φ8, Outer pipe φ16 (φ16 welding casing)	
Code	Installation Method and Process Connection (Split type: Header default)	
I	Fixed thread installation, M20×1.5 male, thread length 18mm	
II	Fixed thread installation, M27×2 male, thread length 32mm	
III	Fixed thread installation, G1/2 male, thread length 20mm	
IV	Fixed flange installation (DN10, DN15, DN20, DN32...)	
V	Chuck installation (Clamp φ25.4, φ50.4...)	
VI	Movable flange installation (DN10, DN15, DN20, DN32...)	
VII	Fixed thread installation, M16×1.5 male, thread length 18mm	
VIII	Fixed thread installation, G3/8 male, thread length 14mm	
IX	Other standard thread sizes, please note	
X	Fixed thread installation, NPT1/4 male, thread length 14mm	
XI	Fixed thread installation, G1/4 male, thread length 14mm	
Insert depth	Protection pipe insert depth (unit mm)	
XXX	According to the actual length required (the product with a base installation is required, the insertion depth is the size except the base)	
Code	Wetted part	
1	SS304 (default)	
2	SS316L	
3	PTFE sleeve	
4	Other materials, please note	
Code	Display type	
A	LCD display	
B	No display	
C	LED display (no flameproof type)	
Code	Other	
d	EXD (Exd II BT6Gb)	
T	CCS	
N	Null	
Code	Cooling pipe (unit: mm)	
XXX(Integrated)	0mm [-50°C~ 100°C ]	
	00mm[-200°C~ 150°C ]	
	50mm[-200°C~ 500°C ]	
F	Split Type	
IQTT-S [0□200]□ L- E - 6 - I - 200 - 1 - A - d - 150	Complete specification	

## Split type Order Guide

F	Split type, please continue to choose according to the following selection							
	Code	Cable length						
	XXX	Specific length of high temperature shielded cable (unit: meter)						
	Code	Cable form						
	N	Non-armored cable						
	KK	Armored tube cable (stainless steel corrugated tube)						
		Code	Probe fixing method					
		GL	Fixed thread installation,					
		KT	Movable thread installation					
		FL	Fixed flange installation					
		KG	Chuck installation (Clamp $\phi 25.4, \phi 50.4\dots$ )					
		TR	Immersion					
		BG	Clamp type (The diameter of the protective tube can be customized)					
		TP	Surface mount type(The diameter of the protective tube can be customized)					
***-	F	-	5	-	Kk	-	TR	Split type specification

### Notes

1. If there is no special requirement, except the probe part and explosion-proof housing, other materials are stainless steel 304.
2. For the content not included in the order guide selection, please consult our company for customization. This item is replaced by '\*', and please explain them in the remarks or provide drawings.
3. Clamp type and surface mount type have a large deviation due to different environmental temperature. It is recommended to add heat preservation measures.
4. For example: IQTT-S [0□□200□]L-E-6-\* -300-1-A-d-150
5. Description: IQTT-S temperature transmitter, accuracy  $\pm 1.0\%FS$ , range  $[0^\circ C \sim 200^\circ C]$ , 4 ~ 20mA output, probe outer diameter 6mm, installation method shown in the drawings, protection pipe insertion depth 300mm, protection tube material SS304, LCD display, flameproof, cooling part length 150mm.