

SPECIFICATION SHEET

BPL-100

Fixture Specifications:

Housing: Die-cast aluminum

Swivel: Die-cast aluminum swivel, with 1/2 NPT hub on bottom.

Finish: Polyester UV powder coated, available in **BLK- Black**, **RST-Rust**

Socket: G4 socket.

Lamp: 12V, JC Two Pin G4 halogen bulb 20W standard, 50W Max.
LED lamps available in 3W, with 2700K white color temperature

•Directional Light


•Aluminum

Wiring: Fixture is prewired with a 3ft 18-2 direct burial cord. Silicone filled wire nut BPL-80 available from BestProLighting.com
Wire nuts sold separately.

Mounting Spike: Black 8 1/2" ABS spike with 1/2" NPT male hub on top

Electrical Notes: A 12V transformer is required. Options are available from BestProLighting.com
Voltage range for 12V halogen lamps are 11V-12.5V
Voltage range for LED lamps are 8V-21V.
Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited five (5) year warranty on fixture housing and and stem against manufacture's defects.

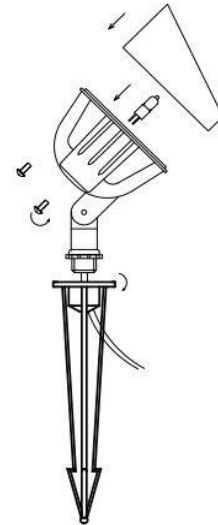

AVAILABLE LED LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
3WG4LED 3		360°	270	2700K	50000	20 Watt

AVAILABLE HALOGEN LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS
		SPREAD	LUMEN		
JC Bin Pin G4 10W	10	360°	75	2700K	2000
JC Bin Pin G4 20W	20	360°	190	2700K	2000
JC Bin Pin G4 35W	35	360°	265	2700K	2000
JC Bin Pin G4 50W	50	360°	400	2700K	2000

For additional lamps and accessories, visit bestprolighting.com

