


## HOW TO FILL



Remove water tank cap.



Add hot or cold clean water. 33°F -120°F

Replace water tank cap.




Your RinseKit XL can spray water in the vertical position or in the horizontal position as shown below.

## HOW TO USE



Press power button to turn on system. Pump will turn on and off automatically.

Pump will NOT turn off automatically when water tank is empty!

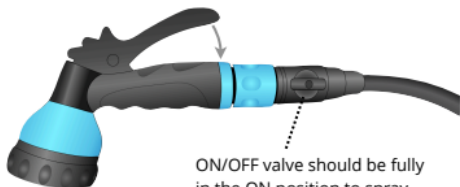

ON/OFF valve should be fully in the ON position to spray.



The volt meter will show the battery life.  
13v to 11v = Normal range  
10.8v or lower = Charge battery  
Below 10.5 volts can damage the battery.



**WARNING: DO NOT USE SPRAY FUNCTION WHEN TANK IS EMPTY.**  
The pump will NOT automatically turn off if the water tank is empty. Running the pump dry for more than a few minutes can cause overheating.



#### **YOUR RINSEKIT COMES WITH A WARRANTY.**

For more information, please visit [www.RinseKit.com](http://www.RinseKit.com) and click on the warranty tab.

Note: receipt/proof of purchase will be required to file a warranty claim.



For maintenance tips, troubleshooting steps and best practices:  
[www.RinseKit.com](http://www.RinseKit.com) | 800-613-5764 | [info@RinseKit.com](mailto:info@RinseKit.com)



#### **FREEZING CONDITIONS WILL DAMAGE YOUR RINSEKIT!**

For cold conditions or longterm storage, drain all of the water out of the tank, then keep nozzle on for 30 seconds to allow the pump to push all of the water out of the system.

## **OTHER INFORMATION**

### **Cleaning & Care**

- Do not freeze.
- Spray vinegar through unit to clean the internal parts.
- Only use clean water or you may clog the system.
- Do not run pump without water!
- Keep upright to prevent leaking.

### **Other Information**

- Ok to use with hot and cold water 33°F -120°F.
- BPA free materials.
- Pump may vibrate when using mist spray setting.

### **Storage**

- For prolonged or cold storage drain all the water out and allow pump to run dry for 30 seconds to remove water out of the system.
- Periodically charge battery to keep voltage above 10.8v.
- For prolonged storage, keep unit horizontal with water tank cap up for proper battery orientation.



PB NONSPILLABLE  
LEAD-ACID BATTERY  
12.5V 5.0 Ah / 20HR

# IMPORTANT CARE INSTRUCTIONS

---

- The PRO PAK comes with Super-O zipper lubricant oil to help maintain the integrity and ease of use for the unit's zipper. Apply as needed.
- After every 1-3 uses we recommend drying out your PRO PAK. To do this, make sure the unit is completely empty, allow the pump to run dry for 30 seconds to get any remaining water out of the hose. Zip open the top of the PRO PAK. Next, remove the water tank cap to allow any remaining water to evaporate. **There is no need to remove any of the PRO PAK's internal components.** Allow about 4-6 hours for the unit to dry thoroughly.
- To clean the internal parts of the PRO PAK, you can run a solution of equal parts vinegar and water through the unit. A mixture of mild soap and water can also be used. Be sure to flush the unit with fresh water to ensure all soap particles are removed from the internal hose.
- After several uses, check the water tank cap's O-ring to ensure it is lying flat. With continuous use, it may fold or slip out of place.

# CARRYING INSTRUCTIONS FOR THE PRO PAK XL

---

- We recommend carrying the PRO PAK from its backpack straps. The unit will be about **60lbs** when it is completely full of water, but you can customize the capacity to whatever weight is comfortable for you to carry.
- Use the unit's side handles for easy maneuvering however, **DO NOT LIFT** the PRO PAK from a singular side handle **when filled with water.**

