




## FEATURES

- ✓ Smooth indicator shape with steady performance PCB board, is suitable for industrial or commercial use
- ✓ Multiple weighing units: (lb/oz/kg)
- ✓ Gross/Tare/Zero
- ✓ Low power design, longer battery usage time
- ✓ Hold function, locks the weight
- ✓ Idle mode and automatic power-off function
- ✓ Low-battery detection and warning
- ✓ 6 digits 0.7" tall LCD display with backlight
- ✓ Splash-proof keyboard and display
- ✓ RS232 Output
- ✓ Only prints with LS-25-T Thermal receipt printer (Label papers also available)
- ✓ Stainless steel wall mount bracket included
- ✓ 5 year warranty

## OPTIONS / ACCESSORIES

- ✓ Thermal Ticket Printer
- ✓ Stainless Steel Stand
- ✓ Painted Mild Steel Stand

## DIMENSIONS

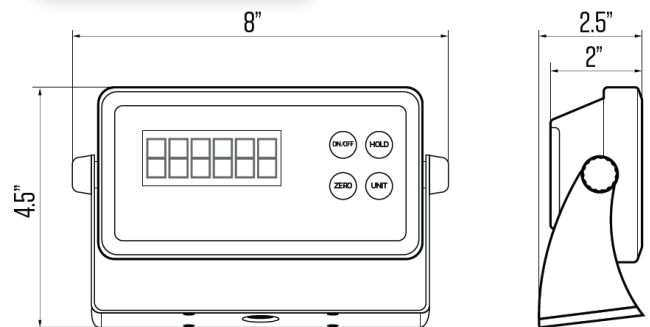

## SPECIFICATIONS

- ✓ **Display:** 6 digit 0.7" tall LCD display with backlight
- ✓ **Units:** lb, kg (primary); oz (secondary)
- ✓ **Accuracy Class:** OIML III, n=3000e
- ✓ **Resolution:** 120,000 dd industrial; 10,000 dd HB44
- ✓ **Load Cell:** 4 load cells of 350  $\Omega$  maximum
- ✓ **Load Cell Excitation:** 5  $\pm$  0.5VDC
- ✓ **Display Resolution:** Up to 1/15,000 Display Resolution
- ✓ **Operating Temp.:** 14  $^{\circ}$ F to 104  $^{\circ}$ F (-10  $^{\circ}$ C to +40  $^{\circ}$ C)
- ✓ **Weight:** 1.2 lbs
- ✓ **Display Resolution:** Up to 1/15000
- ✓ **Display Increment:** Selectable 1, 2, 5, 10, 20, 50
- ✓ **Decimal Point:** Selectable 0, 1, 2, 3, 4 decimal places
- ✓ **Tare range:** 2%~100% max. capacity
- ✓ **Initial zero range:**  $\pm$ 10% max. capacity
- ✓ **Manual zero range:**  $\pm$ 2% max. capacity