Rear License Plate Bracket Install Instructions

Thank you for purchasing a C4 Fabrication Rear Bumper! The following instructions will show how to install your Rear License Plate Flip-Up Bracket.

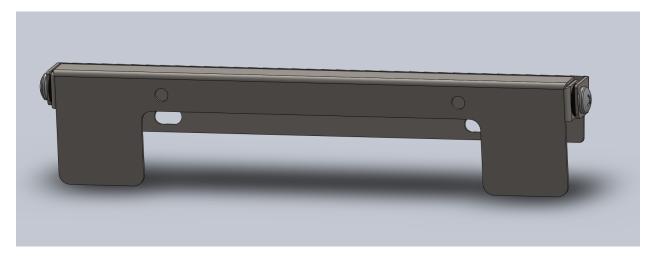


Figure 1. License Plate Flip-Up Bracket

In Figure 1 the two pieces of the License Plate Flip-Up Bracket are shown. The rear bracket will mount to the sloped face of the bumper. The front bracket will mount to the license plate. Table 1 list all the supplied hardware for installing the License Plate Flip-Up Bracket and license plate to the rear bumper.

Table 1. Included Hardware

Item	Qty
5/16" Nyloc Nut	2
5/16" x ¾" Button Head Bolt	2
5/16" Nylon Washer	2
¼" Flat Washer	8
¼"x 3/4" Button Head Bolt	2
1/4" Nyloc Nut	2

First start by attaching the two brackets together. There will be a 5/16" nylon washer placed **between the two brackets.** Figure 2 shows an exploded view of how the hardware is attached. Place the 5/16" button head bolt through the holes connecting the two brackets with the nylon washer sandwiched between. Now place the $\frac{1}{4}$ " flat washer and $\frac{5}{16}$ " nyloc on either side respectively.

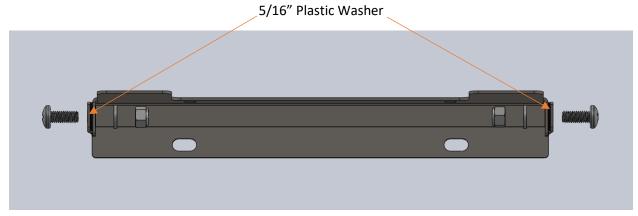


Figure 2. Hardware Exploded View

Next mount the license plate to the bracket using the supplied $\frac{1}{2}$ " x $\frac{3}{4}$ " button head bolt, $\frac{1}{4}$ " flat washer and $\frac{1}{4}$ " nyloc nut respectively. The $\frac{1}{4}$ " x $\frac{3}{4}$ " button head bolt will be placed through the front of the license plate, through the bracket, and $\frac{1}{4}$ " washer and nut placed to secure the license plate to the bracket.

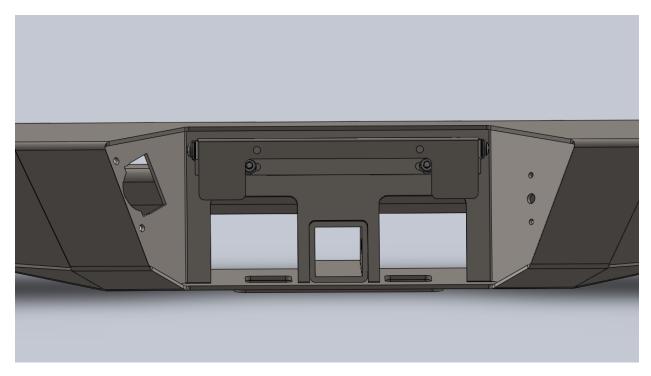


Figure 3. License Plate Flip-Up Bracket mounted to Rear Bumper

Finally mount the license plate bracket to the rear bumper as shown in Figure 3. The slots will locate the two 5/16" nuts welded to the bumper. Attached brackets using the supplied %" flat washer and 5/16" x %" button head bolt. Your rear License Plate Filip-Up Mount is now complete!