
## 2023 DV8 Binding Placement and Fin Specifications

The factory fin settings are 2.520" deep, with a length of 6.840", and 0.745" distance from the tail of the ski using VT tail piece (see diagram). A more accurate and repeatable method for measuring DFT is by removing Versatail and measuring from the Versatail mounting serface to the end of the fin. In this case the DFT is 0.070". A caliper is the best way to check these measurements. Fin tuning instructions, an Allen wrench and warranty information are included with your ski. The binding placement for each size ski is listed below. This is measured from the heel of the front binding to the tail of the ski.

SIZE	BINDING PLACEMENT
65"	28 ¾"
66"	28 1/8"
67"	29 ¾"
68"	29 7⁄8"

The adjustable aluminum foil on your DV8 is mounted by the factory at 7 degrees, upside down, with the two mounting screws above the surface of the wing.

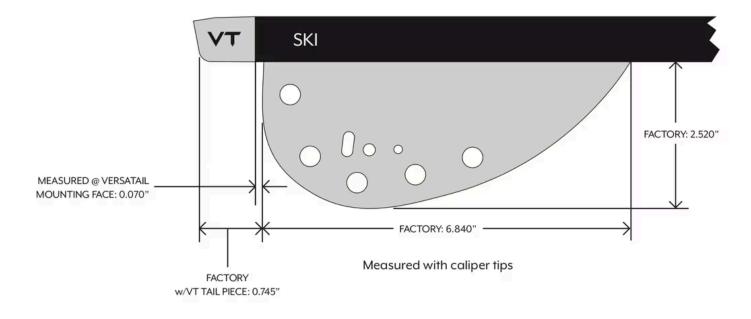

## DV8 Advanced Fin Settings

Water Below  $75^{\circ}F$  = Reduce DFT by 0.005"

WEIGHT	SKI SIZE	BINDINGS	SKIER	LENGTH (TIPS)	DEPTH (FLAT)	DFT (FLAT)	
Up to 130lbs	65"	28 ¾"	Skiers up to 28 off	6.820"	2.510"	0.735"	
Up to 130lbs	65"	28 ¾"	Advanced Option 1	6.803"	2.519"	0.740"	
Up to 130lbs	65"	28 ¾"	Advanced Option 2	6.950"	2.446"	0.761"	
130 - 160lbs	66"	28 7/8"	Skiers up to 28 off	6.830"	2.515"	0.740"	

**DV8** Fin Specifications

24, 10:46			DV8 Fin Specifications					
	WEIGHT	SKI SIZE	BINDINGS	SKIER	LENGTH (TIPS)	DEPTH (FLAT)	DFT (FLAT)	
	130 - 160lbs	66"	28 1/8"	Advanced Option 1	6.813"	2.524"	0.745"	
	130 - 160lbs	66"	28 1/8"	Advanced Option 2	6.960"	2.451"	0.766"	
	160 - 190lbs	67"	29 ¾"	Skiers up to 28 off	6.840"	2.520"	0.745"	
	160 - 190lbs	67"	29 ¾"	Advanced Option 1	6.823"	2.529"	0.750"	
	160 - 190lbs	67"	29 ¾"	Advanced Option 2	6.970"	2.456"	0.771"	
	Over 190lbs	68"	29 1/8"	Skiers up to 28 off	6.850"	2.525"	0.750"	
	Over 190lbs	68"	29 1/8"	Advanced Option 1	6.833"	2.534"	0.755"	
	Over 190lbs	68"	29 1⁄8"	Advanced Option 2	6.980"	2.461"	0.776"	
	JOEL HOWLEY	67"	29 ¾"	36 mph	6.835"	2.533"	0.750"	
	SETH STISHER	66"	29 ¼"	34 mph	6.825"	2.525"	0.725"	: