


166mm

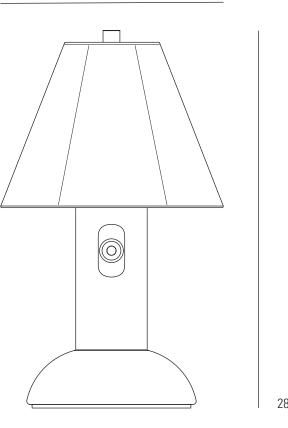

288mm

128mm

Specifications

DUCT CODE:	FT704G, FT704R, FT704PG	CHARGING:	5V1A, 5W; 5V2A, 10W;
IAX WATTAGE:	15W		5V3A, 15W MAX**
IGHT SOURCE:	5.5W INTEGRAL LED MODULE	BATTERY:	LI-ON 4500MAH 3.6V 16.2WH
OLOUR TEMPERATURE:	2700K WARM WHITE	IP RATING:	IP44
COLOUR RENDERING:	CRI 90	MATERIAL(S):	BONE CHINA, ALUMINIUM, STE
DIMMING (3-STEP):	100%, 66%, 33%	AVAILABLE FINISH:	OLIVE GREEN, RUSTY RED, PUTTY GREY
RUN TIME:	7 HR - MAX BRIGHTNESS 20 HR - 33% BRIGHTNESS	CHARGING CABLE:	BLACK NYLON BRAIDED, 1.83M USB-A TO USB-C CABLE
CHARING TIME:	4.5 HR*		

© ORIGINAL BTC Made in the UK



UK CA

*Charger is not included. Charging time is based on using a 10W 5V(DC), 2A charger. **Charging circuit is protected up to 16V (DC), using a charger with higher output will damage the internal electronics beyond repair.