

Clasico

Clasico combines high quality cast iron elegance with a sleek modern design, offering a huge array of possibilities for both traditional and modern styles of décor. Available in either wall mounted or floor standing versions.




Shown here in Gun Metal finish with Chartwell anthracite thermostatic valves.

Material:	D	Operating up to:	6 bar	Delivery:	1 week*	Colours:	char 2	Guarantee:	10 yrs
-----------	---	------------------	-------	-----------	---------	----------	--------	------------	--------


Clasico

Wall mounted

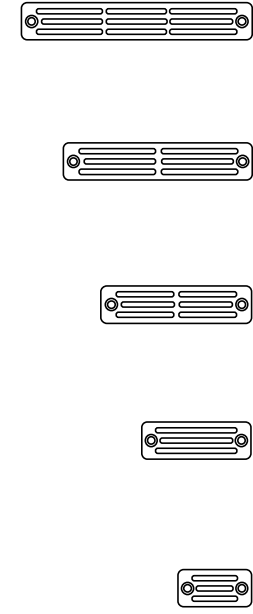

Wall mounted

All information is per section		C33/4-B	C46/4-B	C61/4-B	C80/4-B	C95/4-B
Primer (requires overpainting)						
		£30.80 ex VAT £36.96 inc VAT	£35.40 ex VAT £42.48 inc VAT	£45.00 ex VAT £54.00 inc VAT	£57.60 ex VAT £69.12 inc VAT	£68.00 ex VAT £81.60 inc VAT
Painted finish						
		£46.80 ex VAT £56.16 inc VAT	£51.40 ex VAT £61.68 inc VAT	£61.00 ex VAT £73.20 inc VAT	£73.60 ex VAT £88.32 inc VAT	£84.00 ex VAT £100.80 inc VAT
Hand polished finish						
		£120.80 ex VAT £144.96 inc VAT	£125.40 ex VAT £150.48 inc VAT	£135.00 ex VAT £162.00 inc VAT	£147.60 ex VAT £177.12 inc VAT	£158.00 ex VAT £189.60 inc VAT
Height (mm)		288	420	570	720	870
Height with optional feet (mm)		353	485	636	785	935
Output (watts @ ΔT 50°C)		40.8	58.2	75.4	98.3	116.4
No. columns deep		4	4	4	4	4
Depth (mm) - D1		140	140	140	140	140
Depth (wall to face) (mm) - D2		172 or 182	172 or 182	172 or 182	172 or 182	172 or 182
Pipe centres from wall (mm) - D3		102 or 112	102 or 112	102 or 112	102 or 112	102 or 112
Width (mm)		50	50	50	55	55
Dry weight (kg)		2.58	3.19	4.19	5.17	6.54
Water content (L)		0.40	0.49	0.60	0.85	0.97
Max no. factory built sections		20	20	20	20	17



Joining key

We will always strive to keep on-site assembly to a minimum, but for radiators larger than the maximum factory assembled size (see charts above) on-site assembly will be required.


Full instructions and parts will be supplied, although a joining key tool will need to be purchased separately on a sale/return basis.

Model / Code **Z1700L-01**
 Clasico joining key **£160 ex VAT** **£192 inc VAT**

To calculate the length of the radiator, multiply the number of sections by the section width (see table above) then add 24mm for reducing bushes.
 Please note there is a +/- 2mm manufacturers tolerance per section. We strongly recommend not setting pipework until the radiator has been delivered.


Clasico

Floor standing

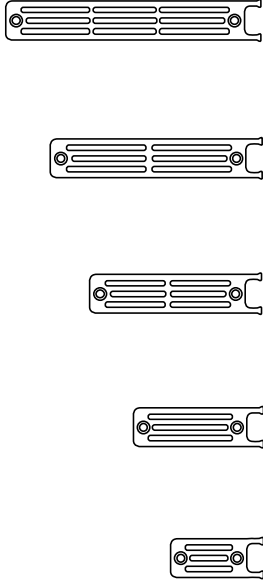

Floor standing – integrated feet

All information is per section		C33/4-F	C46/4-F	C61/4-F	C80/4-F	C95/4-F
Primer (requires overpainting)						
		£30.80 ex VAT £36.96 inc VAT	£35.40 ex VAT £42.78 inc VAT	£45.00 ex VAT £54.00 inc VAT	£57.60 ex VAT £69.12 inc VAT	£68.00 ex VAT £81.60 inc VAT
Painted finish						
		£46.80 ex VAT £56.16 inc VAT	£51.40 ex VAT £61.68 inc VAT	£61.00 ex VAT £73.20 inc VAT	£73.60 ex VAT £88.32 inc VAT	£84.00 ex VAT £100.80 inc VAT
Hand polished finish						
		£120.80 ex VAT £144.96 inc VAT	£125.40 ex VAT £150.48 inc VAT	£135.00 ex VAT £162.00 inc VAT	£147.60 ex VAT £177.12 inc VAT	£158.00 ex VAT £189.60 inc VAT
Height (mm)		353	485	636	785	935
Output (watts @ ΔT 50°C)		40.8	58.2	75.4	98.3	116.4
No. columns deep		4	4	4	4	4
Depth (mm) - D1		140	140	140	140	140
Depth (wall to face) (mm) - D2		172 or 182	172 or 182	172 or 182	172 or 182	172 or 182
Pipe centres from wall (mm) - D3		102 or 112	102 or 112	102 or 112	102 or 112	102 or 112
Width (mm)		50	50	50	55	55
Dry weight (kg)		2.58	3.19	4.19	5.17	6.54
Water content (ltrs)		0.40	0.49	0.60	0.85	0.97
Max no. factory built sections		20	20	20	20	17



Joining key

We will always strive to keep on-site assembly to a minimum, but for radiators larger than the maximum factory assembled size (see charts above) on-site assembly will be required.

Full instructions and parts will be supplied, although a joining key tool will need to be purchased separately on a sale/return basis.

Model / Code **Z1700L-01**
 Clasico joining key **£160 ex VAT** **£192 inc VAT**

To calculate the length of the radiator, multiply the number of sections by the section width (see table above) then add 24mm for reducing bushes.
 Please note there is a +/- 2mm manufacturers tolerance per section. We strongly recommend not setting pipework until the radiator has been delivered.