





### Zehnder

# **Deseo Verso**



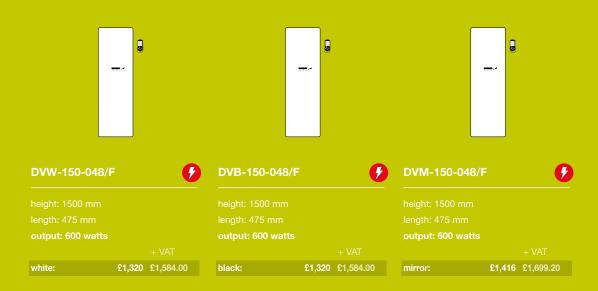

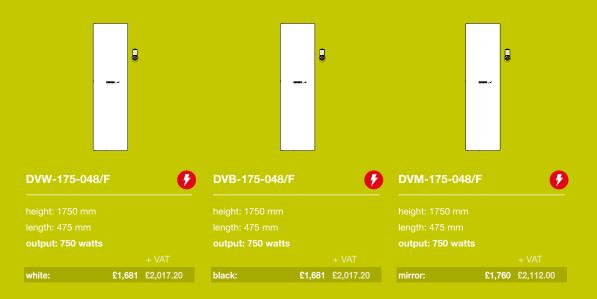

#### It's all in the detail.

- prices inclusive of VAT are shown in greer
- prices highlighted by a tint box indicate stock item
- projection from wall to front face = 105mm
- soft-push retractable bars providing plenty of towel hanging space
- rails can be fitted to extend from either side
- side projection = 310mm
- 1 rail included with 1500mm high versions, 2 rails included with 1750mm high versions
- controlled via intuitive control panel or convenient remote control with infrared technolog
- simple touch controls providing maximum control
- child safety operation lock
- IPX 7 rated




DESEO VERSO CONTROL PANEL




# Zehnder Deseo Verso





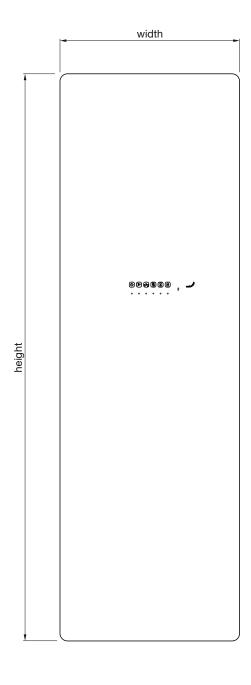

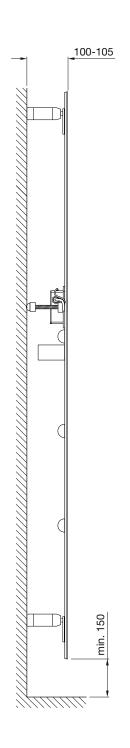

All dimensions shown are in millimetres

Construction: Glass front panel

1.2m long flying lead (2 core) Connections:


Model	<b>Height</b> ± 2mm	Width ± 2mm	Finish	<b>Output</b> Watts	<b>Weight</b> kg
DVW-150-048/F DVW-175-048/F	1500 1750	475 475	white white	600 750	16.0 18.5
DVB-150-048/F DVB-175-048/F	1500 1500 1750	475 475 475	black black	600 750	16.0 18.5
DVM-150-048/F DVM-175-048/F	1500 1750	475 475	mirror mirror	600 750	16.0 18.5
					Issue 1.0







#### **Extendible Towel Rail Detail**


'Disappearing' towel rails can be fitted to extend to either the left or right during installation.

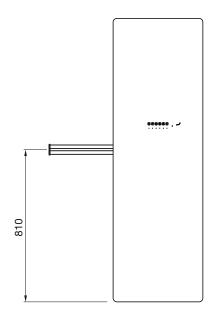

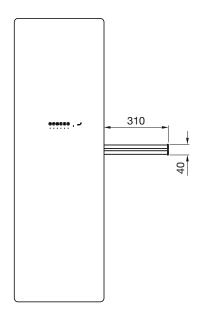

DVW-150 DVB-150 DVM-150

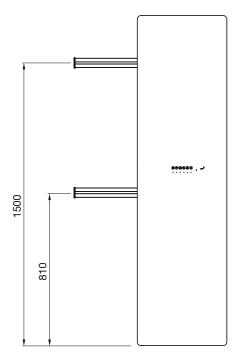

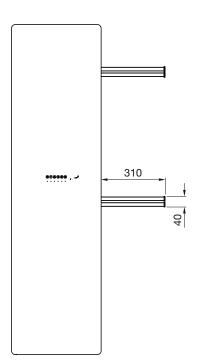


DVW-175 DVB-175 DVM-175





Issue 1.0

## Zehnder Deseo Verso





#### **Tools & Material Required**

Masonry drill bit Screwdriver Electric drill Spirit level Stepladder (for taller radiators)

Key	Component	Qty
Α	Wall Plug	4
В	Bracket	4
С	Screw	4
D	Washer	4
E	Coach Bolt	4
F	Sliding Post	4
G	Grub Screw	4
Н	Allen Key	1
1	Adjustable Spacer	1

#### **Assembly Instructions**

Accurately mark out four bracket holes on wall using spirit level. Drill four holes & insert wall plugs (A).

Attach brackets (B) to wall with screws (C) & washers (D).

Screw coach bolts (E) into sliding posts (F).

Fix sliding posts (F) to mounting plates on rear of radiator. It is recommended to secure the radiator only with the coach screws (E) on the upper mounting plates. Leave the lower coach bolts (E) slightly loose to allow the expansion of the radiator when heating.

Hang radiator by inserting sliding posts (F) into brackets (B).

Tighten grub screws (G) with Allen key (H).

Extend adjustable spacer (I) until it is just touching the wall and lock in place with nut.

Electric radiators should be fitted only by a qualified electrician and must be earthed and connected to a cable outlet in the bathroom in accordance with I.E.E. wiring regulations. The electrical connection should be made to a '5 amp fused fixed spur' located outside the bathroom.

Note: for maintenance purposes, cable outlets must remain accessible and cables must not be buried directly into walls.

