Assembly Instructions


GARDEN SHOWER

EN



Garden Shower

Design:	Broberg & Ridderstråle
Art no:	100256
Colours:	Anthracite, Golden Brown
Materials:	Stainless Steel, Teak
Measurements:	L 850 D 850 H 2155 mm / L 33.5 D 33.5 H 84.4 in
Weight:	47.7 kg / 105.2 lb
Max temperature:	90°C
Pressure:	Min 1.8 - max 10 Bar
Flow:	1500 l/h
Connection:	Garden hose
Installation:	Should be performed by a professional




Color & Sample

Frame available in




Anthracite. Akzo Nobel Noir 2200 Sablé YW360F


Röshults Sample: C0004

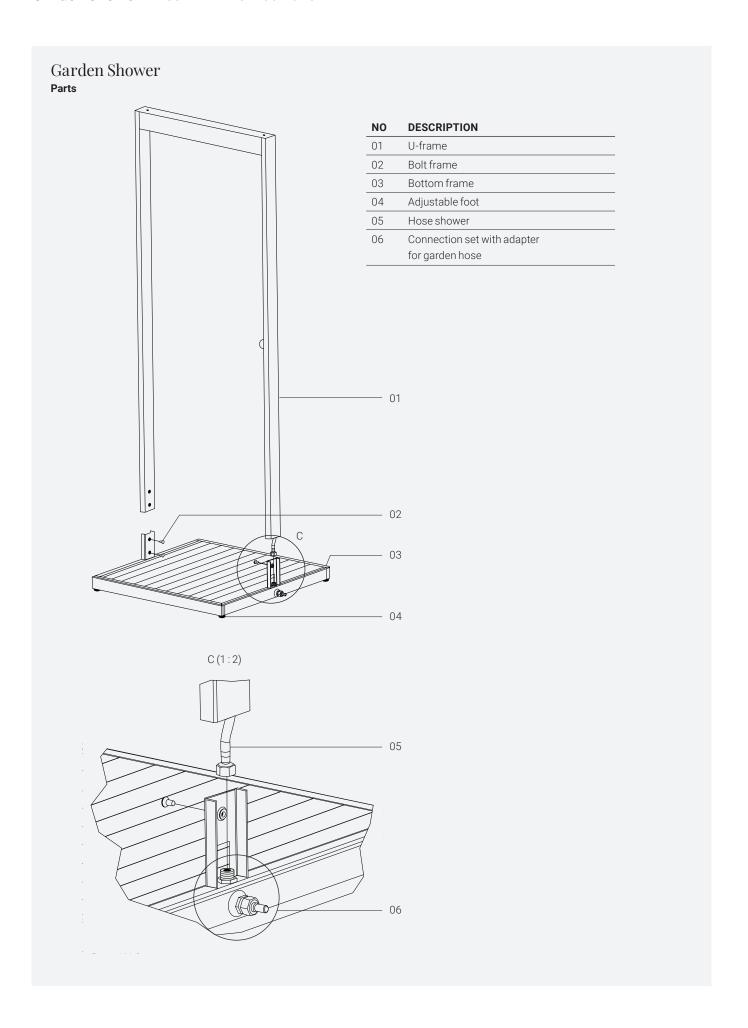



Garden Shower Parts

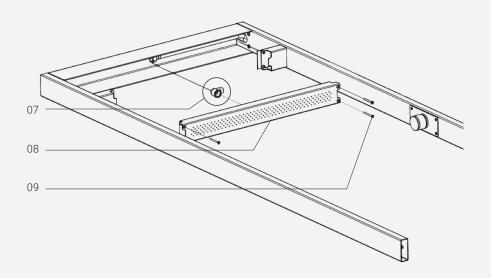



NO	DESCRIPTION
07	Top connection 90 ° 1/2" (inside)
08	Shower head
09	Screw M5x50 stainless steel Din 7991
10	Screw M4x12 stainless steel Din 7991
11	Shower-plate
12	Knoheet shower

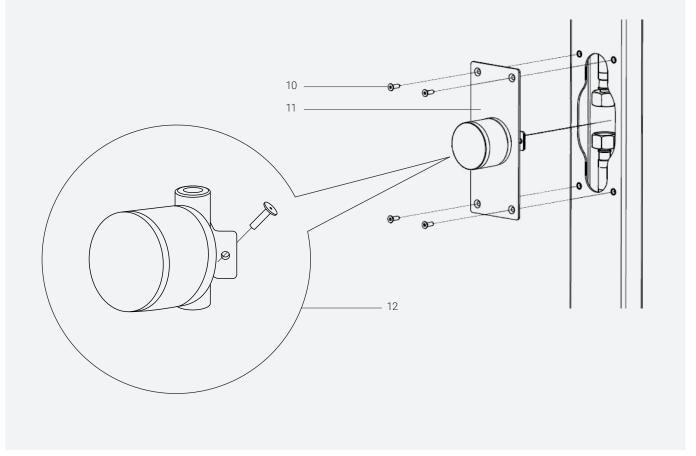


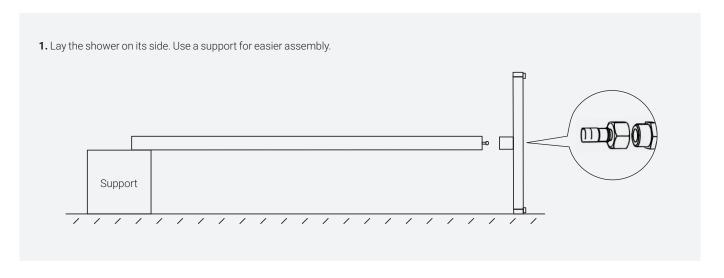

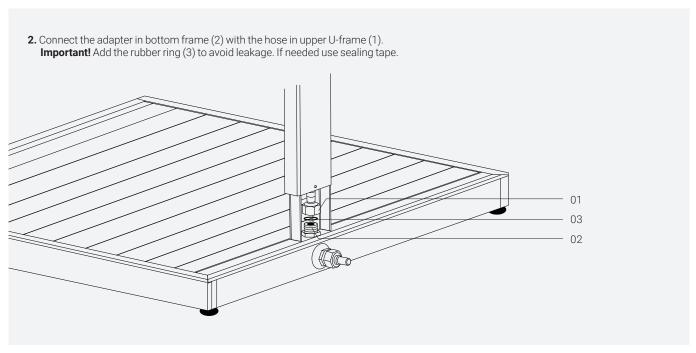

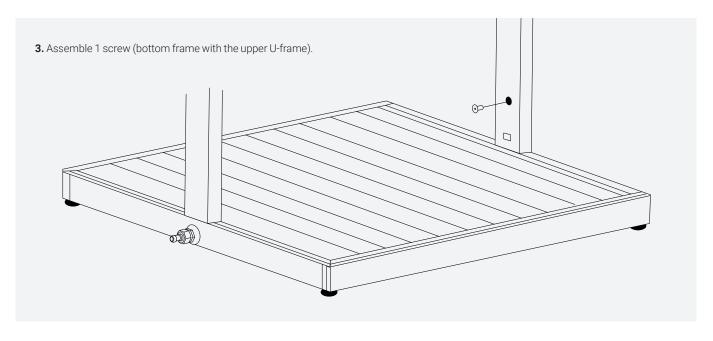

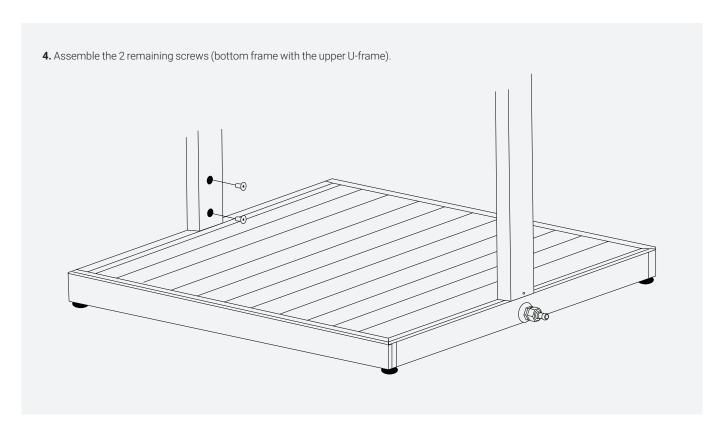

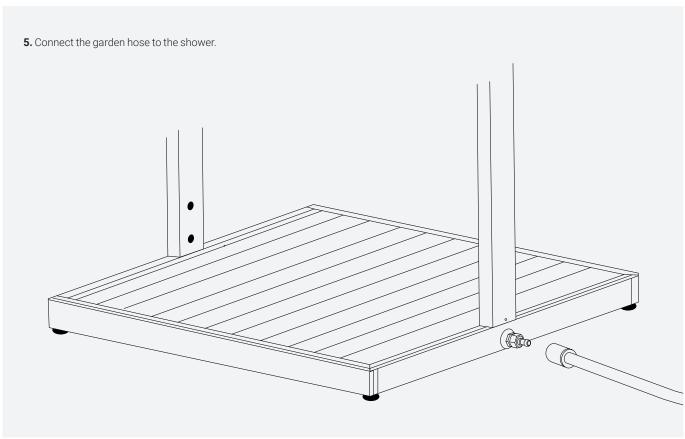

6. You can now start using your Garden Shower.

$\boldsymbol{\triangle}$ If the customer wishes to be able to regulate the water temperature.

To get water at a given temperature, an outdoor tap (withstanding winter conditions) shall be installed in the proximity of the shower. The outdoor tap can be purchased at a suitable specialty store.


A garden hose can be connected to the outdoor tap and the garden shower.

The water flow can be opened, adjusted or closed from the shower.

⚠ Warning!

Always follow the instructions attached to the outdoor tap.

Example of outdoor tap:

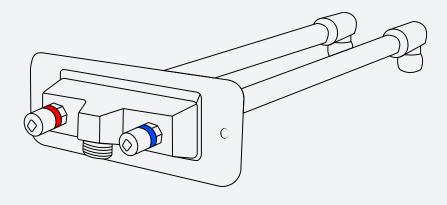

Example of outdoor tap with quick release adapter installed:

