

APPLICATION:

JOB NAME:

PRODUCT NAME:


ADD-ON FAUCET WITH SWING SPOUT

_____ SPECIAL CONFIGURATION
CHECK BASE MODEL AND OPTIONS

QUANTITY:

ITEM NO.

- MODEL:
- 2901 WITH 6" SWING SPOUT
 - 2901-8 WITH 8" SWING SPOUT
 - 2901-10 WITH 10" SWING SPOUT
 - 2901-12 WITH 12" SWING SPOUT
 - 2901-14 WITH 14" SWING SPOUT
 - 2901-16 WITH 16" SWING SPOUT

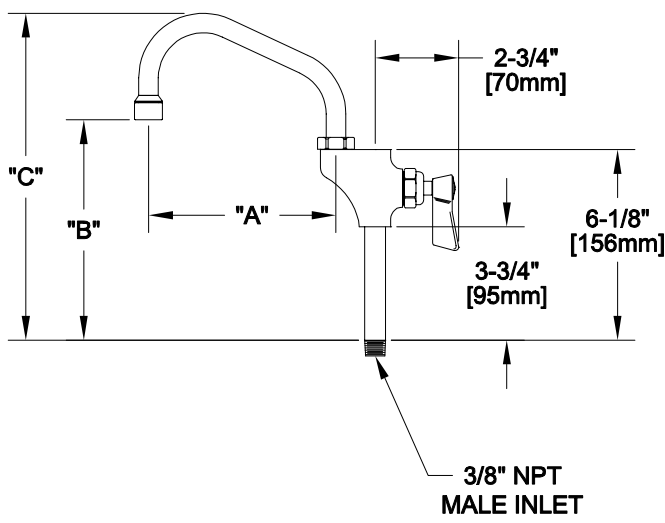

- OPTIONS OR MODIFICATIONS:
- HANDLES (CROSS OR WRIST) CIRCLE STYLE
 - VANDAL RESISTANT KIT
 - OTHER _____

FEATURES

- CONTROL VALVE**
- * 3/8" MALE INLET
 - * STEM - RIGHT HAND
 - * HOT AND COLD INDEX BUTTONS
 - * SWIVELLING SEAT DISK
 - * STAINLESS STEEL SEAT
 - * STAINLESS STEEL SEAT SCREW
 - * STAINLESS STEEL HANDLE SCREW

- SYSTEM LIMITS**
- * TEMP: 40°F MIN. TO 140°F MAX.
 - * PRESSURE: 200 PSI MAX. STATIC
 - * 2.20 GPM AT 80 PSI

- SHIPPING WEIGHT**
- * 2.5 LBS

MODEL	DIM "A"	DIM "B"	DIM "C"
2901	6" [152mm]	7-1/8" [181mm]	10-3/4" [273mm]
2901-8	8" [204mm]	8" [204mm]	11-5/8" [296mm]
2901-10	10" [254mm]	7-1/2" [191mm]	11" [280mm]
2901-12	12" [305mm]	8-3/4" [222mm]	12-3/8" [314mm]
2901-14	14" [356mm]	9-3/8" [239mm]	13" [330mm]
2901-16	16" [406mm]	10" [255mm]	13-5/8" [347mm]