


APPLICATION:

JOB NAME:

QUANTITY: ITEM NO.:

PRODUCT NAME:
PRE-RINSE SPRAY VALVE HOSE

- MODEL:
- 12114 PRE-RINSE SPRAY VALVE HOSE 12"
 - 2916-151/2 PRE-RINSE SPRAY VALVE HOSE 15"
 - 12122 PRE-RINSE SPRAY VALVE HOSE 18"
 - 12130 PRE-RINSE SPRAY VALVE HOSE 21"
 - 2916-251/2 PRE-RINSE SPRAY VALVE HOSE 25"
 - 12149 PRE-RINSE SPRAY VALVE HOSE 27"
 - 12157 PRE-RINSE SPRAY VALVE HOSE 30"
 - 2914 PRE-RINSE SPRAY VALVE HOSE 36"
 - 12165 PRE-RINSE SPRAY VALVE HOSE 42"
 - 12173 PRE-RINSE SPRAY VALVE HOSE 48"
 - 12181 PRE-RINSE SPRAY VALVE HOSE 54"
 - 2915 PRE-RINSE SPRAY VALVE HOSE 60"
 - 12203 PRE-RINSE SPRAY VALVE HOSE 72"
 - 12211 PRE-RINSE SPRAY VALVE HOSE 84"
 - 12238 PRE-RINSE SPRAY VALVE HOSE 96"
 - 12246 PRE-RINSE SPRAY VALVE HOSE 108"
 - 12254 PRE-RINSE SPRAY VALVE HOSE 120"
 - 12262 PRE-RINSE SPRAY VALVE HOSE 132"
 - 12270 PRE-RINSE SPRAY VALVE HOSE 144"

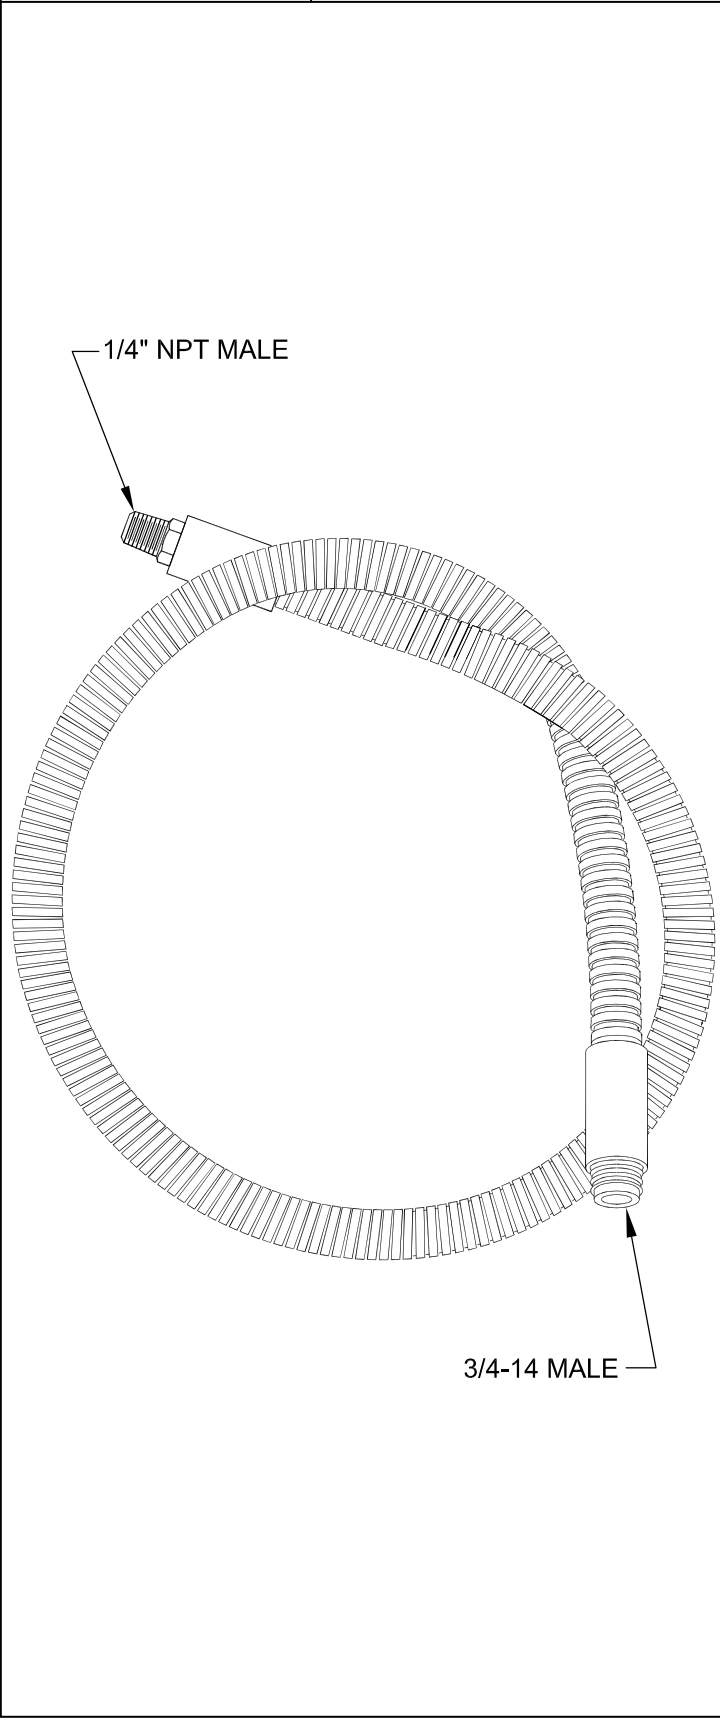

OPTIONS OR MODIFICATIONS:

OTHER _____

FEATURES

HOSE

- * STAINLESS STEEL END FITTINGS
- * STAINLESS STEEL EXTERNAL JACKET
- * 3-PLY FIBER REINFORCED INTERNAL RUBBER

HOSE

- * REPAIRABLE IN-FIELD WITH SIMPLE TOOLS

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 160°F MAX.
- * PRESSURE: 200 PSI MAX. STATIC

PRODUCT COMPLIANCE:

- * ASME A112.18.1 / CSA B125.1
- * NSF 61 - Section 9
- * NSF 372 (Low Lead Content)



FISHER MANUFACTURING COMPANY
TOLL FREE: 800-421-6162 - FAX: 800-832-8238
information@fisher-mfg.com - www.fisher-mfg.com