

## Starline CD150+HRU

180 rack per hour Conveyor Dishwasher  
**W 2100mm x D 765mm x H 1835mm**

The CD150 is designed to efficiently optimise washroom performance, now with increased dishwashing capacity of 180 racks per hour and reduced water consumption of 240 litres per hour, alongside a broad range of customisable system accessories.

Since 1981 Washtech dishwashers have been constructed in New Zealand from heavy-duty stainless steel, and are engineered specifically for the unique local conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your CD150 will not let you down.

### Special Features:

- Integrated heat recovery unit which significantly reduces steam emissions, energy consumption and water treatment cost
- SEED certified for installation without an extraction canopy in most situations

### Standard Features:

- Capacity of up to **180 racks per hour** (3,240 plate equivalents)
- Water consumption of just **240 litres per hour**
- Heavy-duty stainless steel construction and wash manifold
- Full width, easily removable stainless steel wash filter trays for easy cleaning
- Removable upper and lower heavy duty stainless steel wash arm cassettes
- Powerful drive with safety clutch allows the machine to wash heavy items with ease
- Autostart minimises operating costs by only activating pumps and drive when a rack is present
- Rinse economiser only draws fresh water when racks are in the rinse zone
- 600mm pre-wash module
- 1200mm wash module including final rinse
- Easily maintained electromechanical controls
- Will wash items up to 400mm high, and taller with suitable operator procedures
- In-house CAD design service for every site layout

### Includes:

- 2 x 500mm dish rack (600 70028)
- 2 x 500mm cup rack (600 70029)
- 2 x cutlery container (C660503)
- 1 x cutlery basket (C660508)

### Optional Accessories Include:

- Dryer modules
- Straight and curved roller tables
- Pre-rinse troughs
- Setdown benches
- Custom scrap/sort stations
- Sideload tables
- Inlet and outlet corner pawl drives
- Heavy duty roller table limit switch



## Starline CD150

+HRU

washtech.co.nz

Washtech Limited

PO Box 90-548  
Auckland 1142

414 Rosebank Road  
Avondale  
Auckland 1026  
NEW ZEALAND

(09) 829 0930  
info@washtech.co.nz





service@washtech.co.nz

For 24/7 service and support:  
**0800 WASHTECH**

Washtech provides full service and support 24 hours a day, 7 days a week, with a comprehensive nationwide network of authorised service providers.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© 2020 Washtech Limited  
Version: SCD150XXXX 2005

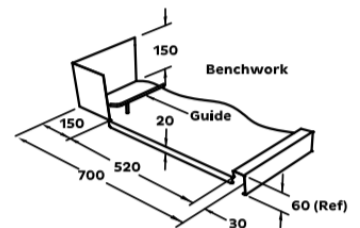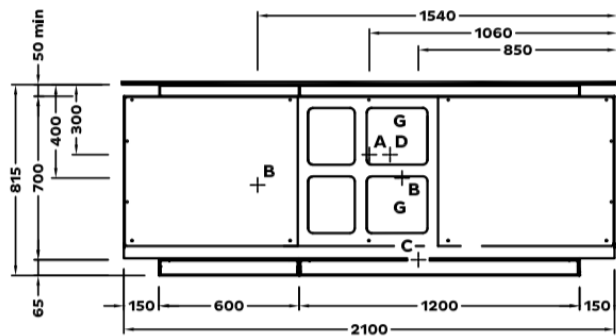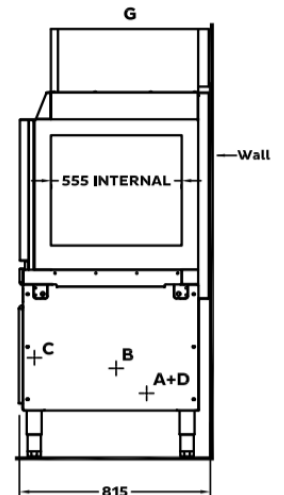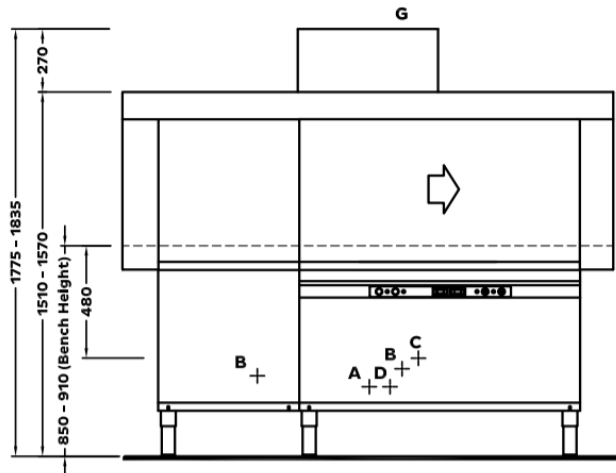

### A – Hot Water and D – Cold Water \*

Hot Temp 65°C  
Cold Temp <25°C  
Connections 3/4" male  
Pressure 200-350kPa  
Flow 20 litres per min  
Quality Potable - refer table  
Backflow Prevention DCV  
Consumption 240 litres per hour \*\*

### B – Waste

Connection 1.5" BSP male  
Line 2.0" / 50mm minimum

C – Electrical	V	Hz	A/phase	Max kW
Three Phase	415	50	35	22.20

### G – Air Outlet

No direct connection permitted.  
Certified for installation without extraction subject to min, background ventilation of 1.1m<sup>2</sup> free area opening or 350L/sec mechanical ventilation or air change.  
Consult with a ventilation engineer.

Isolating switch must be within 1m of, and not directly behind the machine.

### Dimensions

	Machine	Packed
Width (mm)	2100	2300
Depth (mm)	765	950
Height (mm)	1835	1850
Weight (kg)	355	440
Volume (m <sup>3</sup> )		4.04

### Water Quality

	Min	Max
pH	7	8
Hardness (ppm)	20	100
Cl <sup>-</sup>		100
SO <sub>4</sub>		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl <sub>2</sub>		0.1

\* Machine fill uses hot water only, operation requires hot and cold water inlets.

\*\* Water consumption rates may vary based on site conditions.

Refer to operator manual for installation instructions.