

XP

Signature Passthrough Dishwasher – 500mm Rack W 705mm x D 720mm x H 1525mm

The XP utilises Starline electromechanical controls making it a reliable option for most businesses requiring a simple to use, easy to service passthrough dishwasher that provides great wash results, year-after-year.

The XP is the simplest to use and easiest to maintain passthrough dishwasher in the Starline range. Equipped with more wash power than many machines in its class, it is ideal for tougher environments and remote locations.

Starline dishwashers have been made in New Zealand since 1981 and are engineered specifically for our unique local conditions and regulations. The renowned reliability of the machines is also backed by the most extensive service network and spare parts inventory in the country, ensuring that your Starline will not let you down.

Standard Features

- Autostart on door closure 1, 2 and 3 minute cycles
- Washes up to 1,080 plates per hour
- Easy installation supplied complete with:
 - Water supply hose
 - Dual detergent and rinse aid pumps with injector lines
 - 15 amp plugset (or easy 25Amp or 3P/15Amp connection for rapid recovery between cycles)
 - No commissioning required
- Reliable results through upper and lower wash/rinsearms with precision moulded jets
- Easily serviced electromechanical controls
- Durable stainless steel construction
- Low hot water consumption of 2.6 litres per cycle




Includes:

- 1x 600 70028 - 500mm dish rack
- 1x 600 70029 - 500mm cup rack
- 1x C660503 - cutlery container



XP

Signature Passthrough Dishwasher – 500mm Rack
W 705mm x D 720mm x H 1525mm

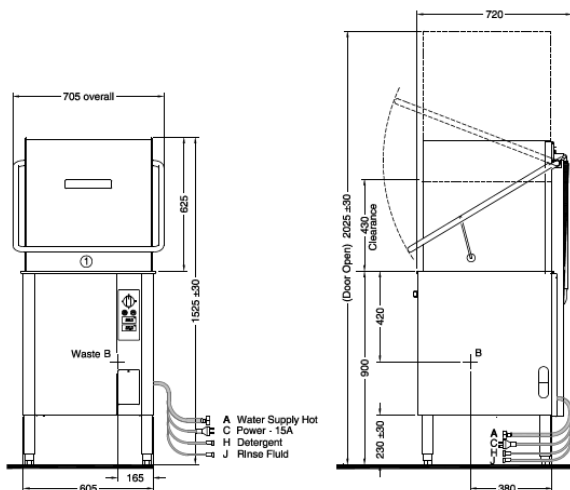

- In-line Installation**
 ① Bench gap 595
Corner Installation
 ② wall to front inside corner of wash tank 700
 ③ machine must face left for access to controls
 ④ allow 300 clearance beneath bench to front for service access
 ⑤ splashback return no higher than 150
 ⑥ left side is mirror image

A Cold water

Temperature 65°C
 Connection 3/4" male; hose supplied
 Pressure 200-350kPa
 Flow 20 litres per min
 Quality Potable & soft
 Backflow Prevention Atmospheric Vacuum Breaker
 Consumption 2.6 litres per cycle

B Waste

Connection 1.5" BSP
 Line 2" BSP

C Electrical

Single phase 230V 50Hz 15Amp (plugset supplied)
 Single phase 230V 50Hz 25Amp
 Three phase 400V 50Hz 15Amp per phase

Nominal Power Consumption

1P / 15A = 2.5kW rinse / 2.5kW wash / 3.25kW max
 1P / 25A = 5.0kW rinse / 2.5kW wash / 5.75kW max
 3P / 15A = 5.0kW rinse / 2.5kW wash / 7.50kW max

Dimensions

Width 705mm
 Depth 720mm
 Height 1525mm
 Weight 94kg

Packed Dimensions

Width 760mm
 Depth 830mm
 Height 1450mm
 Weight 142kg
 Cubicmetres 0.91m³

Water Quality Requirements

Hardness	ppm	pH
Min	20	7
Max	100	8

Ions	Cl ⁻	SO ₄	Fe	Mn	Cu	CL ₂
Max mg/l	100	400	0.1	0.5	0.05	0.1

Refer operator manual for installation instructions



ISO9001

All Starline products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

WASHTECH LTD
 PO Box 90-548
 Auckland 1142
 414 Rosebank Road
 Avondale
 Auckland 1026
 New Zealand
 Phone 09 829 0930
 info@washtech.co.nz
 www.starline.co.nz



On call service where you are. Washtech provides full service backup, 24 hours a day, 7 days a week with factory based technicians and a comprehensive nationwide network of independent service providers. STARLINE SERVICE 09 829 0923 © Copyright Washtech 2016

an Ali Group Company



The Spirit of Excellence