

XU

Signature Undercounter Dishwasher / Glasswasher – 500mm Rack W 575mm x D 600mm x H 845mm

Starline's XU represents the next stage of 35 years of local evolution, featuring ever reliable electromechanical controls and 500mm racks. The XU has been reengineered as a sharper looking machine with a new composite filtration system for easy cleaning. With the addition of digital wash and rinse temperature displays it is now easier than ever to accurately record information for HACCP food safety reporting.

Starline's XU is a simple to use and easy to maintain undercounter dishwasher/ glasswasher perfect for everything from Cafes and Bars to Kindergartens and Corporate Offices.

Starline dishwashers have been made in New Zealand since 1981 and are engineered specifically for our unique local conditions and regulations. The renowned reliability of the machines is also backed by the most extensive service network and spare parts inventory in the country, ensuring that your Starline will not let you down.

Standard Features

- Quikstart 1 and 2 minute glasswashing and dishwashing cycles
- Washes up to 1,080 plates / 1,500 glasses per hour
- QuikConnect Installation with everything you need including:
 - Water supply hose
 - Dual detergent and rinse aid pumps with injector lines
 - Drain pump outlet hose
 - 15 amp plugset
 - No commissioning required
- Reliable results through upper and lower wash/rinsearms with precision moulded jets
- Easily serviced electromechanical controls
- Durable stainless steel construction
- Comprehensive 12 month Starline warranty
- Low hot water consumption of 2.6 litres per cycle


Includes:

- 1 x 600 70028 - 500mm dish rack
- 1 x 600 70029 - 500mm cup rack
- 1 x C660503 - cutlery container



XU

Signature Undercounter Dishwasher / Glasswasher – 500mm Rack
W 575mm x D 600mm x H 840mm

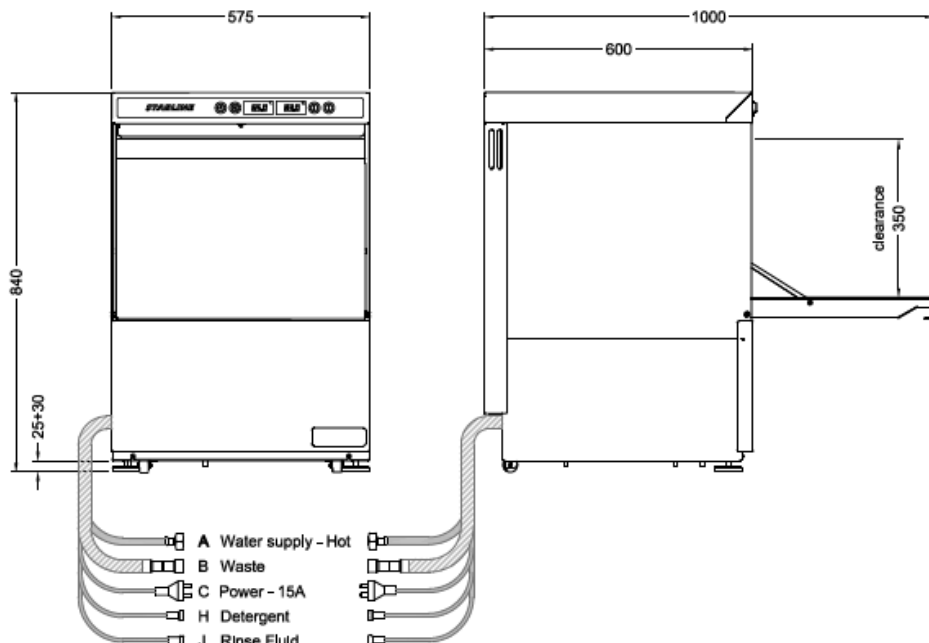

ISO9001

All Starline products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

A Hot water	Temperature	65°C
	Connection	3/4" male; hose supplied
	Pressure	200–350kPa
	Flow	20 litres per min
	Quality	Potable & soft
	Backflow Prevention	Atmospheric Vacuum Breaker
	Consumption	2.6 litres per cycle
B Waste	Connection	Hose supplied for 38mm open standpipe 750 high or connection to sink trap
C Electrical	Single phase	230V 50Hz 15Amp (plugset supplied)

Nominal Power Consumption

1P / 15A = 3.0kW rinse / 2.5kW wash / 3.37kW max

Dimensions

Width	575mm
Depth	600mm
Height	840mm
Weight	60kg

Packed Dimensions

Width	720mm
Depth	690mm
Height	970mm
Weight	77kg
Cubicmetres	0.48m ³

Water Quality Requirements

Hardness	ppm	pH
Min	20	7
Max	100	8

Ions	Cl ⁻	SO ₄	Fe	Mn	Cu	Cl ₂
Max mg/l	100	400	0.1	0.5	0.05	0.1

Refer operator manual for installation instructions

WASHTECH LTD
PO Box 90-548
Auckland 1142
414 Rosebank Road
Avondale
Auckland 1026
New Zealand
Phone 09 829 0930
info@washtech.co.nz
www.starline.co.nz



On call service where you are. Washtech provides full service backup, 24 hours a day, 7 days a week with factory based technicians and a comprehensive nationwide network of independent service providers. STARLINE SERVICE 09 829 0923 © Copyright Washtech 2016

an Ali Group Company



The Spirit of Excellence