

43" Full HD LED Commercial Display

Convenience and Control for Hospitality Environments

CDE4302



Versatility and good looks go hand-in-hand in a display destined to shine in any hospitality, business, or retail environment. Loaded with control, management and connectivity features, the ViewSonic® CDE4302 43" commercial LED display makes it easy to deploy and maintain multiple screens throughout your establishment. From in-room entertainment to eye-catching digital signage to stunning sports coverage, guests will enjoy vibrant multimedia content – while you enjoy the convenience of customizable, automated multiscreen control. Plus, with a sleek finish, slim bezel and optional glass stand, it's sure to add appeal to any décor.

Key Features:

Integrated USB multimedia player

Free-bundled vController[™] software

Hospitality mode for automated multi-screen control

Control multiple devices with HDMI® CEC and IR pass-through

Enhanced viewing comfort

Designed for:

Hospitality


Business

Retail



43" Full HD LED Commercial Display

CDE4302

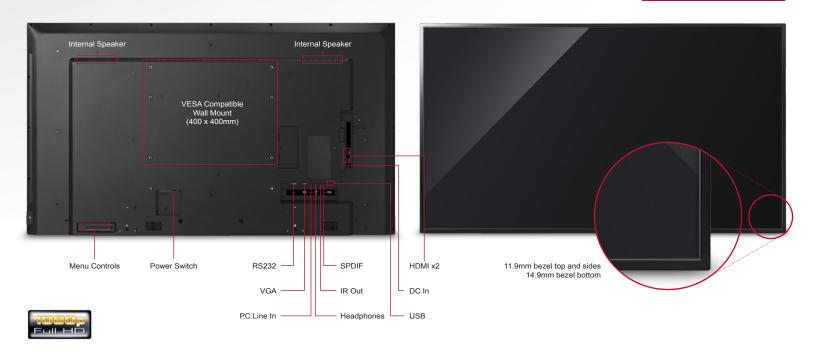

Specifications

PANEL	Type Display Area Optimum Resolution Contrast Ratio Viewing Angles Response Time Light Source Brightness Aspect Ratio Panel Surface	VA TFT LCD Module with LED Backlight 37.0" horizontal x 20.8" vertical; 43" diagonal 1920x1080 3000:1 (typ) 178° horizontal, 178° vertical 6.5ms Long life, 30,000 hrs. (typ) 350 cd/m² 16:9 Anti-glare, hard coating 3H	
INPUT	Video Input Control Input	HDMI, VGA RS232, IR In	
AUDIO OUTPUT	Speakers	Internal 10-watt (x2)	
INPUT SIGNAL	TV/Video Comp	480i, 480p, 720p, 1080i, 1080p	
CONNECTOR	Analog Digital Power	HDMI (x2), SPDIF, USB, RS232	
CONTROLS	Panel Picture Sound Clock Features USB Menu	Power, Mute, Input, Vol +, Vol -, Up, Down, Menu Auto picture, Brightness, Contrast, Color, Advanced settings, Reset picture setting Auto sound, Equalizer, Balance, Reset sound settings Sleep timer, Date/Time Language, PC settings, Button lock, Remote lock, Monitor ID, Current software info, Reset AV & features Photo, Music, Movie	

POWER	Voltage Consumption	AC 100–240V (universal), 50 / 60Hz 105W (typ), 125W (max)
OPERATING CONDITIONS	Temperature Humidity	32-104°F (0–40°C) 20-80% (non-condensing)
DIMENSIONS (W x H x D)	Physical Packaging	38.1 x 22.0 x 2.4 in. / 968.2 x 559.4 x 60 mm 42.1 x 27.4 x 6.3 in. / 1070 x 696 x 159 mm
BEZEL DIMENSIONS	Top/Left Bottom / Right	11.9 mm / 11.9 mm 14.9 mm / 11.9 mm
WEIGHT	Net Gross	19.2 lbs / 8.7 kg 26.9 lbs / 12.2 kg
WALL MOUNT	VESA Compatible	400 x 400 mm / 200 x 200 mm
REGULATIONS		CE, CB, ErP, WEEE, C-tick, cTUVus, FCC, ENERGY STAR, Mexico Energy
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WARRANTY		Three-year limited warranty on parts and labor

Optional Accessories

VESA Compatible Wall Mount	WMK-013
Stand for CDE4302	STND-034

What's in the box?

CDE4302 display, power cable, VGA cable, RS232 cable, remote control with batteries, ViewSonic Wizard CD (User Guide), Quick Start Guide





