

Key Features



10-point Multi-touch | Built-in Quad Core Media Player with
16GB Storage | Embedded LAN, Wi-Fi, and Browser | Internal
Scheduler | Content Management Software



Product Description

Content deployment, interactivity, and messaging couldn't be easier than with the ViewSonic® CDM5500T. Featuring a 10-point touchscreen and internal media player, this commercial display gives you everything you need for easy interactive digital signage – right out of the box. Loaded with a powerful, high-performance processor and 16GB of storage (upgradeable to 32GB), the built-in media player ensures hours upon hours of smooth, high-definition multimedia content delivery. The CDM5500T also features built-in LAN / WiFi for easy connection to the internet for content delivery. Additional commercial features include an internal scheduler, tiling for video wall applications, and commercial construction for reliable messaging 24 hours a day, 7 days a week.

For more detailed information on how ViewSonic ViewBoards can best be utilized in a school environment, see our [ViewBoard FAQs](#).

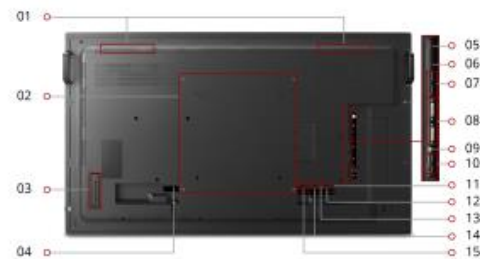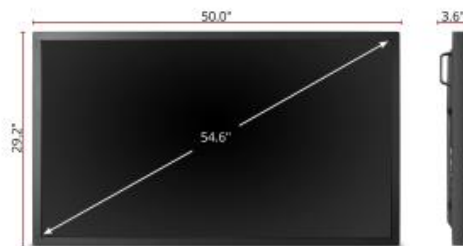

- | | | | | |
|---|-----------------------|------------------------------------|------------------|-------------|
| 1. Internal Speakers | 4. AC In | 8. DVI-I In/Out | 11. Audio Out | 15. HDMI x2 |
| 2. VESA™ Compatible Wall Mount 400 x 400 mm | 5. SD Reader | 9. Audio In | 12. RS232 In/Out | |
| 3. Menu Controls | 6. Micro USB | 10. USB 2.0 (Type A x2, Type B x1) | 13. LAN | |
| | 7. DisplayPort In/Out | | 14. IR In/Out | |



55"
DISPLAY



1920 x 1080
RESOLUTION



450 cd/m2
BRIGHTNESS

24/7

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Display Size (in.):	55
Viewable Area (in.):	54.6
Orientation:	Landscape / Portrait
Light Source:	ELED
Resolution:	1920 x 1080
Aspect Ratio:	16:9
Static Contrast Ratio:	1,100:1
Backlight Life (Hours):	50,000
Brightness:	450 cd/m2
Response Time (Typical GTG):	12ms
Viewing Angles:	178° horizontal, 178° vertical
Panel Surface:	3H Anti-glare, hard-coating
Operation Rating:	24/7

Embedded Player:

CPU:	Quad core A9 CPU - RK3188
Interface:	OSD / Remote Control

Audio:

Internal Speakers:	10W (x2)
--------------------	----------

Connector:

HDMI 1.4(2), DVI-I(1), DVI-I Out(1), Display Port(1), Display Port Out(1), 3.5mm Audio In(1), 3.5mm Audio Out(1), Speaker Out(2), USB 2.0(2), RS232 Out(1), Ethernet LAN (RJ45)(1)

Power:

Voltage:	100-240 VAC
Consumption (max):	130W
Consumption (typical):	75W
Stand-by:	<.5W

Controls:

On Screen Display:	Input, Volume, Backlight, Audio, Screen, Display, Adjust
Remote Control:	Volume, Channel, Source, Mute, Back, Input, Menu

Operating Conditions:

Temperature:	41-104° F (5 - 40° C)
Humidity (non-condensing):	10-90%

Touch:

Touch Technology:	Infrared
Touch Points:	10-Point Touch

Weight (metric):

Net (kg):	35.1
Net Without Stand (kg):	31
Gross (kg):	39.6

Weight (imperial):

Net (lbs):	77.3
Net Without Stand (lbs):	68.3
Gross (lbs):	87.3

Dimensions (metric) (WxHxD):

Packaging (mm):	1448 x 952 x 223
Physical (mm):	1271 x 809 x 400

Dimensions (imperial) (WxHxD):

Packaging (in.):	54.0 x 37.4 x 8.7
Physical (in.):	50 x 29.2 x 3.6

Mount:

VESA Compatible:	400 x 400 mm
------------------	--------------

General:

Warranty: Three-year limited warranty on parts, labor and backlight
 Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

PACKAGE CONTENTS: CDM5500T, Remote control, User Manual, Quick Start Guide, power cables, RS232 cable, IR sensor cable, RS232 daisy chain cable

Regulations: UL/cUL, FCC, Energy Star 7.0, UL-MX-CoC, Mexico Energy

UPC: 766907898316

Accessories:

CD-EW-55-01, CD-EW-55-02, LB-STND-005-3, NMP012, NMP250-WL, NMP250-WU, NMP620-P10, NMP620-P10X, STND-044, STND-052, SW-071, SW-072, SW-073, SW-074, SW-090, SW-091, SW-092, SW-093, SW-094, SW-095, SW-096, VC10, VCB10, WMK-051, WMK-054, sw-014, sw-015

Awards: