

# 22" (21.5" viewable) Full HD Multimedia LED Monitor

Great Value and Performance with Flexible Connectivity

**VA2261-2**



Enjoy value, performance, and eco-friendly low TCO with the ViewSonic® VA2261-2 22" (21.5" viewable) Full HD 1080p monitor. Offering best-in-class performance for the price, this versatile display delivers crisp text and vibrant images with Full HD 1920x1080 resolution. Flexible DVI and VGA connectivity make this monitor perfect for a wide range of applications including simple web browsing, multimedia entertainment, and office work. In addition, Flicker-Free technology and a Blue Light Filter help to eliminate eye strain from extended viewing periods for improved productivity and viewing comfort. Featuring a hairline surface finish, this monitor looks great on any desktop, while a VESA-compatible mount enables flexible installation in office and home settings.

#### **Key Features:**


- Full HD 1080p resolution
- Versatile connectivity
- Enhanced viewing comfort
- Superior color rendering and intuitive settings
- Energy-saving Eco-mode

#### **Designed for:**

- Business
- Home

# 22" (21.5" viewable) Full HD Multimedia LED Monitor

**VA2261-2**

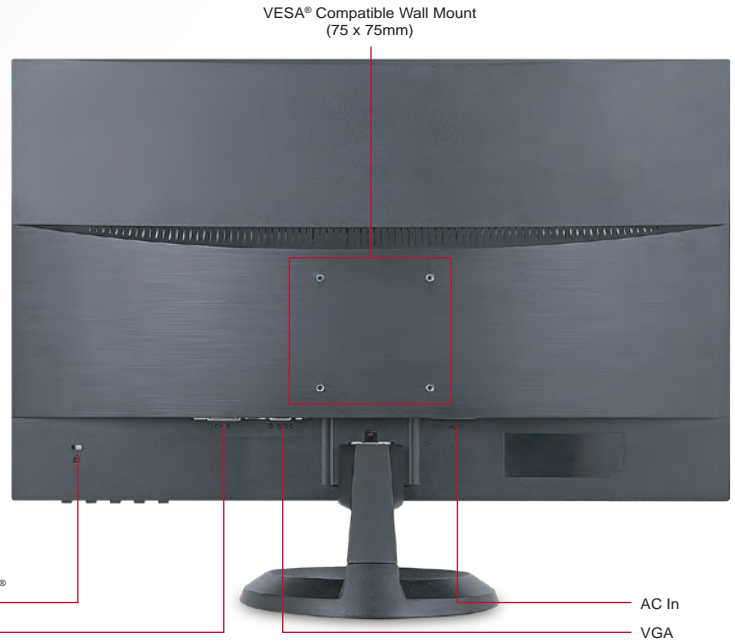

## Specifications

<b>LCD PANEL</b>	Type	Color a-Si TFT Active Matrix LCD
	Display Area	18.8" horizontal x 10.6" vertical; 21.5" diagonal
	Optimum Resolution	1920x1080
	Brightness	200 cd/m <sup>2</sup> (typ.)
	Contrast Ratio	600:1 (typ.)
	Viewing Angles	90° horizontal, 65° vertical
	Colors	16.7M (6bit + Hi-FRC)
	Response Time	5ms (Tr+Tf)
	Backlight	White-light LED
	Backlight Life	20,000 hours (min.)
	Panel Surface	Anti-glare, hard-coating (3H)
<b>VIDEO INPUT</b>	Digital	VGA, DVI-D
	Frequency	Fh: 24–82kHz, Fv: 50–75Hz
	Sync	Separate Sync, TMDS
<b>COMPATIBILITY</b>	PC	Up to 1920x1080 non-interlaced
	Mac®	Up to 1920x1080
<b>CONNECTOR</b>	Video In	VGA, DVI-D
	Power	3-pin plug (CEE22)
<b>CONTROLS</b>	Front Panel Buttons	Auto, Left, Right, Menu, Power
	OSD	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

<b>ERGONOMICS</b>	Tilt	Forward 6° / Back 21°
<b>POWER</b>	Voltage	AC 100–240V (universal), 50 / 60Hz
	Consumption	21.5W (typ.) / 24W (max.)
	Optimize	14.5W (typ.)
	Conserve	12.5W (typ.)
<b>OPERATING CONDITIONS</b>	Temperature	32–104° F (0–40° C)
	Humidity	20–90% (non-condensing)
<b>DIMENSIONS (W x H x D)</b>	Physical with Stand	19.8 x 15.0 x 7.1 in. / 504 x 380.8 x 179.6 mm
	Physical without Stand	19.8 x 12.2 x 1.9 in. / 504 x 310.5 x 47.5 mm
	Packaging	22.4 x 15.4 x 4.5 in. / 570 x 390 x 115 mm
<b>WEIGHT</b>	Net with Stand	5.8 lb. / 2.6 kg
	Net without Stand	4.8 lb. / 2.2 kg
	Gross	7.9 lb. / 3.6 kg
<b>WALL MOUNT</b>	VESA compatible	75 x 75 mm
<b>REGULATIONS</b>		WEEE, RoHS, REACH SVHC List, cTUVus, FCC/IC, TUV-MX-CoC, MX-Energy, CCC, CEL Level 1
<b>RECYCLE/DISPOSAL</b>		Please dispose of in accordance with local, state, or federal laws

## What's in the box?

VA2261-2 monitor, Power cable, VGA cable, Quick Start Guide



ViewSonic Corporation's OMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.