


## Key Features

- HDMI and VGA Input
- Eye-care technology for comfortable viewing
- Eco-mode for low energy consumption
- ViewMode color rendering options
- Adaptive sync to eliminate screen tearing & reduce stuttering



## Product Description

The ViewSonic VA2405-h is a 24" Full HD monitor with HDMI and VGA input for business or home usage. Delivering a stunning image quality with low power consumption, this monitor provides six ViewMode presets that deliver optimized screen performance in different applications. Even if used for games, users can move without screen tearing. Besides, the Eye-Care technology helps to eliminate eyestrain from extended viewing periods. With VESA-compatible mount support, this monitor is easy to setup on the wall.

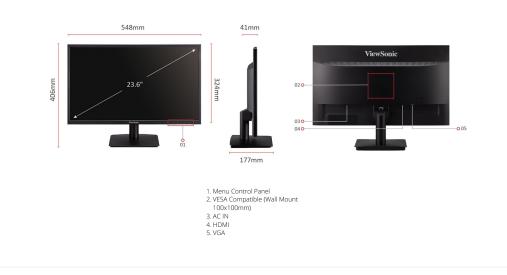



## datasheet\_VA2405-h

DISPLAY			
Display Size (in.):	24	Digital Sync:	TMDS - HDMI (v1.4)
Viewable Area (in.):	23.6	Analog Sync:	Separate - RGB Analog
Panel Type:	VA Technology	ERGONOMICS	
Resolution:	1920 x 1080	Tilt (Forward/Back):	-3° / 20°
Resolution Type:	FHD	WEIGHT (IMPERIAL)	
Static Contrast Ratio:	3,000:1 (typ)	Net (lbs):	7.1
		Net Without Stand (Ibs):	6.2
Dynamic Contrast Ratio:	50M:1	Gross (lbs):	9.9
Light Source:	LED	WEIGHT (METRIC)	
Brightness:	250 cd/m2 (typ)	Net (kg):	3.2
Colors:	16.7M	Net Without Stand (kg):	2.8
Color Space Support:	8 bit (6 bit + Hi-FRC)	Gross (kg):	4.5
Aspect Ratio:	16:9	DIMENSIONS (IMPERIAL) (W)	
Response Time (Typical GTG):	4ms	Packaging (in.):	24 x 15.7 x 5.5
Viewing Angles:	178º horizontal, 178º vertical		21.6 x 16 x 7
Backlight Life (Hours):	30000 Hrs (Min)	Physical (in.):	
Curvature:	Flat	Physical Without Stand (in.):	21.6 x 12.8 x 1.6
Refresh Rate (Hz):	75	DIMENSIONS (METRIC) (WXH	•
Adaptive Sync:	Yes	Packaging (mm):	610 x 400 x 140
Blue Light Filter:	Yes	Physical (mm):	548 x 406 x 177
Flicker-Free:	Yes	Physical Without Stand (mm):	548 x 324 x 41
Color Gamut:	NTSC: 72% size (Typ), sRGB: 104% size (Typ)	GENERAL Regulations:	cTUVus, FCC-B, ICES003, CEC, M CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, RCM, GEMS, BIS
Pixel Size:	0.272 mm (H) x 0.272 mm (V)		
Surface Treatment:	Anti-Glare, Hard Coating (3H)		
			VA2405-H x1, 3-pin Mickey Mouse
PC Resolution (max):	1920x1080	PACKAGE CONTENTS:	Plug (IEC C5) x1, VGA Cable (Male Male) x1, Quick Start Guide x1
Mac® Resolution (max):	1920x1080		Please dispose of in accordance w
PC Operating System:	Windows 10 certified; macOS tested	Recycle/Disposal:	local, state or federal laws.
Mac® Resolution (min):	1920x1080	Warranty:	*Warranty offered may differ from
	102001000	,	market to market
VGA:	1		
HDMI 1.4:	1		
Power in:	3-pin Mickey Mouse Socket (IEC C6)		
POWER Eco Mode (Conserve):	14W		
· · · · ·			
Eco Mode (optimized):	17W		
Consumption (typical):	20W		
Consumption (max):	21W		
Voltage:	AC 100-240V, 50/60 Hz		
Stand-by:	0.3W		
Power Supply:	Internal		
ADDITIONAL HARDWARE			
Kensington Lock Slot:	1		
CONTROLS			
Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)		
On Screen Display:	Input Select, ViewMode, Color		
en eereen biopiaj:	Adjust, Manual Image Adjust, Setup Menu		
OPERATING CONDITIONS			
DPERATING CONDITIONS Temperature:	Menu		
DPERATING CONDITIONS Temperature: Humidity (non-condensing):	Menu 32°F to 104°F (0°C to 40°C)		
DPERATING CONDITIONS Temperature: Humidity (non-condensing): NALL MOUNT	Menu 32°F to 104°F (0°C to 40°C) 20% to 90%		
DPERATING CONDITIONS Temperature: Humidity (non-condensing): NALL MOUNT VESA Compatible:	Menu 32°F to 104°F (0°C to 40°C)		
DPERATING CONDITIONS Temperature: Humidity (non-condensing): NALL MOUNT	Menu 32°F to 104°F (0°C to 40°C) 20% to 90%		

Copyright © ViewSonic Corporation 2000-2020. All rights reserved.