

Smart Plus

3.9

5.2

7.8

10.4

15.6

Product features: Outdoor application (dustproof and waterproof IP65), 360° foldable

Installation features:

1. Can be hung vertically
2. It can be mounted vertically on the building carrier, and the screen can be fixed with reinforcement screws for stability and peace of mind.


Application features:

Various creative shapes such as waves, arcs, rings, steps, etc. can be easily realized.


15mm thickness, does not occupy installation space;

With a weight of 13kg, the installation carrier has low load-bearing requirements;

The slim and lightweight screen design makes installation simple and convenient, saving a lot of installation structure costs, labor and time..

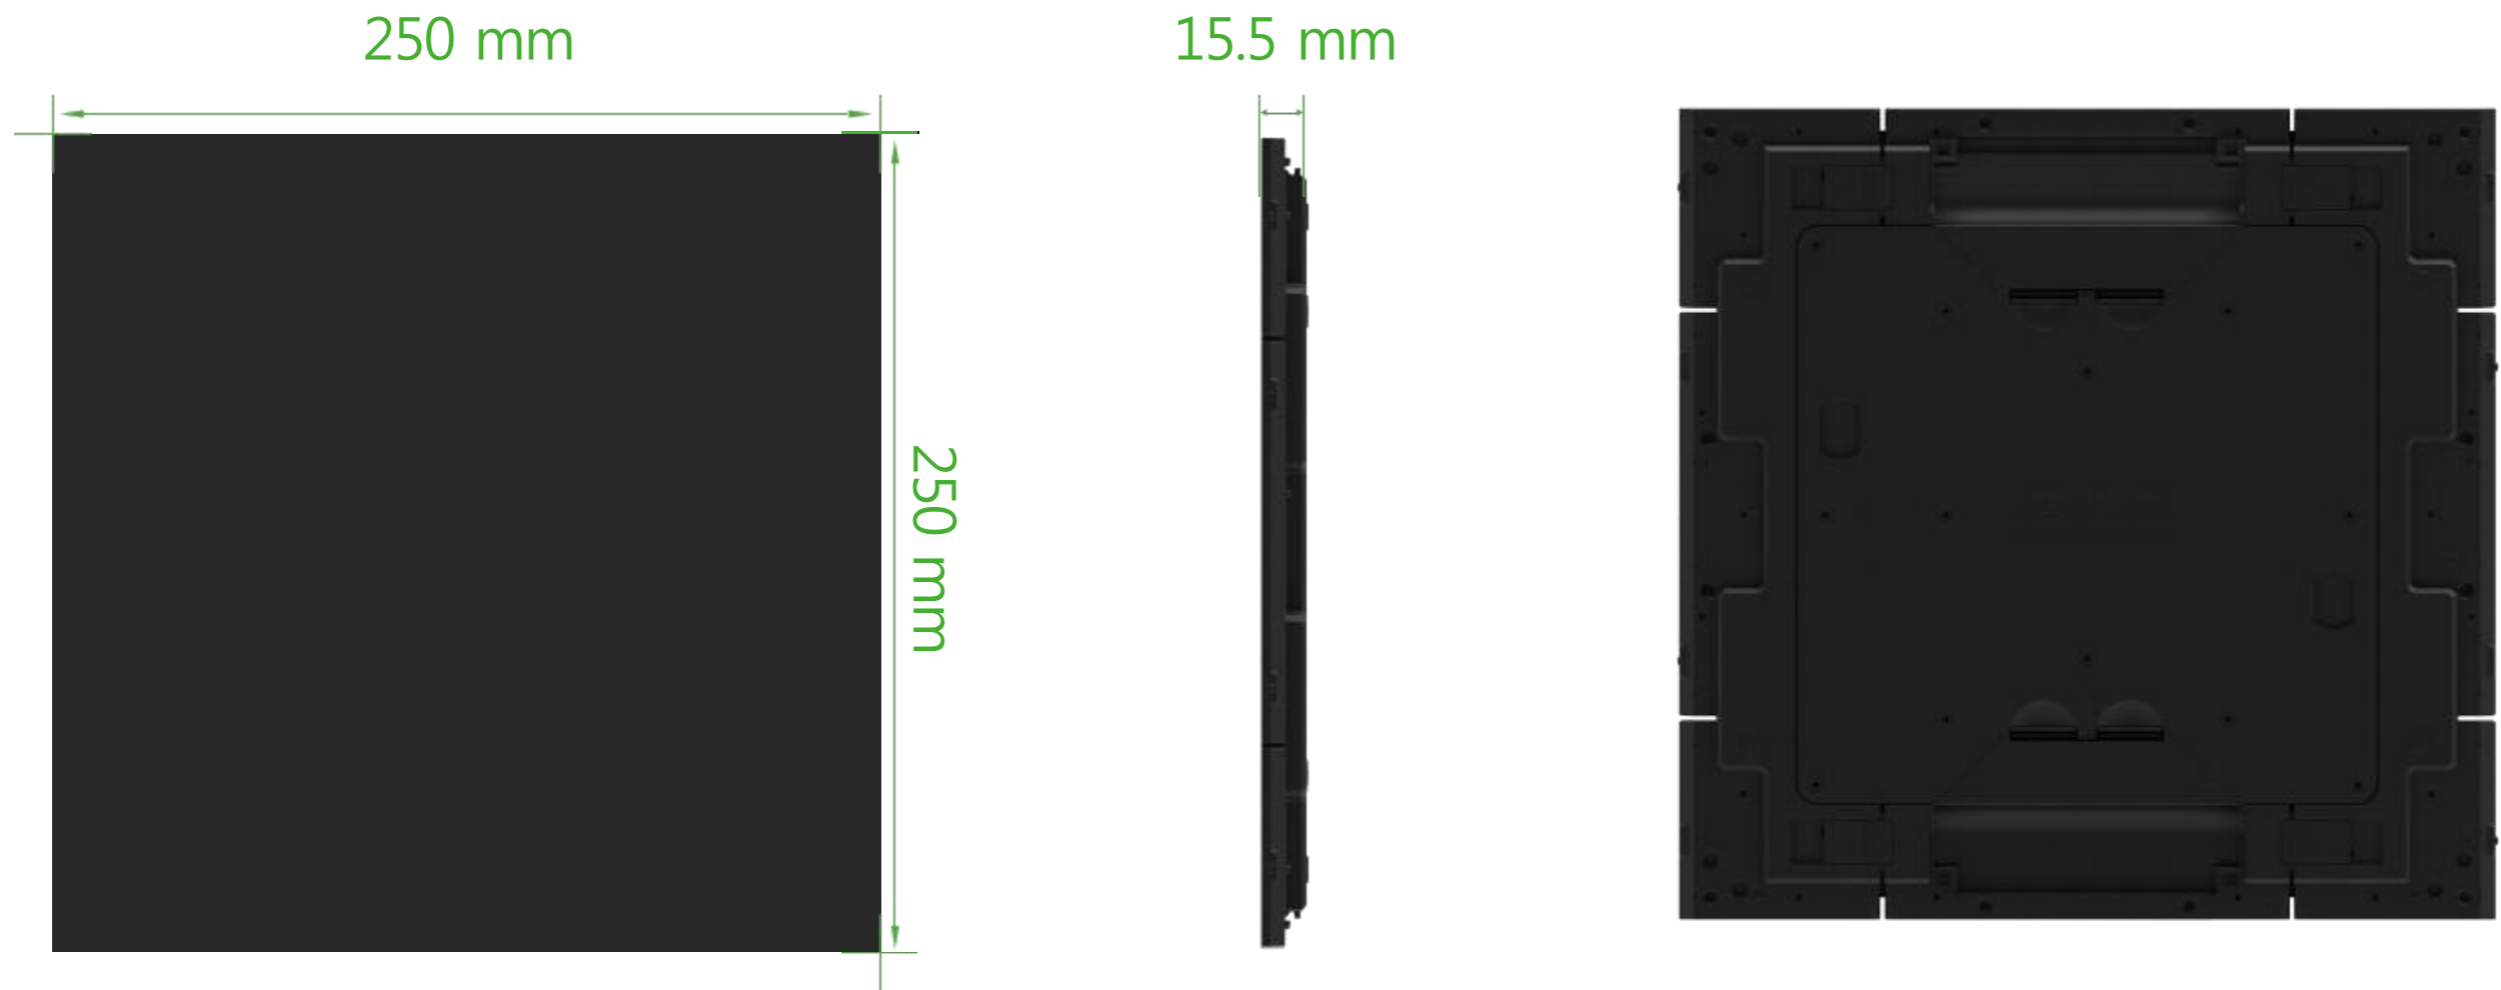

Smart Plus P 3.9

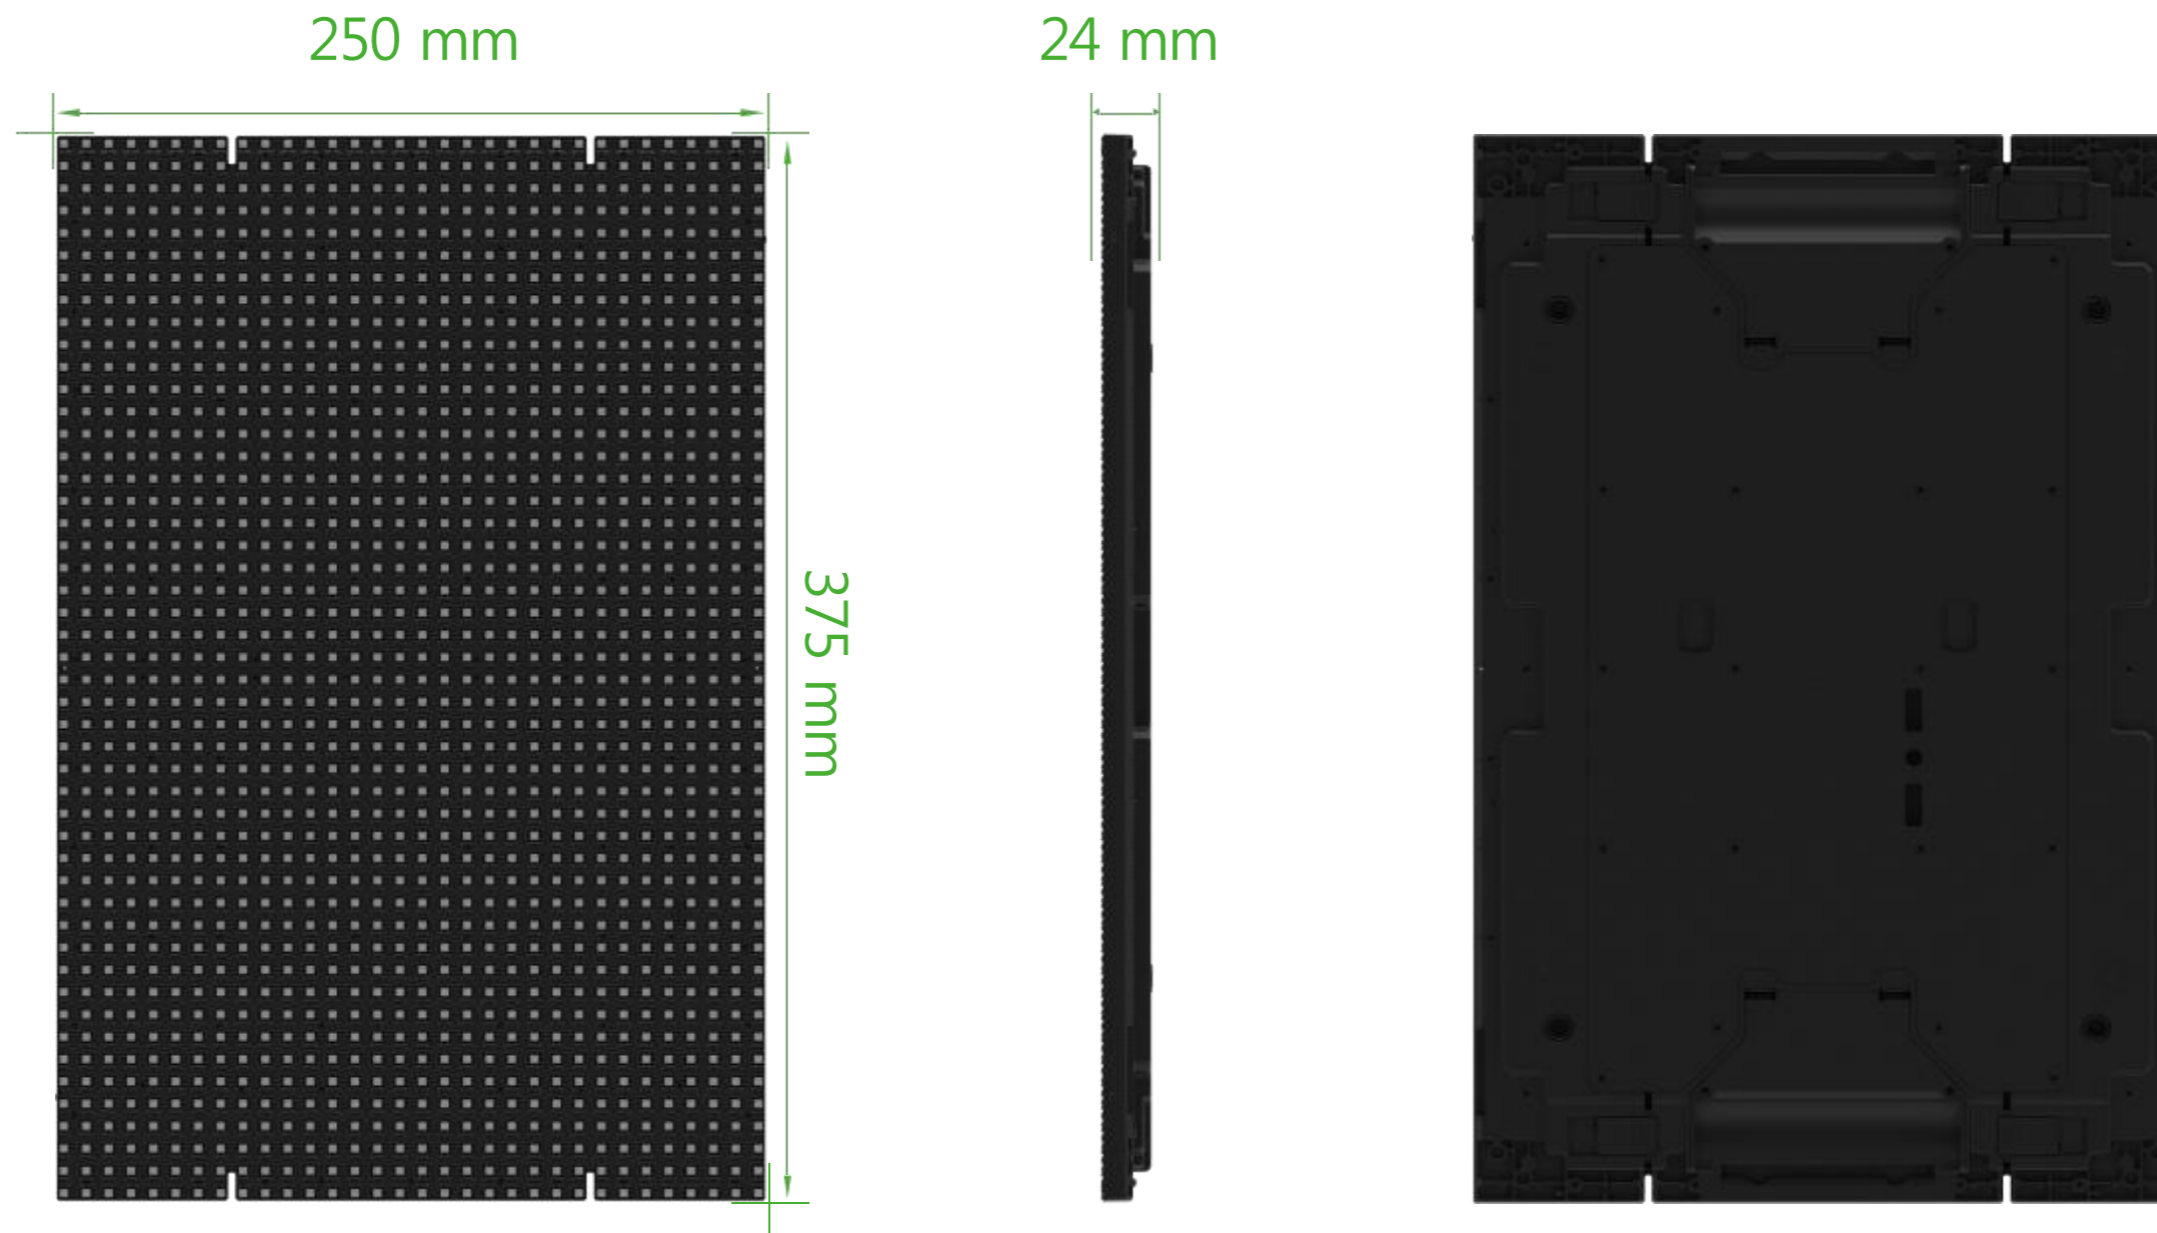

Smart Plus P 5.2/7.8/10.4/15.6



Smart Plus 360° Foldable Outdoor LED Display Screen							
Pixel Pitch(mm)	3.9	5.2		7.8	10.4	15.6	
LED Model	SMD 1921			SMD 2727			
ModuleResolution (pixels)	64 * 64	48 * 72		32 * 48	24 * 36	16 * 24	
Connection	2+19pinBoding 50pin Connector	2+15pin bonding wire CS120 connector		2+19pin boding wire CS120 Connector		2+14pinboding wire CS120 Connector	
Pixel Density (pixel/m ²)	65536	36864		16384		9216	4096
Scan	1/16	1/16	1/12	1/16	1/6	1/3	1/2
Max Brightness (nits)	6000	3000	6000	3000	6000	6000	6000
Max Power (w/m ²)	750	370	740	250	740	740	500
Max Refresh Rate (Hz)	3840			7680			
Optimal Viewing Distance (m)	≥4	≥5		≥8		≥10	≥15
Module Thickness (mm)	15.5	24		18			
Module Size (mm)	250 * 250	250 * 375					
Foldable	180°			360°			
Protection Grade	IP65						
Viewing Angle	120° / 120°						
Gray Level	16						
Weight (kg/m ²)	12						
Working Voltage	DC24V / 48V						
Input Voltage	AC100 ~ AC240						
Brightness Adjustment	Number PWM 256						
Brightness Adjustment	Analog current64-256						
Constrast Rate	2500:1						
Short Circuit Protection	✓						
Quck Maintenance	✓						
Control Way	Synchronous or Asynchronous						
Installation Method	Hanging / Sticking						
Working Temperature (°C)	-40 ~ 65						
Working Humidity (RH)	0% ~ 90%						
Product Certification							