

Smart T Plus

3.9/7.8

7.8


15.6

37.5



Product features: Outdoor application (dustproof and waterproof IP65), hollow design, breathable and rainproof, slim and light | 360° foldable

Installation features: 1. Can be hung vertically
2. Equipped with a motor to achieve one-button remote control, automatic lifting, folding downwards and hiding, and storage in underground bunkers.



Application features: Especially suitable for stage performing arts rental, which can save the cost, labor and time of lifting stage infrastructure and provide the possibility of convenient and flexible realization of creative stage shape

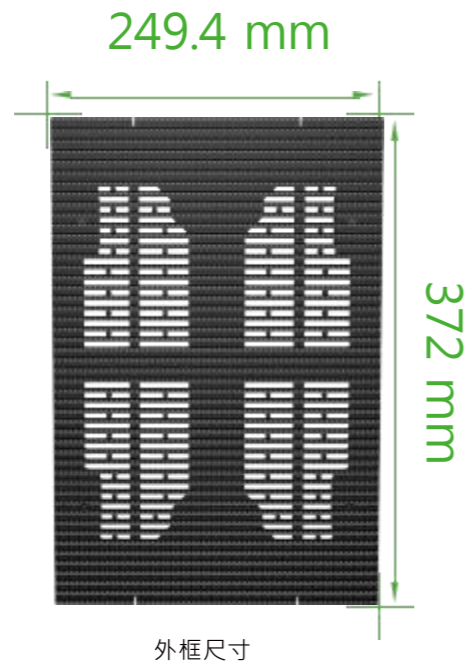

P3.9/7.8

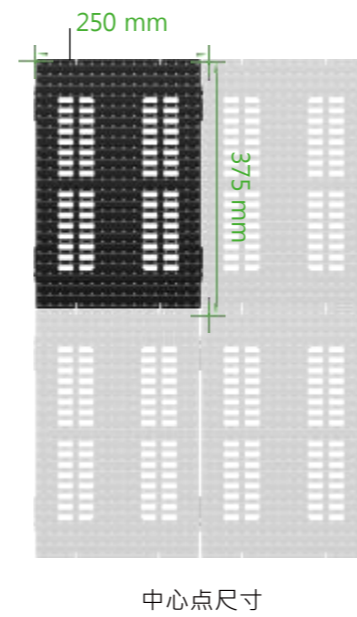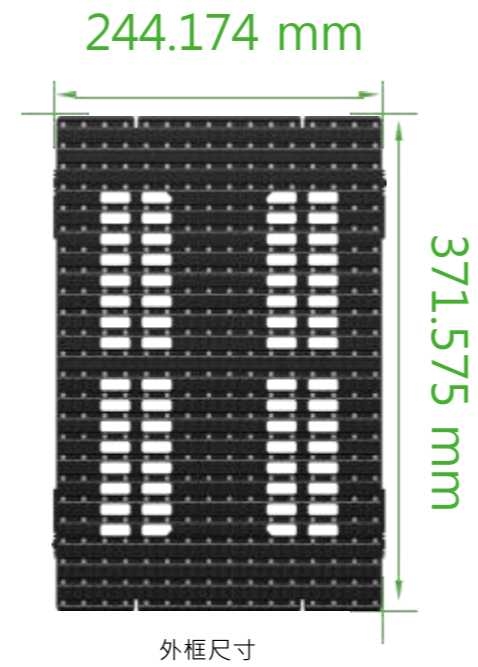

P15.6

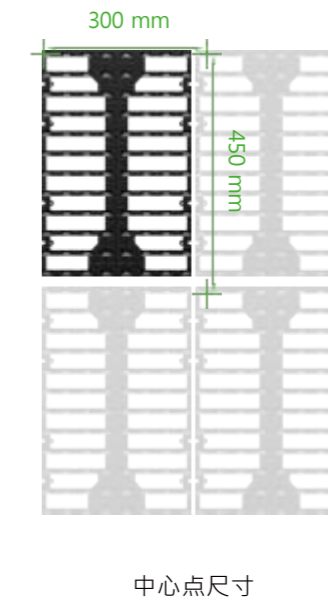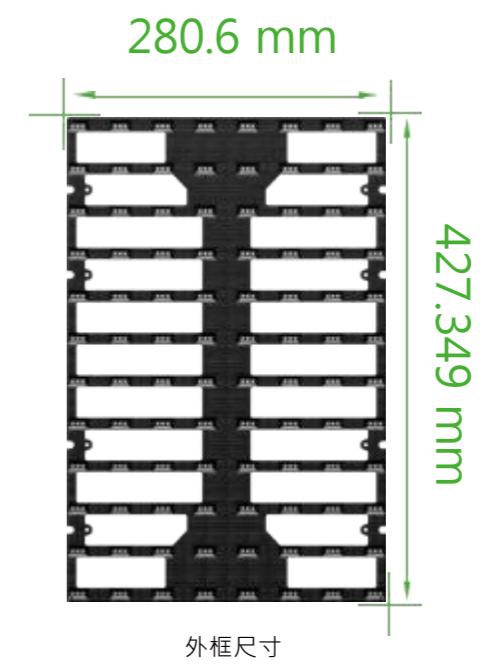

P37.5



Smart T Plus (Rental, fixed installation, floor tile screen)									
360° Folding, hollow breathable, waterproof, fully outdoor, foldable screen									
Pixel Pitch (mm)	H3.9 /V7.8		7.8	15.6	37.5				
LED Type	SMD 1415		SMD 1921		SMD 2727(Gold Wire)				
Module Resolution (pixels)	64 * 48		32 * 48		16 * 24		8* 12		
Transparency	16.37%				14.25%		56%		
Connection (出厂标配) (快速维护)			2+20pin bonding wire CS80 connector			2+14pin bonding wire 50pin connector			
LED QTY./Pixel			/				1	3	
Module Dimension (mm)			250 * 375				300 * 450		
Module Thickness (mm)			18.5		19		22.5		
Weight (kg/m²)			13		16		8		
Optimal Viewing Distance (m)			≥8		≥15		≥38		
Pixel Density (pixel/m²)	32768		16384		4096		711	2133	
Scan	1/8	1/16	1/48	1/8	1/24	1/2	1/12	静态	
Max Brightness (nits)	6000	3900	1300	4500	1500	6000	800	1700	6000
Max Power (w/m²)	760	500	170	500	170	550	80	180	540
Max Refresh Rate (Hz)	7680	3840	1300	7680	2600	7680	3840	7680	
Protection Grade	IP65, (Double-sided glue filling, practical reach IP68)								
Gray (bit)	16								
Foldable	360°								
Viewing Angle (H/V)	Horizontal160° / Vertical120°								
Input Voltage (V)	DC24V/48V								
Input Voltage (V)	AC100 ~ AC240								
Max Loading Height (m)	For a single power box: 30m (Multiple reinforced steel wires for load-bearing)								
Brightness adjust	Number PWM 256 Levels								
Brightness adjut	Analog current 64- 256 Levels								
Contrast Rate	2500:1								
Short Circuit Protection	✓								
Fast Maintenance	Both mechanical connection and electrical connection are supported								
Control Way	Synchronous or Asynchronous								
Installation Method	Hanging, sticking, fixing, floor tile								
Working Temperature (°C)	-40 degree C -- +60 degree C								
Working Humidity (RH)	10%-95%								
Product Certification									