
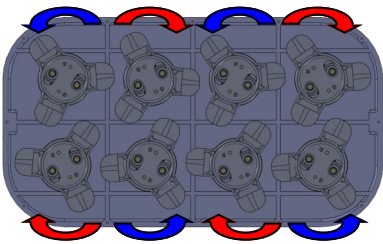


Model 6200

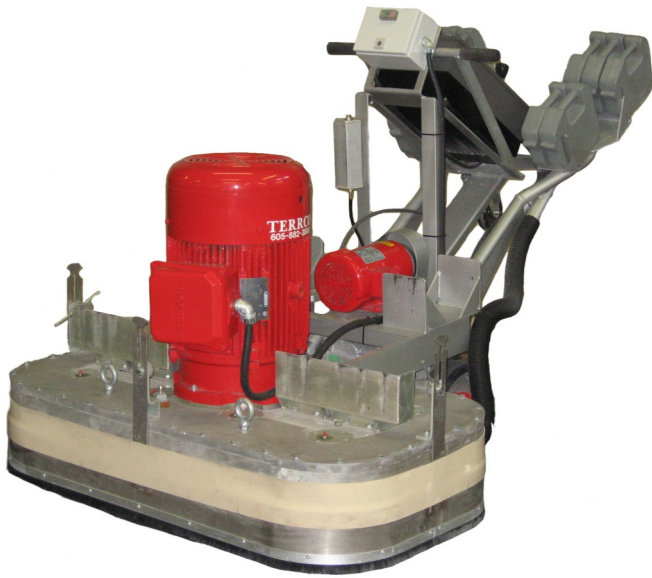

**OPPOSITE
ROTATING
HEADS MEANS
THE USER
DOES NOT
FIGHT THE
MACHINE**

HP/KW	40/30
VOLTAGE	460
PHASE	3
DRIVE	VARIABLE
AMP DRAW	46
BREAKER (AMPS)	60-80
STONE HOLDER RPM	400-760
SWEEP OF DISCS	53-1/2" (1359 mm)
ABRASIVE PRESSURE	1,885 lbs (855 kg)
WIDTH OF MACHINE	55" (1397 mm)
LENGTH OF MACHINE	80" (2032 mm)
HEIGHT OF MACHINE	54" (1372 mm)
NET WEIGHT	2,300 lbs (1043 kg)
SHIPPING WEIGHT	2,565 lbs (1163 kg)
POWER CORD (6-4)	100 ft (30,5 m)

- Optimal for jobs exceeding 20,000 sq. ft.
- Propelling System
- Despite the weight and size the 6200 is easily maneuverable
- Movable weights for easy one person operation
- Stainless Steel Guard with four vacuum ports
- Dry Setup
- Handle Separates from Gear Case to Allow Handle and Case to go through Standard 36" Door
- Ten 42 lbs. Pocket Weights to Control Grinding Pressure
- Uses Plug Stone Shape, Bolt on Beveled Edge Disc, or Speed Shift System

Production Rates

- Mastic removal Rate of 1,500 sq. ft. per hour
- Thin-Set removal rates of 2,500 sq. ft. per hour
- Thin-Mil coatings removal of 1,800 sq. ft. per hour
- Concrete polishing rates of 10,000 sq. ft. per polishing pad per hour (depending on grit)
- Rough Terrazzo rate of 3,500 sq. ft. per day



222 1st Avenue NW • Watertown, SD 57201
 Phone: (605) 882-3888 • Fax: (605) 882-0778
 Email: info@terrco.com • Website: www.terrco.com

