

# Model 2000




HP/KW	15/11.2 or 10/7.5
SWEEP OF DISCS	22-1/2" (571.5 mm)
ABRASIVE PRESSURE	650 LBS (295 kg)
WIDTH OF MACHINE	24" (610 mm)
LENGTH OF MACHINE	67-1/2" (1715 mm)
HEIGHT OF MACHINE	48" (1219 mm)
NET WEIGHT	800 LBS (363 kg)
SHIPPING WEIGHT	975 LBS (442 kg)
WATER TANK	20 gallon (75,7 L)
POWER CORD (6-3)	100 ft. (30,5 m)

## ELECTRICAL OPTIONS

VOLTAGE	230	230	230	460
PHASE	1	3	1	3
DRIVE	MANUAL	MANUAL	VARIABLE	VARIABLE
AMP DRAW	40	37	40	14
BREAKER (AMPS)	60	60	60	30
STONE HOLDER RPM	550	550	500-740	500-740

VALUES BASED ON A 10 HP MOTOR

- Optimal for jobs exceeding 5,000 sq. ft.
- Stainless Steel Guards and Water Tanks
- Wet/Dry Setup
- Direct Drive, No Belts
- Uses Plug Stone Shape, Bolt on to Universal Tool Plate, or Speed Shift System

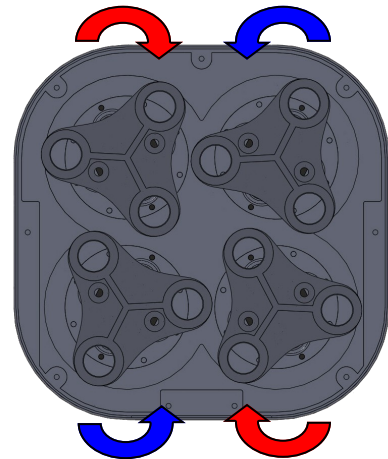

## Production Rates

- Mastic removal rate of 800 sq. ft. per hour
- Thin-Set removal rates of 1,200 sq. ft. per hour
- Thin-Mil coatings removal of 600 sq. ft. per hour
- Concrete polishing rates of 2,000 sq. ft. per polishing pad per hour (depending on grit)
- Rough Terrazzo rate of 1,000 sq. ft. per day



222 1st Avenue NW • Watertown, SD 57201  
 Phone: (605) 882-3888 • Fax: (605) 882-0778  
 Email: info@terrco.com • Website: www.terrco.com

