

# SUNNY BOY 3.0-US / 3.8-US / 5.0-US / 6.0-US / 7.0-US / 7.7-US



SB3.0-1 SP-US-40 / SB3.8-1 SP-US-40 / SB5.0-1 SP-US-40  
SB6.0-1 SP-US-40 / SB7.0-1 SP-US-40 / SB7.7-1 SP-US-40



**COMPLIANT TO UL 1741 SA**  
GRID SUPPORT UTILITY INTERACTIVE INVERTER



## Value-Added Improvements

- Superior integration with SMA's MLPE Power+ Solution
- World's first Secure Power Supply\* now offers up to 2,000 W
- Full grid management capabilities ensure a utility-compliant solution for any market

## Reduced Labor

- New Installation Assistant with direct access via smartphone minimizes time in the field
- Integrated disconnect simplifies equipment stocking and speeds installation

## Unmatched Flexibility

- SMA's proprietary OptiTrac™ Global Peak technology mitigates shade with ease
- Multiple independent MPPTs accommodate hundreds of stringing possibilities

## Trouble-Free Servicing

- Two-part enclosure concept allows for simple, expedited servicing
- Enhanced AFCI technology reduces false tripping while improving sensitivity in real arcs

## SUNNY BOY 3.0-US / 3.8-US / 5.0-US / 6.0-US / 7.0-US / 7.7-US

Reduce costs across your entire residential business model

The residential PV market is changing rapidly. Your bottom line matters more than ever—so we've designed a superior residential solution to help you decrease costs at every stage of your business operations. The Sunny Boy 3.0-US/3.8-US/5.0-US/6.0-US/7.0-US/7.7-US join the SMA lineup of field-proven solar technology backed by the world's #1 service team, along with a wealth of improvements. Simple design, improved stocking and ordering, value-driven sales support and streamlined installation are just some of the ways that SMA helps your business operate more efficiently. And, Sunny Boy's superior integration with the innovative Power+ Solution means installers have even more flexibility in addressing their toughest challenges.

Technical data	Sunny Boy 3.0-US		Sunny Boy 3.8-US		Sunny Boy 5.0-US	
	208 V	240 V	208 V	240 V	208 V	240 V
<b>Input (DC)</b>						
Max. usable DC power	3100 W	3100 W	3450 W	4000 W	5150 W	5150 W
Max. DC voltage	600 V					
Rated MPP voltage range	155 - 480 V		195 - 480 V		220 - 480 V	
MPPT operating voltage range	100 - 550 V					
Min. DC voltage / start voltage	100 V / 125 V					
Max. operating input current per MPPT	10 A					
Max. short circuit current per MPPT	18 A					
Number of MPPT tracker / string per MPPT tracker	2/1				3 / 1	
<b>Output (AC)</b>						
AC nominal power	3000 W	3000 W	3330 W	3800 W	5000 W	5000 W
Max. AC apparent power	3000 VA	3000 VA	3330 VA	3800 VA	5000 VA	5000 VA
Nominal voltage / adjustable	208 V / ●	240 V / ●	208 V / ●	240 V / ●	208 V / ●	240 V / ●
AC voltage range	183 - 229 V	211 - 264 V	183 - 229 V	211 - 264 V	183 - 229 V	211 - 264 V
AC grid frequency	60 Hz / 50 Hz					
Max. output current	14.5 A	12.5 A	16.0 A	16.0 A	24.0 A	24.0 A
Power factor (cos φ)	1					
Output phases / line connections	1 / 2					
Harmonics	< 4 %					
<b>Efficiency</b>						
Max. efficiency	97.2 %	97.6 %	97.2 %	97.5 %	97.2 %	97.5 %
CEC efficiency	96 %	96.5 %	96.5 %	96.5 %	96.5 %	97 %
<b>Protection devices</b>						
DC disconnect device	●					
DC reverse polarity protection	●					
Ground fault monitoring / Grid monitoring	●					
AC short circuit protection	●					
All-pole sensitive residual current monitoring unit (RCMU)	●					
Arc fault circuit interrupter (AFCI)	●					
Protection class / overvoltage category	I / IV					
<b>General data</b>						
Dimensions (W / H / D) in mm (in)	535 x 730 x 198 (21.1 x 28.5 x 7.8)					
Packaging dimensions (W / H / D) in mm (in)	600 x 800 x 300 (23.6 x 31.5 x 11.8)					
Weight / packaging weight	26 kg (57 lb) / 30 kg (66 lb)					
Operating temperature range	- 25 °C ...+60 °C					
Noise emission (typical)	39 dB(A)					
Internal power consumption at night	< 5 W					
Topology	Transformerless					
Cooling concept	Convection					
<b>Features</b>						
Ethernet ports	2					
Secure Power Supply	●*					
Display (2 x 16 characters)	●					
WLAN	●					
Sensor module / External WLAN antenna	○ / ○					
Warranty: 10 / 15 / 20 years	●/○/○					
Certificates and approvals	UL 1741, UL 1998, UL 1699B, IEEE1547, FCC Part 15 (Class A & B), CAN/CSA V22.2 107.1-1					
● Standard features ○ Optional features – Not available	Data at nominal conditions NOTE: US inverters ship with gray lids. * Not functional with Power+ Solution					
Type designation	SB3.0-1SP-US-40		SB3.8-1SP-US-40		SB5.0-1SP-US-40	




Sensor module  
MD.SEN-US-40



External WLAN antenna  
EXTANT-US-40



SMA Rooftop  
Communication Kit  
ROOFCOMMKIT-P1-US

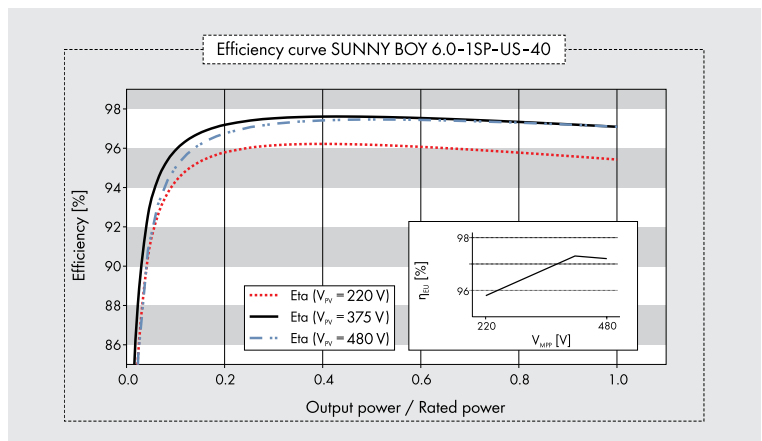

Technical data	Sunny Boy 6.0-US		Sunny Boy 7.0-US		Sunny Boy 7.7-US	
	208 V	240 V	208 V	240 V	208 V	240 V
<b>Input (DC)</b>						
Max usable DC power	5400 W	6200 W	6900 W	7200 W	6900 W	7950 W
Max. DC Voltage	600 V					
Rated MPP Voltage range	220 - 480 V		245 - 480 V		270 - 480 V	
MPPT operating voltage range	100 - 550 V					
Min. DC voltage / start voltage	100 V / 125 V					
Max. operating input current per MPPT	10 A					
Max. short circuit current per MPPT	18 A					
Number of MPPT tracker / string per MPPT tracker	3 / 1					
<b>Output (AC)</b>						
AC nominal power	5200 W	6000 W	6660 W	7000 W	6660 W	7680 W
Max. AC apparent power	5200 VA	6000 VA	6660 VA	7000 VA	6660 VA	7680 VA
Nominal voltage / adjustable	208 V / ●	240 V / ●	208 V / ●	240 V / ●	208 V / ●	240 V / ●
AC voltage range	183 - 229 V	211 - 264 V	183 - 229 V	211 - 264 V	183 - 229 V	211 - 264 V
AC grid frequency	60 Hz / 50 Hz					
Max. output current	25.0 A	25.0 A	32.0 A	29.2 A	32.0 A	32.0 A
Power factor (cos φ)	1					
Output phases / line connections	1 / 2					
Harmonics	< 4 %					
<b>Efficiency</b>						
Max. efficiency	97.2 %	97.6 %	97.1 %	97.5 %	97.1 %	97.5 %
CEC efficiency	96.5 %	97 %	96.5 %	97 %	96.5 %	97 %
<b>Protection devices</b>						
DC disconnect device	●					
DC reverse polarity protection	●					
Ground fault monitoring / Grid monitoring	●					
AC short circuit protection	●					
All-pole sensitive residual current monitoring unit (RCMU)	●					
Arc fault circuit interrupter (AFCI)	●					
Protection class / overvoltage category	I / IV					
<b>General data</b>						
Dimensions (W / H / D) in mm (in)	535 x 730 x 198 (21.1 x 28.5 x 7.8)					
Packaging Dimensions (W / H / D) in mm (in)	600 x 800 x 300 (23.6 x 31.5 x 11.8)					
Weight / packaging weight	26 kg (57 lb) / 30 kg (66 lb)					
Operating temperature range	- 25 °C ... +60 °C					
Noise emission (typical)	39 dB(A)		45 dB(A)			
Internal power consumption at night	< 5 W					
Topology	Transformerless					
Cooling concept	Convection			Fan		
<b>Features</b>						
Ethernet ports	2					
Secure Power Supply	●*					
Display (2 x 16 characters)	●					
WLAN	●					
Sensor module / External WLAN antenna	○ / ○					
Warranty: 10 / 15 / 20 years	●/○/○					
Certificates and approvals	UL 1741, UL 1998, UL 1699B, IEEE1547, FCC Part 15 (Class A & B), CAN/CSA V22.2 107.1-1					
● Standard features ○ Optional features – Not available	Data at nominal conditions NOTE: US inverters ship with gray lids. * Not functional with Power+ Solution					
Type designation	SB6.0-1SP-US-40		SB7.0-1SP-US-40		SB7.7-1SP-US-40	

## POWER+ SOLUTION

The SMA Power+ Solution combines legendary SMA inverter performance and intelligent DC module-level electronics in one cost-effective, comprehensive package. This means that you can achieve maximum solar power production for your customers while also realizing significant installation savings.

Unlike conventional microinverter and DC optimizer systems, Power+ is faster to install, provides more flexibility, boasts logistical advantages, and reduces service risk.

Visit [www.SMA-America.com](http://www.SMA-America.com) for more information.





### SIMPLE, FLEXIBLE DESIGN

Speed the completion of customer proposals and maximize the efficiency of your design team with the Sunny Boy-US series, which provides a new level of flexibility in system design by offering:

- » Hundreds of stringing configurations and multiple independent MPPTs
- » SMA's proprietary OptiTrac™ Global Peak shade mitigation technology
- » Diverse application options including on- and off-grid compatibility



### VALUE-DRIVEN SALES ENABLEMENT

SMA wants to enable your sales team by arming them with an abundance of feature/benefit support. Show your customers the value of the Sunny Boy-US series by utilizing:

- » Secure Power Supply, now with 2,000 W of opportunity power in the event of a grid outage, as an increased value-add or upsell opportunity
- » SMA's 35 year history and status as the #1 global inverter manufacturer instills homeowners with peace of mind and the long-term security they demand from a PV investment
- » An economical solution for shade mitigation and the challenges of complex roofs



### IMPROVED STOCKING AND ORDERING

Ensure that your back office business operations run smoothly and succinctly while mitigating potential errors. The Sunny Boy-US series can help achieve cost savings in these areas by providing:

- » An integrated DC disconnect that simplifies equipment stocking and allows for a single inverter part number
- » All communications integrated into the inverter, eliminating the need to order additional equipment



### STREAMLINED INSTALLATION AND COMMISSIONING

Expedite your operations in the field by taking advantage of the new Sunny Boy's installer-friendly feature set including:

- » Direct access via smartphone and utilization of SMA's Installation Assistant, which minimizes time/labor spent in the field and speeds the path to commissioning
- » Improved communication—no need to install additional equipment
- » Integrated DC disconnect that simplifies onsite logistics and eliminates the need to install a separate disconnect unit, speeding overall installation time



### SUPERIOR SERVICE

SMA understands the factors that contribute to lifetime PV ownership cost, that's why the Sunny Boy-US series was designed for maximum reliability and backstopped by an unmatched service offering. Benefit from:

- » The new Sunny Boy's two-part enclosure concept that separates the connection unit from the power unit, which allows for simple, expedited servicing
- » The #1 service team in the PV industry, as recognized by IMS research, with experience servicing an installed base of more than 55 GW



Available from:

**SolarPanelStore.com**  
EVERYTHING YOU NEED TO GO SOLARI