



MS9520 Voyager® is an advanced auto-trigger, single line laser bar code scanner that is equally effective hand held or in the stand for presentation scanning.

MS9520 Voyager®

Features

- Automatic trigger
- Decodes RSS-14, RSS Limited and RSS Expanded bar codes
- User-replaceable, single cable interface to host
- Adjustable stand
- Firmware updates via Flash ROM
- Custom edit the bar code data
- Easy programming using Windows® software or bar codes
- Supports commonly used interfaces, including Keyboard Wedge and USB
- OPOS and JPOS system compatible



Metrologic's MS9520 Voyager

with a futuristic design and high-performance scanning system represents the best auto-triggered scanner value on the market.

Metrologic's goal was to develop a hand-held scanner that was equally effective as a presentation device and would incorporate several innovative new features while making it durable enough to offer a five year warranty. Flash ROM upgrades, data editing utilities and user-replaceable cables lead the extensive features list of what has become the industries guide for measuring hand-held laser bar code scanners, MS9520 Voyager.



Flash ROM allows the firmware to be upgraded easily, and as software updates become available, each Voyager can be updated with all of the latest features utilizing an easy-to-use Windows®-based program. Using Bits 'n' Pieces® data editing utility, users can custom-edit the bar code data to meet the requirements of the host system.

Voyager includes the ability to decode the emerging Reduced Space Symbology (RSS). Industries including supermarkets, pharmaceutical, and healthcare are beginning to utilize this new symbology. For those Voyager's already deployed, an online Flash ROM upgrade is available at www.metrologic.com.



MS9520 Voyager®

OPERATIONAL

Light Source	Visible Laser Diode 650 nm \pm 10 nm
Laser Power	0.96 mW (peak)
Depth of Scan Field (programmable)	0 mm - 203 mm (0" - 8") for 0.33 mm (13 mil) bar codes
Width of Scan Field	64 mm (2.5") @ face; 249 mm (9.8") @ 203 mm (8.0")
Scan Speed	72 \pm 2 scan lines per second
Scan Pattern	Single scan line
Minimum Bar Width	0.127 mm (5.0 mil)
Decode Capability	Autodiscriminates all standard bar codes, including RSS; for other symbologies call Metrologic
System Interfaces	PC Keyboard Wedge, RS232, OCIA, Light Pen Emulation, Non-decode Emulation, IBM 468X/469X, Stand Alone Keyboard, USB (low speed and full speed)
Print Contrast	35% minimum reflectance difference
Number Characters Read	Up to 80 data characters
Roll, Pitch, Yaw	42°, 68°, 52°
Beeper Operation	7 tones or no beep
Indicators (LED)	Green = laser on, ready to scan; yellow = auto trigger mode active; red = good read

MECHANICAL


Height	198 mm (7.8")
Depth	40 mm (1.6")
Width	Handle - 80 mm (3.1"); Head - 102 mm (4.0")
Weight	149 g (5.25 oz)
Termination	10 pin modular RJ45
Cable	Standard 2.7 m (9') coiled; optional 2.1 m (7') straight

ELECTRICAL


Input Voltage	5 VDC \pm 0.25 V
Power - Operating	575 mW
Power - Standby	225 mW
Current - Operating	100 mA typical @ 5 VDC
Current - Standby	22 mA typical @ 5 VDC
DC Transformers	Class 2; 5.2 VDC @ 650 mA
Laser Class	CDRH: Class II; IEC 60825-1:1993 + A1:1997 + A2:2001
EMC	FCC, ICES-003 & EN55022 Class B

Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-40°C to 60°C (-40°F to 140°F)
Humidity	5% to 95% relative humidity, non-condensing
Light Levels	Up to 4842 Lux (450 footcandles)
Shock	Designed to withstand 1.5 m (5') drops
Contaminants	Sealed to resist airborne particulate contaminants
Ventilation	None required


Voyager is available in the following colors




Scan Area

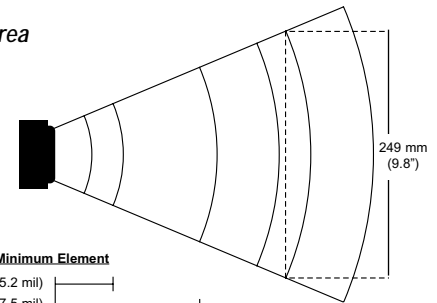


Bar Code Minimum Element

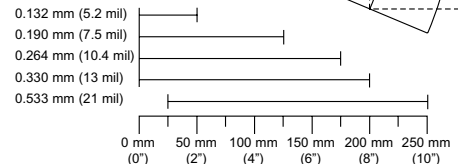

IR Activation and Scan Width

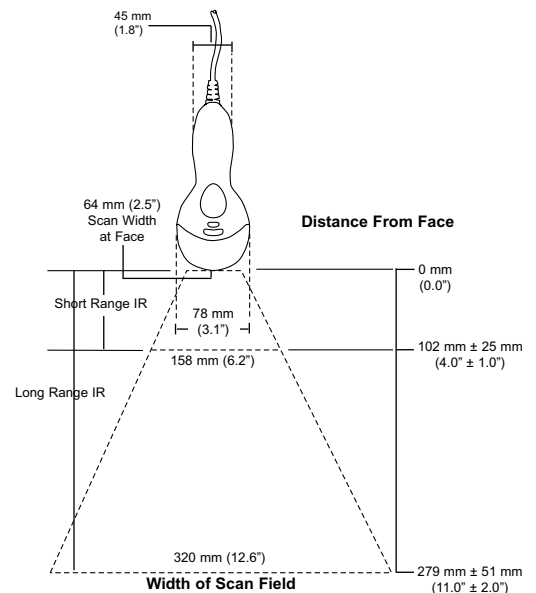

Dimensions



Specifications subject to change without notice.
Printed U.S.A., Copyright November 2002
Metrologic, All rights reserved.



DS9520

EUROPEAN REGIONAL OFFICES

Eastern Europe, Middle East & Africa
Metrologic Instruments GmbH
Tel: +49 (0) 89 89 019 222
Fax: +49 (0) 89 89 019 173
Email: info@east.metrologic.com
www.europe.metrologic.com

France
Metrologic Eria France SA
Tel: +33 (0) 1 48.63.78.78
Fax: +33 (0) 1 48.63.24.94
Email: info@fr.metrologic.com
www.europe.metrologic.com

Germany
Metrologic Instruments GmbH
Tel: +49 (0) 89 89 019 0
Fax: +49 (0) 89 89 019 200
Email: info@de.metrologic.com
www.metrologic-instruments.de

Italy
Metrologic Instruments Italia Srl
Tel: +39 0 51 6511978
Fax: +39 0 51 6521337
Email: info@it.metrologic.com
www.metrologic.it

Spain
Metrologic Eria Ibérica SL
Tel: +34 91 327 24 00
Fax: +34 91 327 38 29
Email: info@es.metrologic.com
www.metrologic.es

United Kingdom
Metrologic Instruments UK
Tel: +44 (0)1256 365900
Fax: +44 (0)1256 365955
Email: info@uk.metrologic.com
www.metrologic.co.uk

USA
Metrologic Instruments, Inc.
Tel: 1-800-ID-METRO
Fax: 1-856-228-6673
Email: info@metrologic.com

South America
Metrologic South America
Tel: 5511-5505-6568
Fax: 5511-5505-1681
Email: info@sa.metrologic.com

Brazil (only)
Metrologic do Brasil Ltda.
Tel: 5511-5505-2396
Fax: 5511-5507-2301
Email: info@br.metrologic.com

Asia
Metrologic Asia (Pte) Ltd.
Tel: 65-842-7155
Fax: 886-3-2888292
Email: info@sg.metrologic.com

China (only)
Metro (Suzhou) Technologies Co.Ltd
Tel: 86-512-2572511
Fax: 86-512-2571517
Email: info@cn.metrologic.com

