

The background features decorative curved lines. A thick grey line curves from the top left towards the bottom right. A thinner green line follows a similar path, positioned above the grey one. The bottom right corner is filled with a solid green color.

novostella

Switch Controlled Security Light User Guide

## Contact Us

Have some issue? No worries! Please reach us via these channels.  
Our customer services team is more than happy to help.



***support@novostella.net***



***www.novostella.net***



We are social. Get connected!



@Novostella\_US



@novostella\_lighting



@novostella\_official



fb.com/novostella.fans



@Novostella\_official

## Switch Controlled Security Light User Guide

---

Thank you for ordering from Novostella. Set-up is easy and takes only a few minutes by following the instructions.

This LED security light is switch controlled, just install it and control it ON/OFF by a wall switch.

- White light adjustable design, can be selected through the wall switch: 6000K/4500K/3000K three different color temperature.
- AC Power Hardwired, NOT Solar Powered, NOT Battery Powered.
- No motion sensor, No dusk to dawn sensor.
- NOT Dimmable. Brightness NOT adjustable.




### **Warning**


- (1) Please check if the light and the parts are intact before installation.
- (2) Make sure to cut off power before installation.
- (3) Please do not place this light in corrosive conditions.
- (4) If there is any damage to the cord, please cut off the power and stop using it immediately.
- (5) Please do not retrofit the light within the warranty period.
- (6) To ensure the light works properly, please use the voltage indicated on the packing.

## 1. Parameters



P/N	NTA15B-CW-US-2	NTA15B-CW-US-1
Quantity	2-Pack	1-Pack
Model	NTA15	
Wattage	45W	
Color	Black	
Color Temperature	6000K/4500K/3000K Selectable	
Dimmable	No	
Max Luminous Flux	4200lm	
Input Voltage	AC120V	
Frequency	50/60Hz	
Life Expectancy	50000Hr	
Working Temperature	-20°C-40°C	

## 2. Components

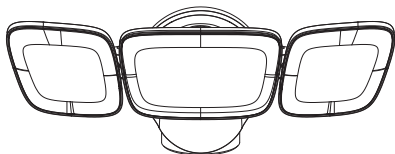

-  1 Screw head
-  2 Screws
-  3 Wire Connectors
-  Mounting Bolt
-  Mounting Strap
-  Gasket

### 3. Dimension

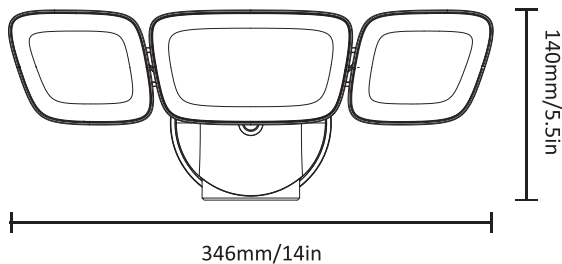

Weight: 1.8lb/0.8kg


## 4. Installation

### Safety Information:


- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Turn power OFF before installing.

### Installations:


For best performance, mount the light about 6.5-8ft above the ground.

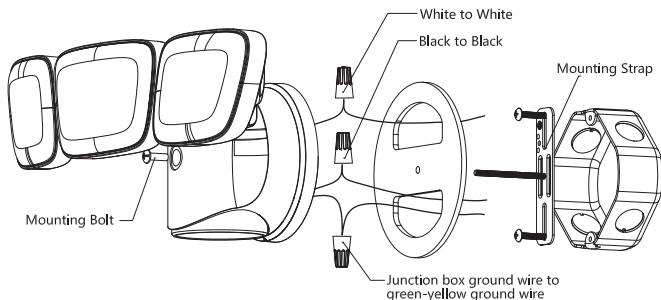

1. Turn off the power.
2. Install the mounting strap as shown with two screws that fit your junction box.
3. Tighten the wires with wire connectors. L should be connected to Black wire, N should be connected to White wire.

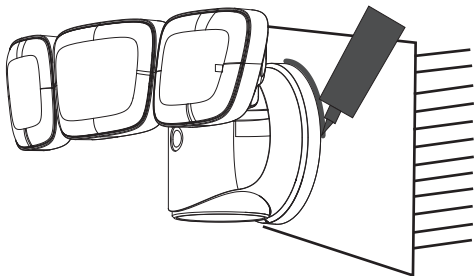

4. After mounting the light, apply silicone sealant completely around the perimeter of the cover plate where the back of the cover plate meets the mounting surface. Silicone sealant prevents water from seeping into the junction box.
5. Quickly switch the wall switch to change between 3 color temperature of white light: 6000K(Cool White), 4500K(Neutral White), 3000K(Warm White).

**Note:**

- After power off over 7 seconds, the light will remember the last selected color temperature.
- Wall switch control, NOT Dimmable. Brightness NOT adjustable.

# novostella

## E-manual



Step 1: Scan the QR code

Step 2: Click E-manual PDF file

Step 3: Read file online or download



Go paper-free, make life easier, and do something good for the environment.

FC   
MADE IN CHINA