

10w + 15w 5 Colour Recessed Spot Lights Installation Instructions




Product Specifications

| | | | | |
|------------------|--|-------------|--|-------------|
| Model No. | HCP-1022122 | HCP-1032122 | HCP-1022222 | HCP-1032222 |
| Material | Aluminium | | | |
| Colour | Black | White | Black | White |
| IP Rating | IP20 | | IP20 | |
| Cut Out | 70mm | | 70mm | |
| Input Voltage | 240v | | 240v | |
| Protection Class | 2 (No Earth Required) <input type="checkbox"/> | | 2 (No Earth Required) <input type="checkbox"/> | |
| Lamp Base | Built in LED | | Built in LED | |
| Lamp Wattage | 1x 10w | | 1x 15w | |
| Colour Temp | 5-Colour - 2700k, 3000k, 4000k, 5000k, 5700k | | 5-Colour - 2700k, 3000k, 4000k, 5000k, 5700k | |
| Lumens | 518lm, 532lm, 582lm, 614lm, 626lm | | 819lm, 879lm, 973lm, 1000lm, 876lm | |
| CRI | > 90 | | > 90 | |
| Dimmable | Yes - Triac Dimmable | | Yes - Triac Dimmable | |
| Warranty | 5 Years Replacement* | | 5 Years Replacement* | |

10w Dimensions


Cut Out Ø70mm

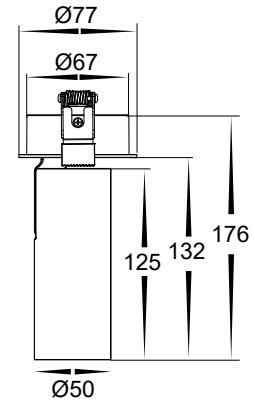

Important Safety Issues:


- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Commercial does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

Cut Out Dimensions

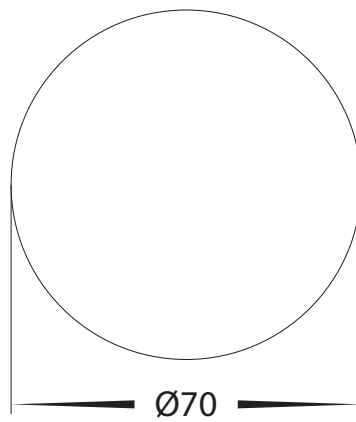

15w Dimensions

Cut Out Ø70mm

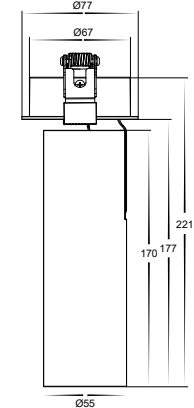

Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Cut out hole to size shown above.
3. Insert cables into connector blocks on fitting,
4. Insert fitting into hole by pulling up the clips and inserting into hole and releasing so clips can spring back onto ceiling to hold fitting into place.
5. Fitting is set to 3000k, while fitting is switched off slide switch located on the back of light fitting to desired colour temperature.
6. Direct light fitting to desired position by twisting left and right or up and down making sure not to twist too far to avoid damaging fitting.
7. Repeat these steps if more than 1 fitting is being installed
8. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Steps for Installation of Honeycomb lens:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove inner ring from fitting by twisting anti-clockwise
3. Insert Honeycomb lens into back of inner ring
4. Reinsert inner ring by twisting clockwise until it cannot twist anymore

Steps for Installation of lens:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove inner ring from fitting by twisting anti-clockwise
3. Insert lens into fitting.
4. Reinsert inner ring by twisting clockwise until it cannot twist anymore

Steps for Installation of Coloured Inner Ring:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove inner ring from fitting by twisting anti-clockwise.
3. Insert new coloured inner ring by twisting clockwise until it cannot twist anymore
4. Reinsert inner ring by twisting clockwise until it cannot twist anymore

Must be installed by a licensed electrician

Contact Details:

8/133 Beauchamp Road
Matraville NSW 2036
Australia
Tel: 02 9381 8383
Email: sales@havitcommercial.com.au
Web: www.havitcommercial.com.au

Warranty Terms & Conditions*



www.havitcommercial.com.au

