


# 6w or 9w Tri Colour Surface Mounted Spot Light Installation Instructions



## Product Specifications

Model No.	HCP-1020931	HCP-1030931	HCP-1020932	HCP-1030932	HCP-1020933	HCP-1030933	HCP-1020934	HCP-1030934
Material	Aluminium		Aluminium		Aluminium		Aluminium	
Colour	Black	White	Black	White	Black	White	Black	White
IP Rating	IP20		IP20		IP20		IP20	
Input Voltage	240v		240v		240v		240v	
Protection Class	1 (Earth Required)		1 (Earth Required)		1 (Earth Required)		1 (Earth Required)	
Installation Type	Wall or Ceiling - Surface MOUNTed		Wall or Ceiling - Surface MOUNTed		Wall or Ceiling - Surface MOUNTed		Wall or Ceiling - Surface MOUNTed	
Lamp Base	Built in LED		Built in LED		Built in LED		Built in LED	
Lamp Wattage	1x 6 or 9w		1x 6 or 9w		1x 6 or 9w		1x 6 or 9w	
Colour Temp	Tri-Colour - 3000k, 4000k, 5000k		Tri-Colour - 3000k, 4000k, 5000k		Tri-Colour - 3000k, 4000k, 5000k		Tri-Colour - 3000k, 4000k, 5000k	
Lumens	630-874lm, 668-943lm, 663-921lm		570-791lm, 607-589lm, 631-847lm		558-767lm, 596-832lm, 595-828lm		526-742lm, 562-797lm, 559-778lm	
CRI	> 90		> 90		> 90		> 90	
Dimmable	Yes - Triac Dimmable		Yes - Triac Dimmable		Yes - Triac Dimmable		Yes - Triac Dimmable	
Warranty	5 Years Replacement*		5 Years Replacement*		5 Years Replacement*		5 Years Replacement*	

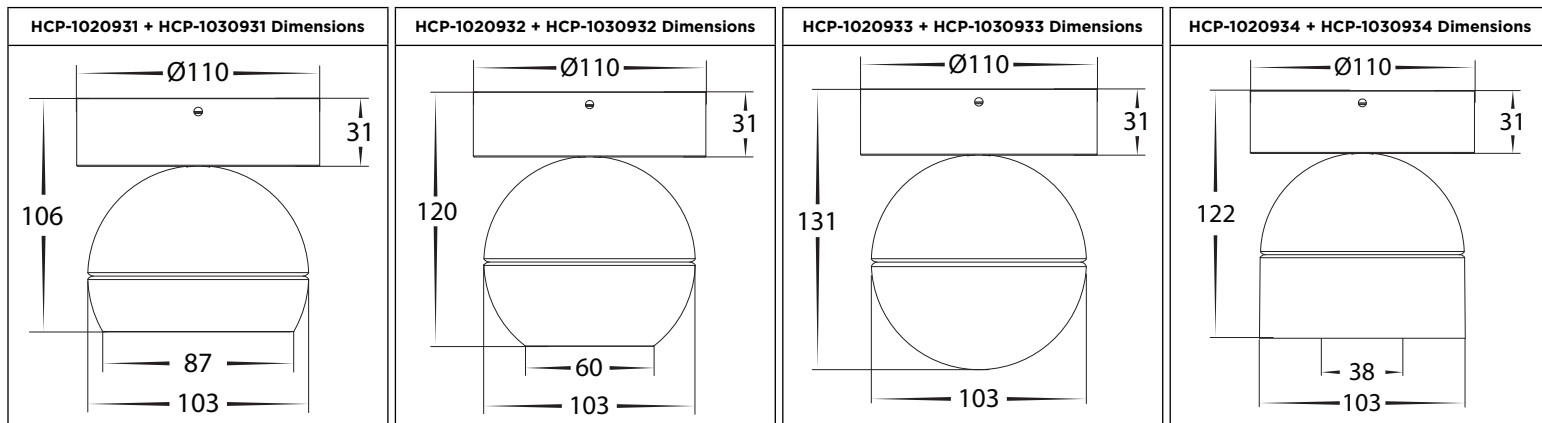

### Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Commercial does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

### Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove Base Plate by loosening Allen Screws on side of fitting
3. Insert Cable through cable entry hole
4. Attach Base Plate to ceiling or wall using appropriate screws for application
5. Using cable with earth, Insert cables into connector blocks on fitting.
6. Reattach fitting to baseplate and tighten allen screws
7. Fitting is set to 3000k and 9w, while fitting is switched off remove front lens by twisting anti clockwise
8. Select desired colour temperature and wattage by sliding switches
9. Reattach lens by twisting clockwise until you cannot twist anymore.
10. Direct light fitting to desired position by twisting left and right or up and down making sure not to twist too far to avoid damaging fitting.
11. Repeat these steps if more than 1 fitting is being installed
12. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

### Steps for Installation of Coloured Inner Ring:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove inner ring from fitting by pulling gently
3. Insert new coloured inner ring by lining up magnets and release

**Must be installed by a licensed electrician**

### Contact Details:

8/133 Beauchamp Road  
Matraville NSW 2036  
Australia  
Tel: 02 9381 8383  
Email: sales@havitcommercial.com.au  
Web: www.havitcommercial.com.au

### Warranty Terms & Conditions\*



[www.havitcommercial.com.au](http://www.havitcommercial.com.au)

