


Square LED Panel Lights Installation Instructions



Product Specifications

Model No.	HCP-173400-S	HCP-173400-S-ND	HCP-173400-S-DALI	HCP-14340-S-REC	HCP-17340-S-SM	HCP-17341-S-SM
Material	Aluminium + Polycarbonate			Aluminium	Aluminium	Aluminium
Colour	White			White	White	White
IP Rating	IP20			IP20	IP20	IP20
Cut Out	N/A			610mmx610mm	N/A	N/A
Input Voltage	240v				N/A	
Protection Class	2 (No Earth Required) <input type="checkbox"/>				N/A	
Lamp Base	Built in LED				N/A	
Lamp Wattage	1x 40w				N/A	
Colour Temp	Tri-Colour - 3000k, 4000k, 5500k				N/A	
Lumens	2900lm, 3100lm, 3300lm				N/A	
CRI	> 90				N/A	
Dimmable	Yes - Triac Dimmable	No	Dali Dimmable		N/A	
Warranty	5 Years Replacement*				5 Years Replacement*	

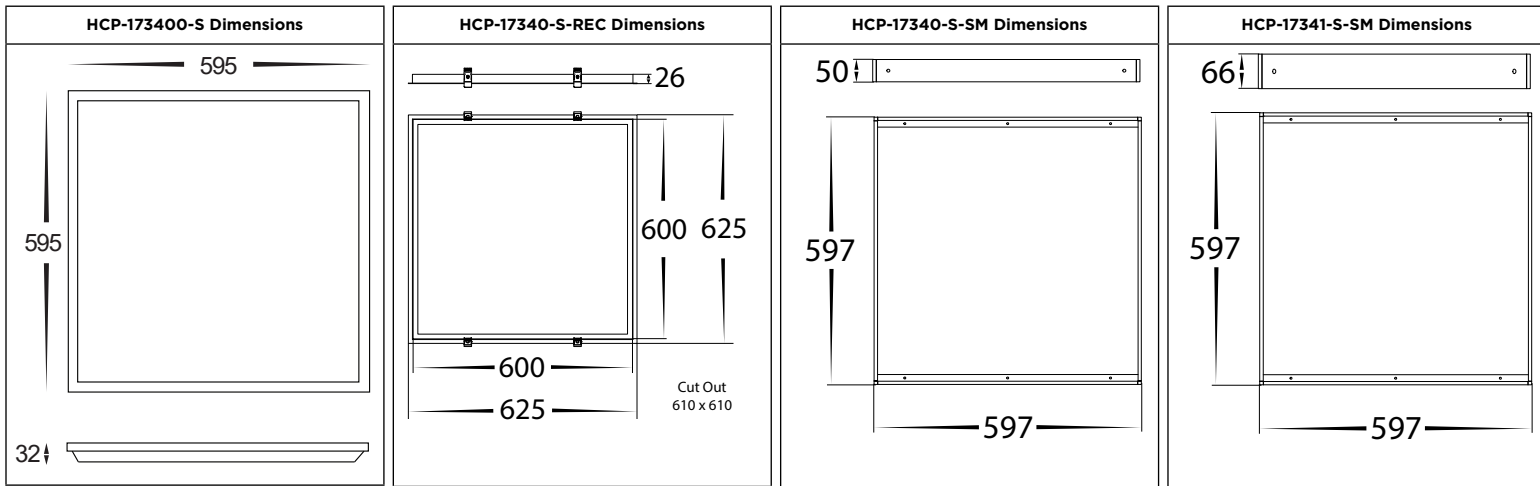

Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Commercial does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty.
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

HCP-173400-S Steps for Installation in grid ceiling:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove ceiling tile where light is to be installed.
3. Connect LED Driver to plug base already in ceiling.
4. Insert Panel into ceiling space and allow for fitting to sit back onto ceiling grid.
5. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

HCP-173400-S Steps for Installation using HCP-17340-S-REC Recessed kit:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Cut hole using dimension on line drawing and in table.
3. Connect LED Driver to plug base already in ceiling.
4. Insert Panel into recessed panel and allow for fitting to sit back onto panel.
5. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

HCP-173400-S Steps for Installation using HCP-17340-S-SM + HCP-17341-S-SMSurface Mount kit:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Assemble surface mount kit using screws provided making sure to leave 1 side off to allow for panel to slide in.
3. Attach surface mount kit in desired location using appropriate screws for application.
4. Connect LED Driver to plug and slide panel into place.
5. Reattach side using screws provided.
6. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Must be installed by a licensed electrician

Contact Details:

8/133 Beauchamp Road
Matraville NSW 2036
Australia
Tel: 02 9381 8383
Email: sales@havitcommercial.com.au
Web: www.havitcommercial.com.au

Warranty Terms & Conditions*



www.havitcommercial.com.au

