


60w Dali + Push Dim Constant Voltage IP20 LED Driver





Product Specifications

Material	Plastic
Colour	White
IP Rating	IP20
Input Voltage	100 - 240v AC
Output Voltage	24v DC Constant Voltage
Max Wattage	60w
Recommended Max Wattage	48w
Protection Class	Class 2 (No Earth Required)
Dimming Methods	Dali or Push Dim
Dimming Range	5% - 100%
Protections	Short Circuit, Overload, Over Temperature.
Warranty	5 Years Replacement*

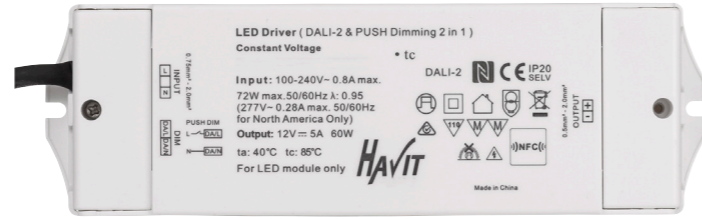

Product Ordering

Part Number	Output Voltage	Barcode
HCP-522331	24v DC Constant Voltage	9350418081865

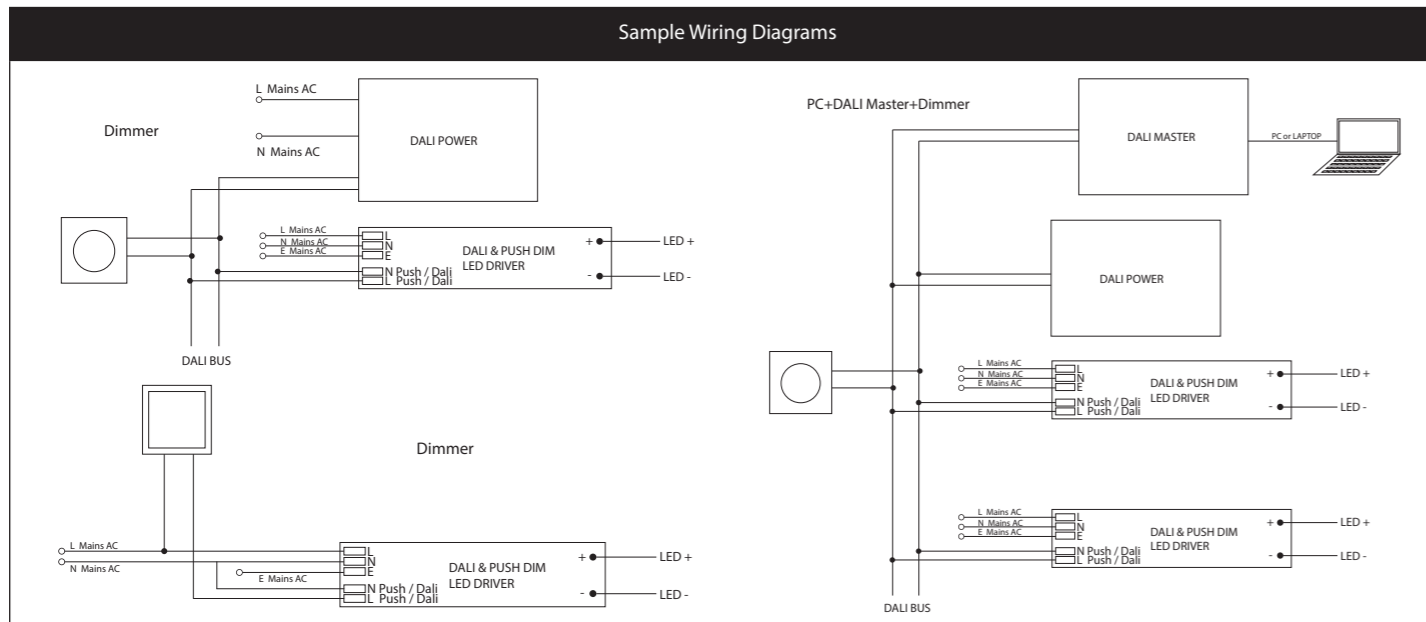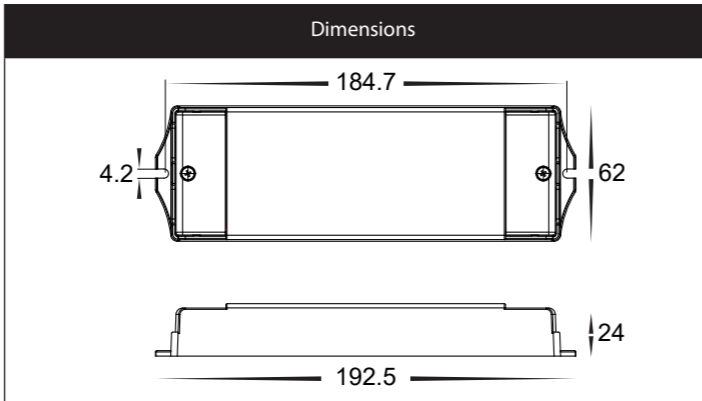

Part Number		HCP-522331	
Output	DC Voltage	24v DC (24-26V Adjust by NFC)	
	Voltage Tolerance	± 0.2V	
	Rated Current	2.5A	
	Rated Power	60W	
Input	Load Regulation	± 1%	
	Standby Power Consumption	≤ 0.5W	
	Voltage Range	100 277V AC	
	Frequency Range	47 - 63Hz	
	Power Factor (TYP.) @ Full Load	PF≥0.98 @ 120V AC PF≥0.95 @ 230V AC PF≥ 0.90 @ 277V AC (Full Loading)	
	THD(Typ.) @ Full Load	≤15% @ 120V AC ≤ 15% @ 230V AC ≤15% @ 277V AC	
	Efficiency(Typ.)@ Full Load	86% @ 120V AC 88% @ 230V AC 88% @ 277V AC	
	AC Current (Max)	0.8A	
	Inrush Current (TYP)	20A, 220us@50% Ipeak (120V AC)	
		45A, 175us@50% Ipeak (230V AC)	
		180A, 302us@50% Ipeak (277V AC)	
	Leakage Current	.05mA	
	Protections	Short Circuit	Hiccup mode, Recover automatically after fault condition is removed
		Overload	≤120%, Hiccup mode, Recover automatically after fault condition is removed
Over Temperature		Ambient Temperature Over 55°C ± 10°C, Output will turn off and recovers automatically after temperature drops.	
Environment	Working Temp.	-40°-+60°C	
	Working Humidity	20-90%RH, Non Condensing	
	Storage TEMP. Humidity	-40 - +80°C, 10 - 95% RH	
	TEMP. Coefficient	≤0.03%/°c (0-50°c)	
Safety & EMC	Vibration	10-500hZ, 2g 10min./1 Cycle, Period for 60min, each along X,Y,Z axes	
	Safety Standards	EN61347-1	
	Isolation Resistance	I/P-O/P I/P-FG O/P-FG:100MΩ/500VDC/25°C/70%RH	
	EMC Emission	EN55015 EN61000-3-2 EN61000-3-3 (EU)≥50% Load & FCC Part 15 B (US)	
Others	EMC Immunity	EN61000-4-2,3,4,5,6,11 EN61547	
	Weight	0.35Kg	