


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.16V I:0.2930A P:63.151W PF:0.9789 Freq:49.99Hz Lamp Flux:5233.71x1 lm					
NAME: HCP-672850		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.: Havit Commercial		SUR.:		Shielding Angle:	

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 82.88 lm/W
MODEL		Imax(cd)	1926	S/MH(C0/180)	1.25	
NOMINAL POWER(W)	65	LOR(%)	100.0	S/MH(C90/270)	1.13	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	5233.7	η UP,DN(C0-180)	0.7,55.5	
NOMINAL FLUX(lm)	5233.71	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.6,43.2	
LAMPS INSIDE	1	η up(%)	1.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	220.0	η down(%)	98.7	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

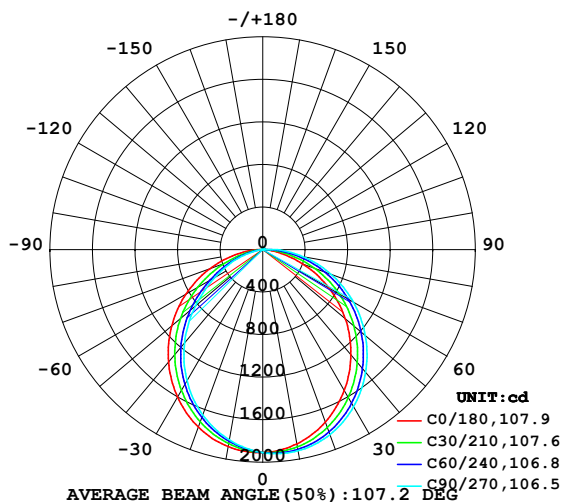

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

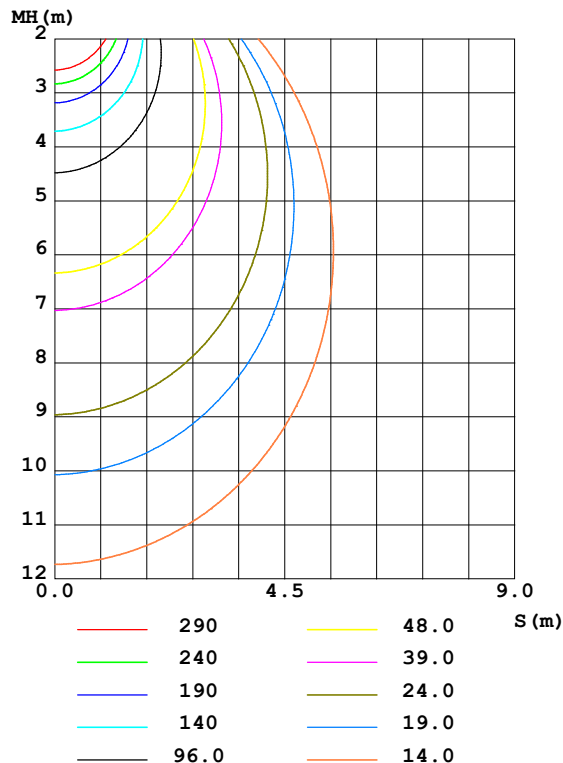

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-08-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:65.0%
Test Distance:10.730m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1855	1895	1921	1914	1881	1842	1817	1823	0- 10	180.3	180.3	3.44,3.44
20	1725	1802	1851	1838	1775	1700	1653	1665	10- 20	512.9	693.2	13.2,13.2
30	1532	1639	1708	1690	1602	1497	1425	1448	20- 30	767.8	1461	27.9,27.9
40	1291	1421	1505	1485	1379	1244	1145	1183	30- 40	910.2	2371	45.3,45.3
50	1016	1164	1259	1237	1118	951.7	827.9	880.5	40- 50	924.2	3295	63,63
60	716.3	877.7	982.9	959.2	831.7	638.0	516.2	559.9	50- 60	813.2	4108	78.5,78.5
70	405.6	573.3	686.3	662.5	531.1	340.0	256.9	263.0	60- 70	603.9	4712	90,90
80	131.6	271.6	384.4	362.2	237.9	96.92	39.80	40.73	70- 80	341.9	5054	96.6,96.6
90	3.659	38.78	116.7	94.56	25.01	3.444	3.829	3.689	80- 90	112.0	5166	98.7,98.7
100	4.362	3.864	4.122	4.234	4.342	5.557	6.245	6.150	90-100	12.38	5179	98.9,98.9
110	6.642	5.419	4.843	5.027	6.694	8.059	9.217	8.943	100-110	6.134	5185	99.1,99.1
120	8.926	7.674	7.100	7.349	9.212	10.45	11.76	10.84	110-120	7.893	5193	99.2,99.2
130	11.12	9.929	9.496	9.679	11.52	12.29	12.76	12.49	120-130	9.134	5202	99.4,99.4
140	13.10	12.09	11.82	11.93	13.46	14.01	14.41	14.22	130-140	9.373	5211	99.6,99.6
150	14.91	14.01	13.86	14.00	15.14	15.60	15.87	15.75	140-150	8.777	5220	99.7,99.7
160	16.27	15.75	15.71	15.77	16.61	17.03	17.17	17.06	150-160	7.235	5227	99.9,99.9
170	17.23	16.95	16.82	17.00	17.37	17.78	17.84	17.89	160-170	4.790	5232	100,100
180	17.79	17.86	17.84	17.94	17.84	17.86	17.78	17.94	170-180	1.679	5234	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-08-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:65.0%
 Test Distance:10.730m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.16V I:0.2930A P:63.151W PF:0.9789 Freq:49.99Hz Lamp Flux:5233.71x1 lm		
NAME: HCP-672850	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Havit Commercial	SUR.:	Shielding Angle:

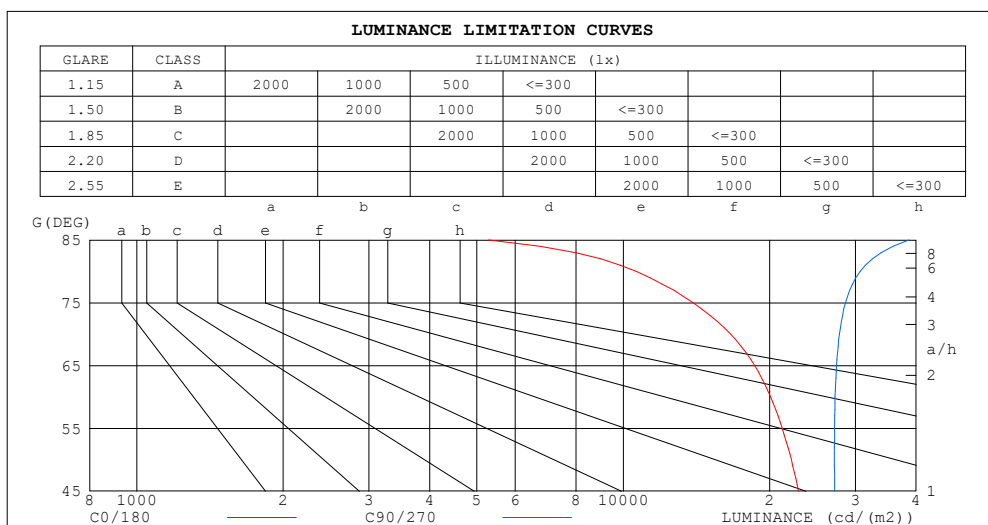

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5292	38633
80	10628	30704
75	13917	28630
70	16629	27832
65	18630	27445
60	20089	27263
55	21225	27189
50	22159	27174
45	22939	27200


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-08-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:65.0%
Test Distance:10.730m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.16V I:0.2930A P:63.151W PF:0.9789 Freq:49.99Hz Lamp Flux:5233.71x1 lm															
NAME: HCP-672850								TYPE:				WEIGHT:			
SPEC.:								DIM.:				SERIAL No.:			
MFR.: Havit Commercial								SUR.:				Shielding Angle:			

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

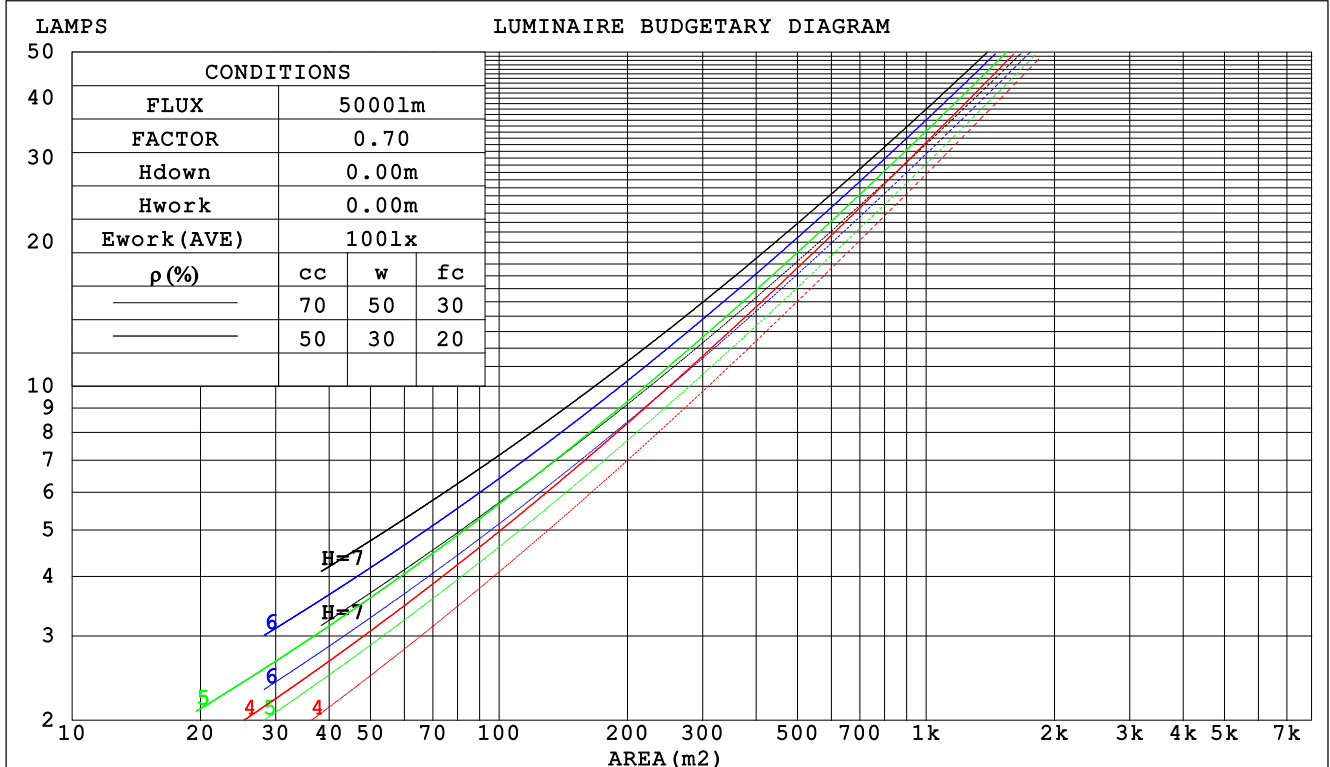

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-08-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:65.0%
 Test Distance:10.730m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.16V I:0.2930A P:63.151W PF:0.9789 Freq:49.99Hz Lamp Flux:5233.71x1 lm		
NAME: HCP-672850	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Havit Commercial	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.307	.175	.055	.300	.171	.054	.286	.164	.052	.273	.158	.051	.261	.151	.049		
2.0	.288	.158	.048	.282	.155	.048	.269	.150	.047	.258	.145	.045	.247	.140	.044		
3.0	.267	.142	.042	.261	.140	.042	.250	.135	.041	.240	.131	.040	.230	.128	.039		
4.0	.246	.128	.038	.241	.126	.037	.231	.123	.037	.222	.119	.036	.214	.116	.035		
5.0	.228	.116	.034	.223	.115	.033	.214	.112	.033	.206	.109	.032	.199	.106	.032		
6.0	.211	.106	.030	.207	.105	.030	.199	.102	.030	.192	.100	.029	.185	.098	.029		
7.0	.197	.097	.028	.193	.096	.027	.186	.094	.027	.180	.092	.027	.174	.090	.027		
8.0	.184	.090	.025	.181	.089	.025	.174	.087	.025	.169	.085	.025	.163	.084	.024		
9.0	.172	.083	.023	.169	.083	.023	.164	.081	.023	.159	.079	.023	.154	.078	.023		
10.0	.162	.078	.022	.160	.077	.021	.154	.076	.021	.150	.074	.021	.145	.073	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.200	.200	.200	.171	.171	.171	.117	.117	.117	.067	.067	.067	.021	.021	.021	
1.0	.190	.166	.144	.163	.143	.124	.111	.098	.086	.064	.057	.050	.021	.018	.016	
2.0	.182	.142	.108	.156	.122	.094	.107	.085	.065	.062	.049	.038	.020	.016	.012	
3.0	.174	.124	.085	.149	.107	.074	.102	.074	.052	.059	.043	.030	.019	.014	.010	
4.0	.166	.111	.069	.143	.096	.060	.098	.067	.042	.057	.039	.025	.018	.013	.008	
5.0	.159	.101	.058	.136	.087	.050	.094	.061	.035	.054	.036	.021	.018	.012	.007	
6.0	.152	.092	.050	.130	.080	.043	.090	.056	.031	.052	.033	.018	.017	.011	.006	
7.0	.145	.085	.044	.125	.074	.038	.086	.052	.027	.050	.031	.016	.016	.010	.005	
8.0	.138	.080	.039	.119	.069	.034	.082	.048	.024	.048	.029	.014	.016	.009	.005	
9.0	.132	.075	.036	.114	.065	.031	.079	.045	.022	.046	.027	.013	.015	.009	.004	
10.0	.127	.070	.033	.109	.061	.029	.076	.043	.020	.044	.025	.012	.014	.008	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-08-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:65.0%
Test Distance:10.730m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.16V I:0.2930A P:63.151W PF:0.9789 Freq:49.99Hz Lamp Flux:5233.71x1 lm										
NAME: HCP-672850					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: Havit Commercial					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.7	25.2	24.0	25.4	25.6	24.8	26.3	25.1	26.5	26.7
3H	25.0	26.4	25.3	26.6	26.9	26.6	28.0	26.9	28.2	28.5
4H	25.4	26.7	25.8	27.0	27.3	27.5	28.8	27.8	29.0	29.3
6H	25.7	26.9	26.0	27.2	27.5	28.2	29.5	28.6	29.8	30.1
8H	25.7	26.9	26.1	27.2	27.5	28.6	29.8	28.9	30.1	30.4
12H	25.7	26.8	26.1	27.2	27.5	28.9	30.0	29.3	30.4	30.7
4H 2H	24.5	25.8	24.8	26.1	26.4	25.3	26.6	25.6	26.9	27.2
3H	26.0	27.2	26.4	27.5	27.8	27.4	28.5	27.7	28.8	29.2
4H	26.6	27.6	27.0	28.0	28.3	28.4	29.4	28.8	29.8	30.1
6H	27.0	27.9	27.4	28.3	28.6	29.3	30.2	29.7	30.6	31.0
8H	27.0	27.9	27.5	28.3	28.7	29.7	30.6	30.1	31.0	31.4
12H	27.1	27.9	27.5	28.3	28.7	30.1	30.9	30.6	31.3	31.8
8H 4H	27.1	27.9	27.5	28.3	28.7	28.6	29.5	29.0	29.9	30.3
6H	27.6	28.3	28.1	28.7	29.2	29.7	30.4	30.2	30.9	31.3
8H	27.8	28.4	28.2	28.9	29.3	30.3	30.9	30.7	31.3	31.8
12H	27.8	28.4	28.3	28.9	29.4	30.8	31.4	31.3	31.8	32.3
12H 4H	27.1	27.9	27.6	28.3	28.8	28.6	29.4	29.0	29.8	30.2
6H	27.7	28.4	28.2	28.8	29.3	29.8	30.4	30.2	30.8	31.3
8H	28.0	28.5	28.5	29.0	29.5	30.4	30.9	30.9	31.4	31.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.2				
2.0H	+ 0.2 / - 0.5					+ 0.1 / - 0.2				

CIE Pub.117, 5234 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.8)
Area: 0.072 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-08-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:65.0%
Test Distance:10.730m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.16V I:0.2930A P:63.151W PF:0.9789 Freq:49.99Hz Lamp Flux:5233.71x1 lm		
NAME: HCP-672850	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Havit Commercial	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	46	39	33
0.80	68	56	49	67	56	49	65	55	48	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	65	79	71	64	57
1.50	88	78	71	86	77	71	83	76	70	62
2.00	95	86	80	93	85	79	89	83	78	70
2.50	99	91	85	97	90	84	93	87	82	73
3.00	102	95	90	100	94	89	96	90	86	77
4.00	106	100	96	104	98	94	99	95	91	82
5.00	108	104	99	106	101	98	101	98	95	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-08-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:65.0%
Test Distance:10.730m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.16V I:0.2930A P:63.151W PF:0.9789 Freq:49.99Hz Lamp Flux:5233.71x1 lm		
NAME: HCP-672850	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Havit Commercial	SUR.:	Shielding Angle:

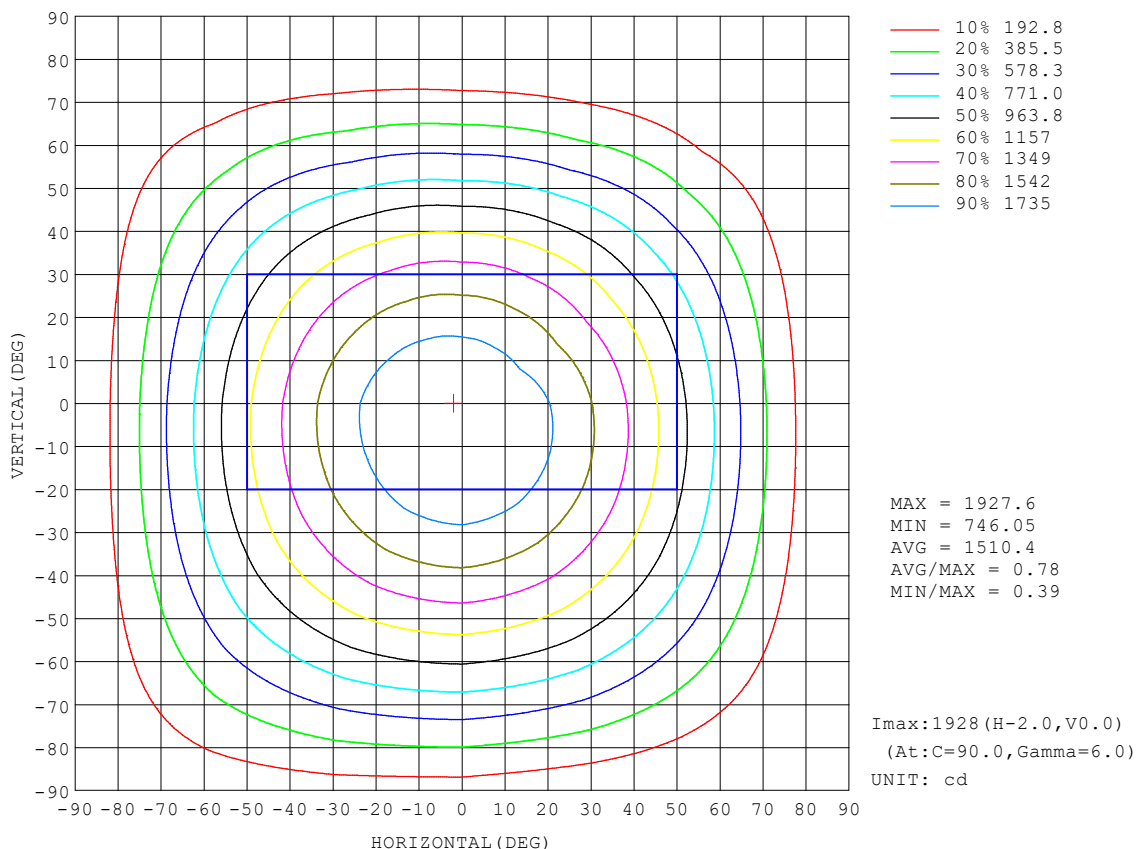


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-08-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:65.0%
 Test Distance:10.730m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.16V I:0.2930A P:63.151W PF:0.9789 Freq:49.99Hz Lamp Flux:5233.71x1 lm		
NAME: HCP-672850	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Havit Commercial	SUR.:	Shielding Angle:

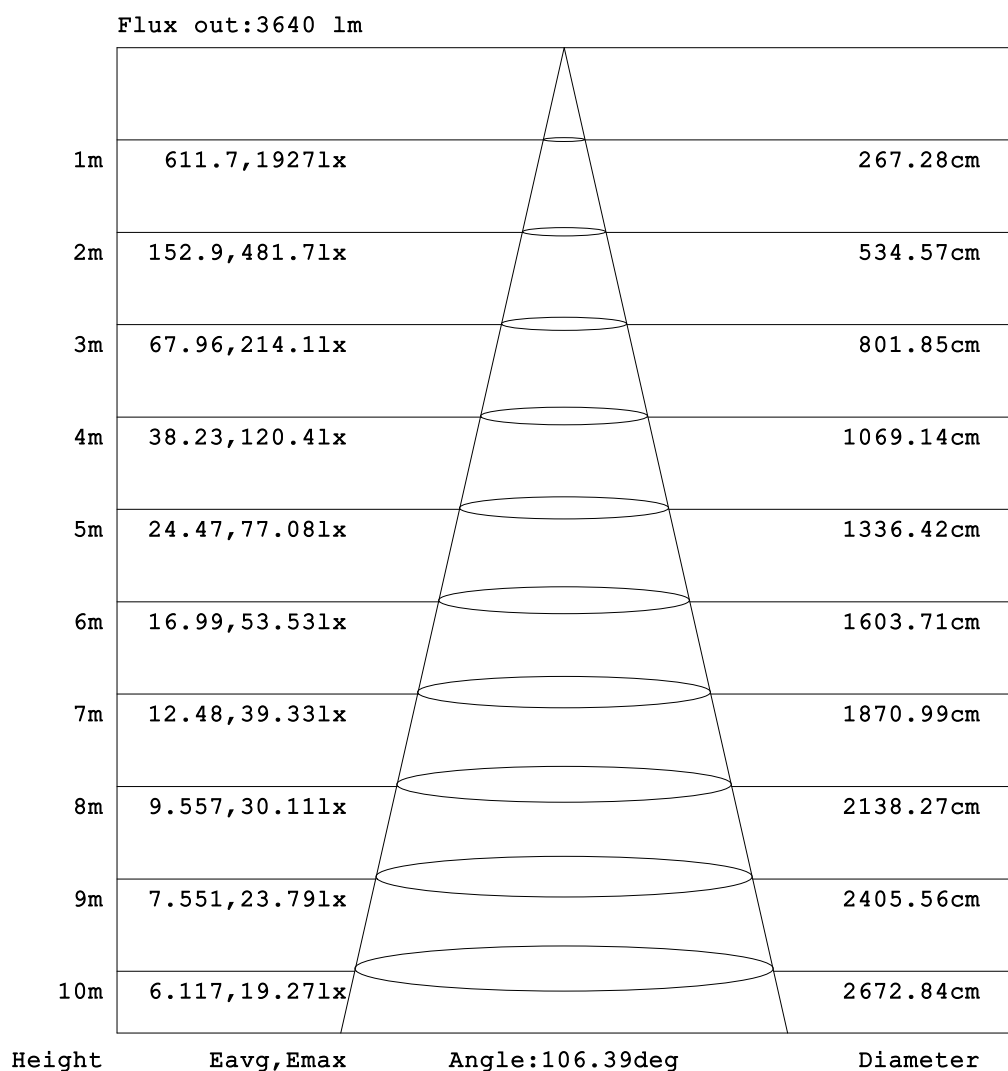


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-08-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:65.0%
 Test Distance:10.730m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.16V I:0.2930A P:63.151W PF:0.9789 Freq:49.99Hz Lamp Flux:5233.71x1 lm		
NAME: HCP-672850	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Havit Commercial	SUR.:	Shielding Angle:

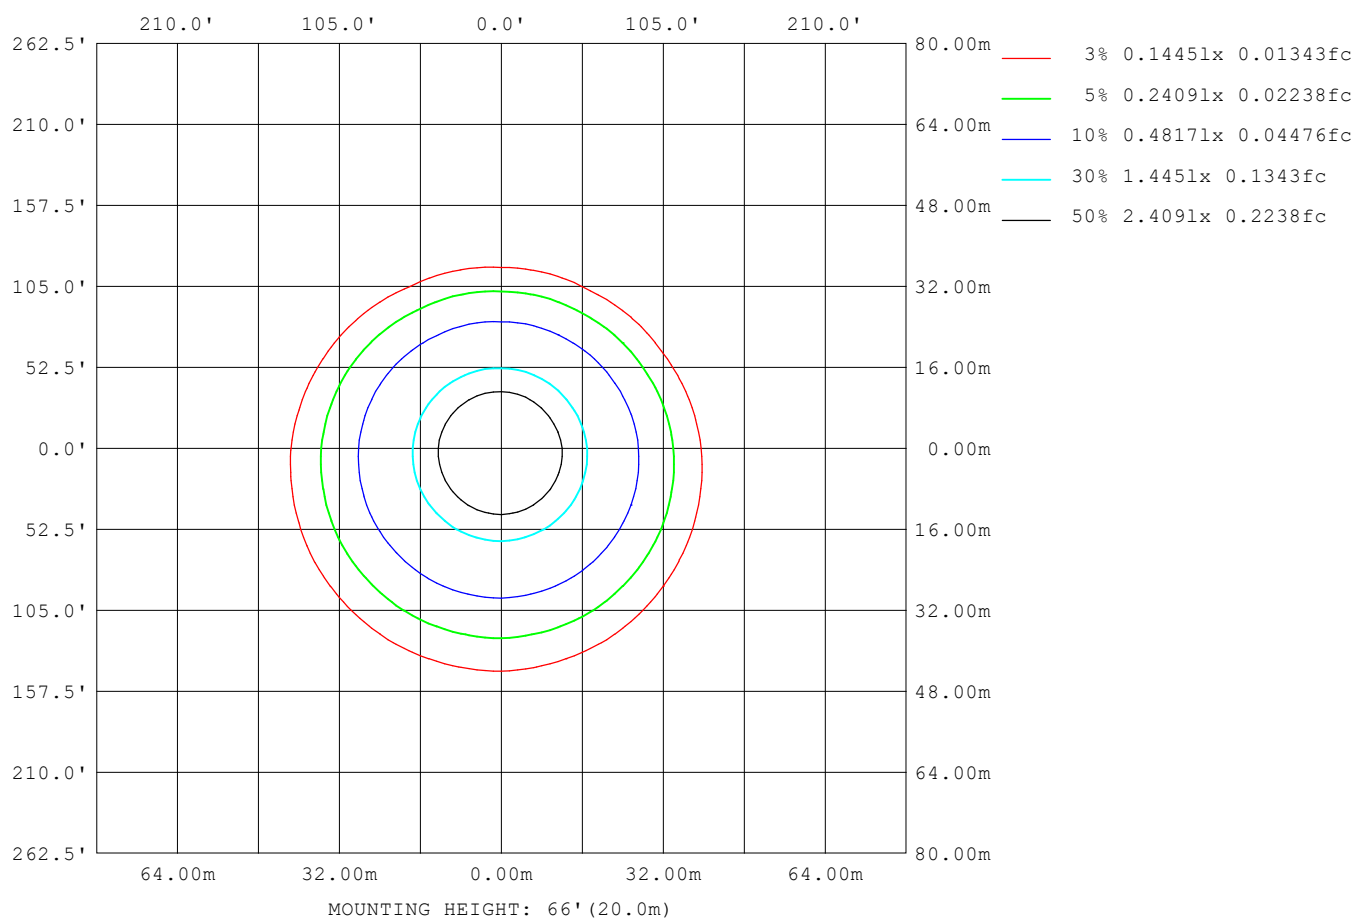

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-08-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:65.0%
 Test Distance:10.730m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.16V I:0.2930A P:63.151W PF:0.9789 Freq:49.99Hz Lamp Flux:5233.71x1 lm		
NAME: HCP-672850	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Havit Commercial	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	20436
L_0~180 (75) av	17090
L_0~180 (85) av	11898
L_90~270 (65) av	19995
L_90~270 (75) av	18082
L_90~270 (85) av	19578
L_45 (65) av	19922
L_45 (75) av	17052
L_45 (85) av	15169

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2019-08-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity:65.0%
 Test Distance:10.730m [K=1.0000]
 Remarks:

Planar Illuminance Curve

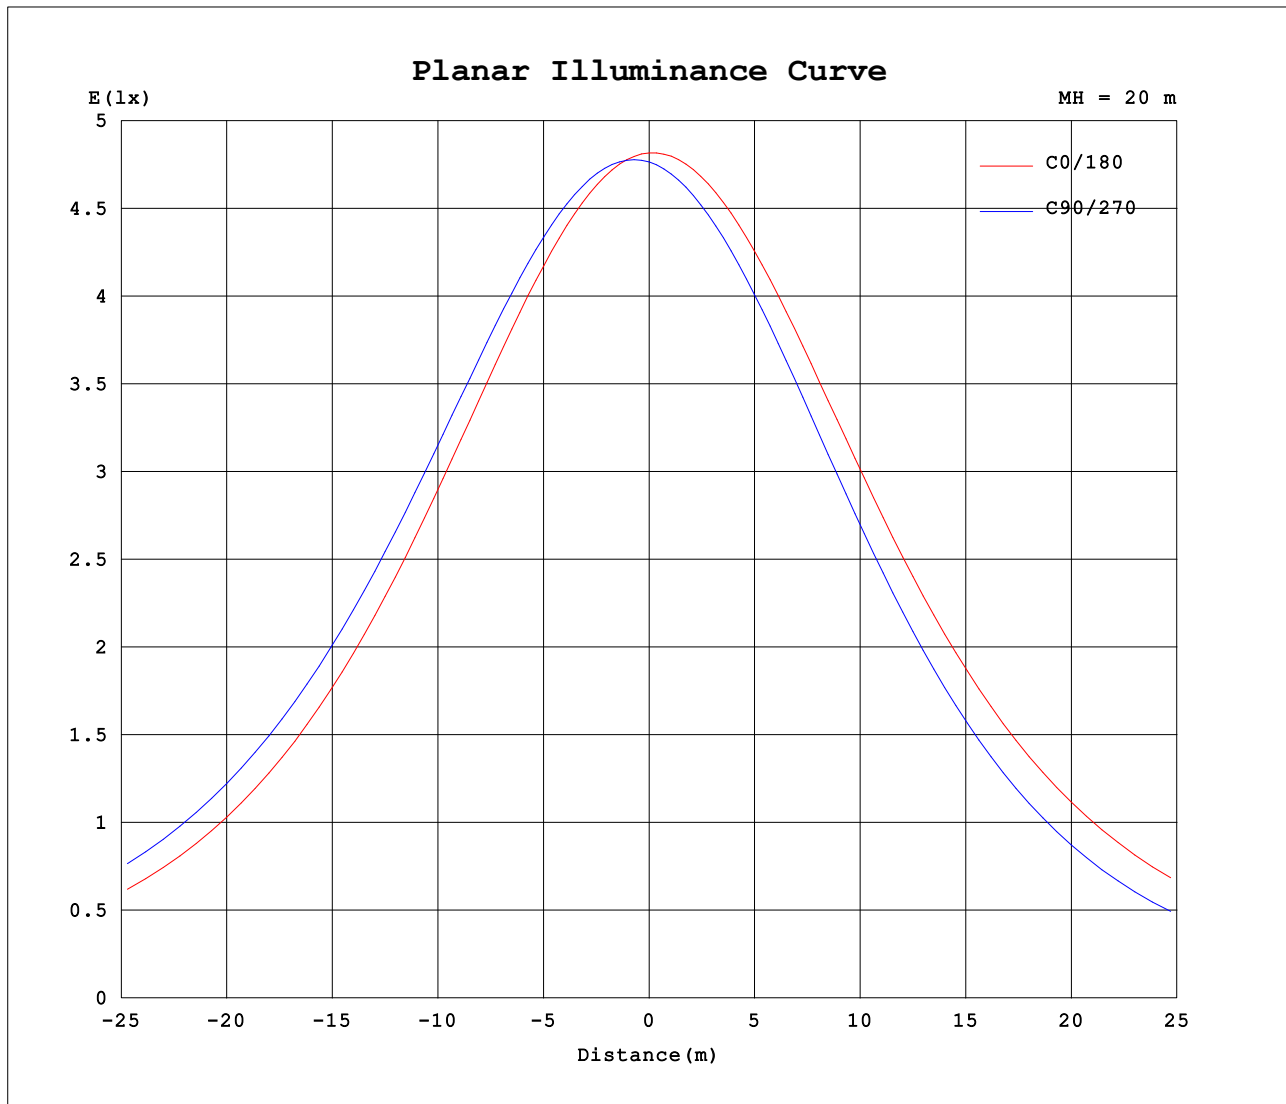

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2019-08-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
 Humidity: 65.0%
 Test Distance: 10.730m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.16V I:0.2930A P:63.151W PF:0.9789 Freq:49.99Hz Lamp Flux:5233.71x1 lm																	
NAME: HCP-672850									TYPE:			WEIGHT:					
SPEC.:									DIM.:			SERIAL No.:					
MFR.: Havit Commercial									SUR.:			Shielding Angle:					

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1909	1909	1909	1909	1909	1909	1909	1909	1909	1909	1909	1909						
5	1891	1906	1918	1925	1924	1919	1905	1891	1879	1873	1872	1878						
10	1855	1883	1907	1921	1920	1908	1881	1853	1830	1817	1817	1828						
15	1798	1841	1875	1896	1894	1877	1837	1797	1763	1743	1744	1760						
20	1725	1779	1824	1851	1849	1827	1775	1722	1679	1653	1654	1676						
25	1635	1701	1755	1788	1786	1759	1696	1632	1579	1547	1550	1576						
30	1532	1608	1670	1708	1706	1675	1602	1529	1465	1425	1431	1464						
35	1417	1501	1571	1613	1611	1576	1496	1414	1337	1291	1299	1341						
40	1291	1383	1460	1505	1503	1466	1379	1288	1199	1145	1157	1209						
45	1157	1255	1338	1387	1385	1345	1252	1153	1050	990	1004	1067						
50	1016	1120	1208	1259	1257	1216	1118	1011	893	828	844	917						
55	868	977	1071	1124	1122	1079	978	861	730	667	680	761						
60	716	829	927	983	982	937	832	705	571	516	521	599						
65	561	676	778	836	835	789	682	545	423	381	375	436						
70	406	522	625	686	685	640	531	386	294	257	248	278						
75	257	368	471	534	533	489	380	240	177	140	130	144						
80	132	223	320	384	384	340	238	126	67.8	39.8	30.1	51.4						
85	32.9	103	179	243	242	198	116	30.7	3.71	2.94	3.21	4.43						
90	3.66	13.7	64.0	117	111	78.0	25.0	3.33	3.56	3.83	3.83	3.55						
95	3.40	3.51	4.68	18.8	12.1	5.65	3.49	4.00	4.59	5.00	4.97	4.61						
100	4.36	3.68	4.04	4.12	4.51	3.95	4.34	5.12	6.00	6.24	6.33	5.97						
105	5.50	4.64	4.23	4.03	4.25	4.12	5.45	6.49	7.29	7.71	7.70	7.53						
110	6.64	5.75	5.09	4.84	4.86	5.19	6.69	7.61	8.51	9.22	9.01	8.87						
115	7.78	6.87	6.18	5.91	5.94	6.38	7.96	8.75	9.85	10.4	10.2	9.44						
120	8.93	8.03	7.32	7.10	7.12	7.58	9.21	9.90	11.0	11.8	11.2	10.4						
125	10.1	9.14	8.49	8.30	8.32	8.72	10.4	10.9	12.0	12.9	12.0	11.4						
130	11.1	10.2	9.61	9.50	9.49	9.87	11.5	12.0	12.6	12.8	12.6	12.3						
135	12.1	11.4	10.7	10.6	10.6	11.0	12.5	13.0	13.3	13.7	13.6	13.2						
140	13.1	12.3	11.8	11.8	11.8	12.1	13.5	13.8	14.2	14.4	14.3	14.1						
145	14.0	13.3	12.8	12.9	12.8	13.1	14.3	14.7	14.9	15.2	15.1	14.9						
150	14.9	14.2	13.8	13.9	13.9	14.1	15.1	15.5	15.7	15.9	15.8	15.7						
155	15.6	15.0	14.8	14.9	14.8	15.1	15.9	16.3	16.4	16.6	16.5	16.4						
160	16.3	15.8	15.7	15.7	15.7	15.9	16.6	17.0	17.1	17.2	17.2	17.0						
165	16.8	16.4	16.4	16.4	16.3	16.6	17.1	17.5	17.6	17.7	17.7	17.4						
170	17.2	17.0	16.9	16.8	16.9	17.1	17.4	17.7	17.8	17.8	18.0	17.8						
175	17.6	17.5	17.4	17.3	17.5	17.6	17.7	17.9	18.0	17.9	18.1	17.9						
180	17.8	17.9	17.8	17.8	17.9	18.0	17.8	17.9	17.9	17.8	18.0	17.9						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2019-08-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.407.13
Humidity:65.0%
Test Distance:10.730m [K=1.0000]
Remarks: