

DALI LED Dimming Driver

0~240...480W 0~20A 12~24Vdc

- Dimming interface: DALI, Push Dim.
- PWM digital dimming, standard DALI logarithmic dimming curve.
- Dimming range: 0~100%, LED start at 0.1% possible.
- 4CH isolated control output, Max. current output: 20A.
- Full protective plastic housing.
- DALI bus standard: IEC62386.
- Suitable for indoor environments.





Main Characteristics


Dimming Interface: DALI, Push Dim
 Input Voltage: 12~24Vdc
 Output Voltage: 12~24Vdc
 Output: 5A×4CH Max. 20A
 Max. Output Power: (0~60W...120W)×4CH Max. 480W

Dimming Range: 0~100%
 Working Temperature: -30°C~55°C
 Product Size: L175×W44×H30(mm)
 Package Size: L178×W48×H33(mm)
 Weight(G.W.): 135g


Dimensions

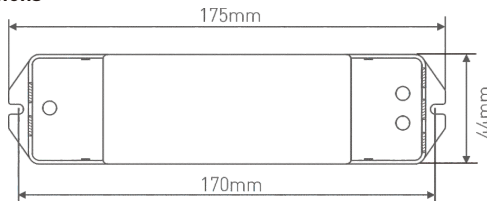


System Connection Diagram:

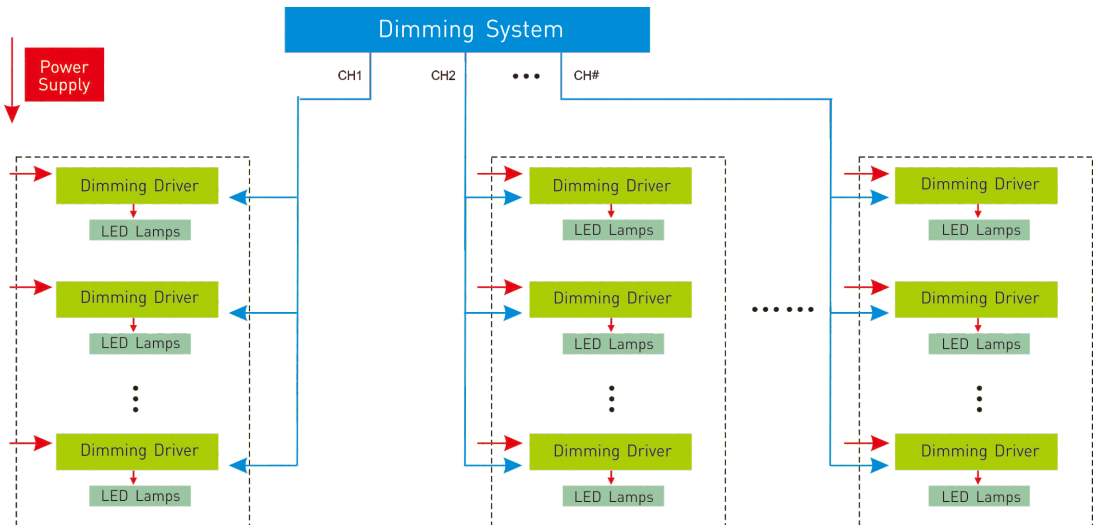

Connections



DALI bus no need distinguish plus-minus polarity.

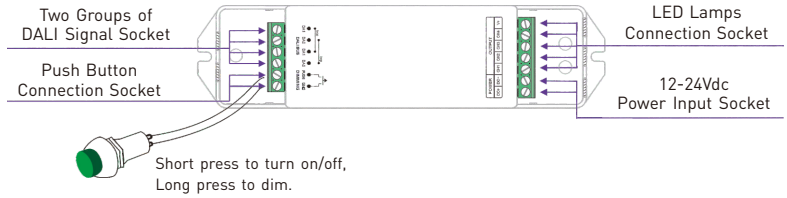

12V lamp connected, loads 0~240W(12V); 24V lamp connected, loads 0~480W(24V).

