

# Specialty Materials™



THE BEST GARMENT DECORATION PRODUCTS

## ThermoFlex® **TURBO** Brights

- Turbo adhesive allows a low temperature and quick press time, which eliminates press marks
- Durable, weeds easily, and has a soft hand and strong grip
- Does not encourage dye-migration since it has a low heat and quick press time
- Pressure-sensitive carrier enables easy weeding and repositioning

### Acceptable Fabrics

Cotton, Uncoated Polyester, Fabric Blends, Spandex, Lycra, Wool, Linen, and Nylon (See Pressing Instructions below for Nylon)

### Sizing Available


Available Widths (in.): 15" and 20"

Available Lengths (ft.): 15', 30', 45', 60', 90', and 150' rolls

### Thickness



4 mils/100 microns

### Application Instructions for Cotton, Polyester, & Cotton/Polyester Blends




Machine wash using mild detergent. Do not use bleach. Dry at a normal dryer setting on household machines. Do not iron directly onto this material. Wash temperature should not exceed 140°F.

### Application Instructions for Nylon



Machine wash using mild detergent. Do not use bleach. Dry at a normal dryer setting on household machines. Do not iron directly onto this material. Wash temperature should not exceed 140°F.

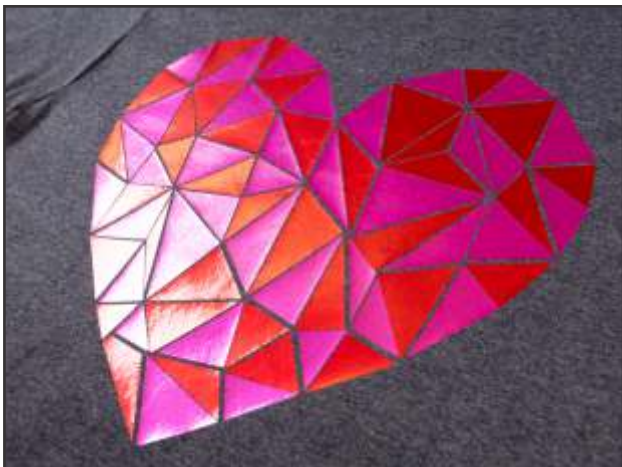

**CPSIA**  
COMPLIANT



Gold  
TFT-14921



Rose Gold  
TFT-14922



Copper  
TFT-14924



Silver  
TFT-14931



Green  
TFTB-14646



Dark Copper  
TFTB-14647



Royal Blue  
TFTB-14648



Pink  
TFTB-14925



Red  
TFTB-14926



Blue  
TFTB-14927



Lavender  
TFTB-14928

Technical Support: Toll Free: 877-437-8556 | SpecialtyMaterials.com

Test on dazzle cloth and other moisture-wicking polyesters. Moisture-wicking materials have better adhesion when washed and dried using no fabric softener or blotted with rubbing alcohol before pressing. Be advised that dye migration has occurred with low energy dyes in polyester and poly-blend fabrics.

Copyright © 2019, Specialty Materials & Digital Decoration, LLC. All rights reserved. Tulsa, OK 74107 | 877-437-8556