



Programming Instructions SL-787-18

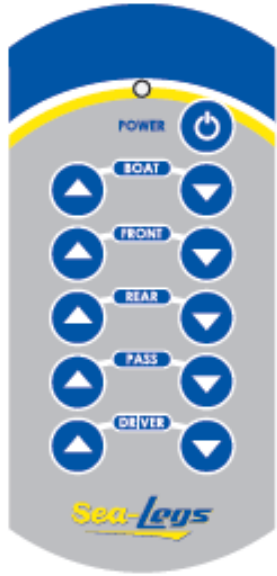

Programming Dipswitches

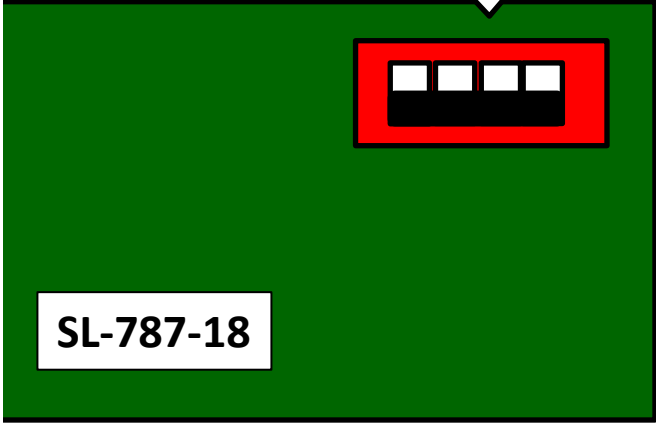


Programming New Remote

1. Remove front cover.
2. Locate program dipswitches on upper right corner of circuit board.
3. Raise No. 1 dipswitch into upper position.
4. Press and hold any button on the remote control for approximately 3 seconds.
5. Return No. 1 dipswitch to lower position. Remote is now programmed


***Note:** Up to 8 remotes may be programmed to a single receiver board.

****Note:** To completely clear receiver memory of all remote controls raise all 4 dipswitches to upper position for 10 seconds and then return to operational mode. Follow above instructions to reprogram new remote controls.

Programming Mode

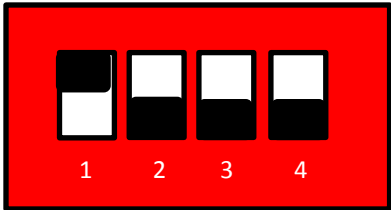

Operational Mode

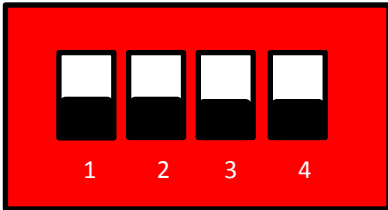

Memory Clear Mode

