

PRODUCT DATASHEET

P MR11 35 36° 4 W/4000K GU4

PARATHOM MR11 12 V | Low-voltage LED reflector lamps MR11 with retrofit pin base



AREAS OF APPLICATION

- Display cabinets and shop windows
- Museums, art galleries
- Exhibition rooms
- Residential interiors
- As a downlight for marking walkways, doors, stairs, etc.
- Outdoor applications only in suitable luminaires

PRODUCT BENEFITS

- Long lifetime of up to 15,000 h
- Low energy consumption
- Easy relamping thanks to compact design and GU4 base

PRODUCT FEATURES

- Professional LED alternative to halogen MR11 lamps
- Mercury-free lamps



TECHNICAL DATA

Electrical data

| | |
|--|------------|
| Rated wattage | 4.00 W |
| Nominal wattage | 4.00 W |
| Nominal voltage | 12 V |
| Claimed equiv. conventional lamp power | 35 W |
| Max. lamp no. on circuit break. 10 A (B) | 27 |
| Max. lamp no. on circuit break. 16 A (B) | 44 |
| Operating frequency | 50...60 Hz |
| Power factor λ | > 0.50 |


Photometrical data

| | |
|---|--------------|
| Nominal luminous flux | 345 lm |
| Rated luminous flux | 345 lm |
| Rated color temperature | 4000 K |
| Lumen main.fact.at end of nom.life time | 0.70 |
| Light color (designation) | Cool White |
| Color temperature | 4000 K |
| Luminous flux | 345 lm |
| Color rendering index Ra | ≥ 80 |
| Standard deviation of color matching | ≤ 6 sdc |
| Color rendering index Ra | ≥ 80 |
| Nominal useful luminous flux 90° | 345 lm |
| Rated useful luminous flux 90° | 345 lm |
| Rated peak intensity | 600 cd |

Light technical data

| | |
|------------------------------------|----------|
| Beam angle | 36 ° |
| Warm-up time (60 %) | < 0.50 s |
| Starting time | < 0.5 s |
| Nominal beam angle | 36 ° |
| Rated beam angle (half peak value) | 36.00 ° |

Dimensions & weight

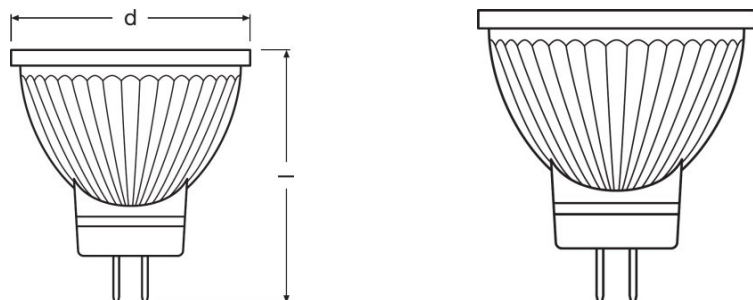

| | |
|-------------------------|---------|
| Overall length | 38.0 mm |
| Diameter | 35.0 mm |
| Outer bulb | MR35 |
| Length | 38.0 mm |
| Maximum diameter | 35.0 mm |

Temperatures & operating conditions

| | |
|---|-------|
| Maximum temperature at tc test point | 85 °C |
|---|-------|

Lifespan

| | |
|-----------------------------------|---------|
| Nominal lamp life time | 15000 h |
| Rated lamp life time | 15000 h |
| Number of switching cycles | 100000 |

Additional product data

| | |
|------------------------------------|--|
| Base (standard designation) | GU4 |
| Mercury content | 0.0 mg |
| Mercury-free | Yes |
| Show WEEE picto | Yes |
| Product remark | All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value |

Capabilities

| | |
|-----------------|----|
| Dimmable | No |
|-----------------|----|

Certificates & standards



| | |
|--------------------------------|----|
| Energy efficiency class | A+ |
|--------------------------------|----|

| | |
|---------------------------|-------------|
| Energy consumption | 5 kWh/1000h |
|---------------------------|-------------|

Country-specific categorizations

| | |
|------------------------|-----------------|
| Order reference | LEDPMR113536 4W |
|------------------------|-----------------|

Light Distribution

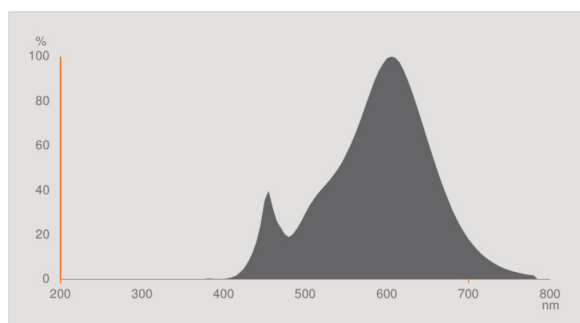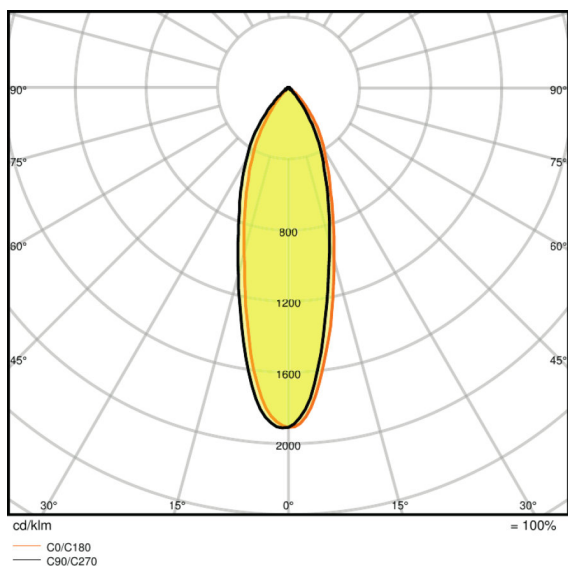

LDC typ polar

Spectral power distribution

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|----------------------|
| 4058075105256 | Folding carton box 1 | 36 mm x 36 mm x 46 mm | 22.00 g | 0.06 dm ³ |
| 4058075105263 | Shipping carton box 10 | 188 mm x 78 mm x 55 mm | 368.00 g | 0.81 dm ³ |
| 4058075140127 | Shipping carton box 80 | 201 mm x 169 mm x 240 mm | 3127.00 g | 8.15 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For further products and actual information concerning LED lamps see
 ▶ www.ledvance.com/ledlamps

For Guarantee see

▶ www.ledvance.com/guarantee

Further information see

▶ www.ledvance.com/low-voltage-ledlamps

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.