

## SPECIFICATION SHEET




JOB NAME:

LOCATION:

QUOTE/REF#:

### SPECIFICATIONS

<b>Voltage:</b>	12V DC
<b>Wattage:</b>	3w per ft. 9.84 watt/meter
<b>Brightness:</b>	400 Lumen per ft. 1312 Lumens/meter
<b>CRI:</b>	90+
<b>LED Colors:</b>	60K, 30K, Red, Green, Blue, Purple, Yellow
<b>Dimmable:</b>	Yes, with compatible dimmer
<b>Dimension:</b>	12 in. L x 0.23 in. W x 0.47 in H
<b>Cuttable:</b>	Every 1 in (25.4 mm) at the cut mark
<b>Lifespan:</b>	± 30,000 - 50,000 hours
<b>Environment:</b>	Wet Location IP65
<b>Power Supply:</b>	12V DC dimmable or non-dimmable drivers are required, sold separately
<b>Mounting:</b>	Mounting Clips available (sold separately)

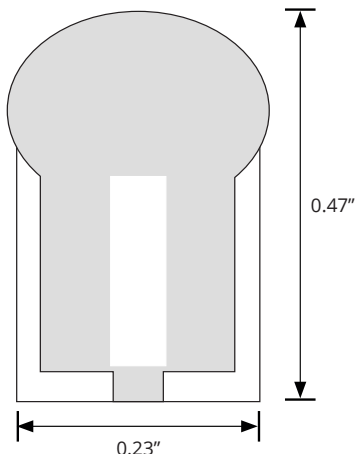

### DESCRIPTION

The flexibility and versatility of the 12V LED Mini Flex Neon will allow it to easily be mounted around edges and bend around corners with a solid lighting effect. Available with a wide variety of CCTs and color options and it is waterproof when installed with our end caps.

The 12V DC Mini Flex Neon can also be mounted into an aluminum profile channel or silicone into place. Mounting on the side of a display or cabinet can be done with regular 3M Double-faced Tape or Carpet Tape making this a simple onsite installation.

### KEY FEATURES

- Available in **6000K, 3000K, Red, Green, Blue, Purple, or Yellow** LED Color options
- Flexible, Durable, & Easy to Install
- Maintenance-free
- Solid-State Construction
- High shock and Vibration Resistance
- SMD 3528 LEDs Chipsets are high intensity, ultra-bright, and energy-efficient
- No RF interference
- Up to 50,000 hours Lifespan
- Dimmable with compatible dimmer and power supply
- Rated IP65 for Wet Locations
- UL Listed, RoHS Compliant

### APPLICATIONS

- Custom Signage
- Tradeshows Exhibits, Retail Displays
- Accent and decorative lighting
- Architectural lighting for corridors, canopies, archways, or windows
- Downlighting or Uplighting Applications
- Backlighting or edge-lighting
- Under-cabinet, Under-Counter, or cove lighting
- Custom DIY projects

