

SPECIFICATION SHEET

JOB NAME: _____

LOCATION: _____

QUOTE/REF#: _____



SPECIFICATIONS

Brightness:	2200 Lumens
Power:	20 watt
Input Voltage:	120V AC
LED CCT:	4000K/5700K CCT Selectable
CRI:	90+
LED Chip Size:	3528
# of LED Chips:	24
Dimmable:	No
IP Rating:	IP20
Environment:	Indoor Use - Dry Location
Beam Angle:	Adjustable 90-180°
Head:	Adjustable & Rotates 365°
Length:	17.16 in / 435 mm long
Width:	4.13 in / 105 mm wide
Height:	1.18 in / 30 mm thick
Included:	1x LED CCT Arm Light 1x 10 ft Plug-N-Play Power Cord 1x 2.5 ft Plug-N-Play Power Cord
Mounting:	Various Mounting Options Sold Separately
Manufacturer:	Elumalight
Rating:	ETL Listed
Avg. Lifetime:	± 30,000 - 50,000 hours

*** Required:** Requires mounting accessories.
The additional linking power cord is available, sold separately.

DESCRIPTION

Introducing our new LED CCT Linkable Display Arm Light. It is our new series of linkable LED Display arm light for trade show booth and exhibits display lighting applications. They are engineered to deliver even illumination without any hot spots.

This product features 3 adjustable LED heads can rotate up to 360 degrees, it allows you to adjust to the desired light beam angle. Link up to 11 LED CCT Display Arm Lights together with the supplied linking cord. Easily turn on and off or change from Cool White to Warm White color temperature by pushing the built-in switch.

This LED CCT Display Arm Light emits no heat and is accepted at all trade show venues. Having a lightweight construction, versatile mounting options, and pre-wired with an internal LED driver, it is ready to mount to your display unit.

Using just 20 watts of power, but emitting 2200 lumens of light, this fixture is the optimal choice for your display and exhibit lighting solutions. Available in grey finish.

KEY FEATURES


- Linkable up to 11 LED CCT Display Arm Lights with supplied linking cord.
- Easy to switch from Cool White to Warm White color temperature.
- The 3 adjustable LED Heads can rotate up to 365 degrees allowing for uplighting or downlighting applications.
- Built-In Frosted diffuser Lens to protect the LEDs and evenly illuminate.
- Energy-efficient LED CCT Chipsets draws up to 20 watts of power.
- Versatile mounting options are available, see related products.
- Each light comes with a 10 ft Plug N Play power cord and a linking power cord.
- No RF interference
- Up to 50,000 hours lifespan
- CE, ETL Listed

APPLICATIONS


- Tradeshow Booth
- Exhibit and Displays
- Pop-up Displays
- Wall Wash Applications
- Illuminate Graphics and Artworks




SOLD SEPARATELY

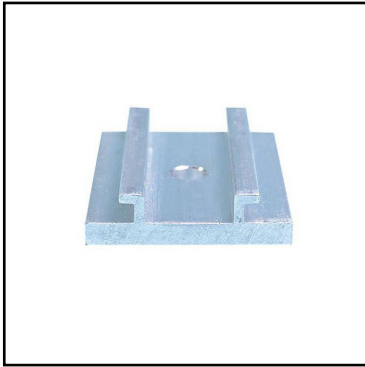


SKU: EL-CLP-20
FLAT BAR MOUNT CLIP

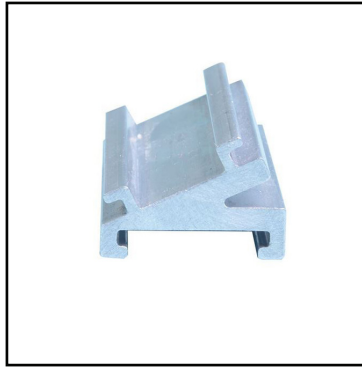


SKU: EL-CLP-21
ANGLE MOUNTING CLIP

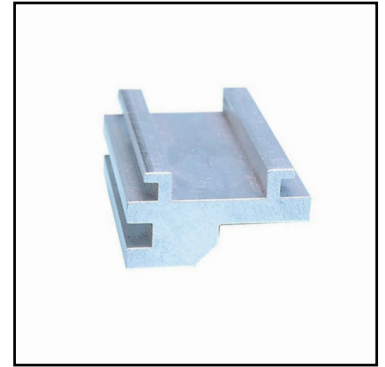

SKU: EL-CLP-22
AGAM MOUNTING CLIP

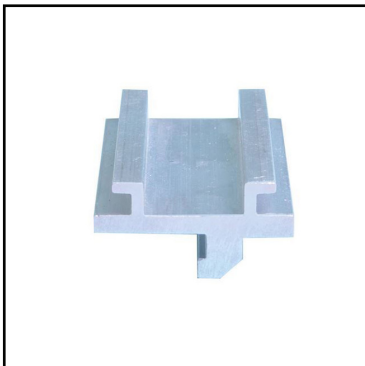


SKU: EL-CLP-23
OCTANORM MOUNTING CLIP

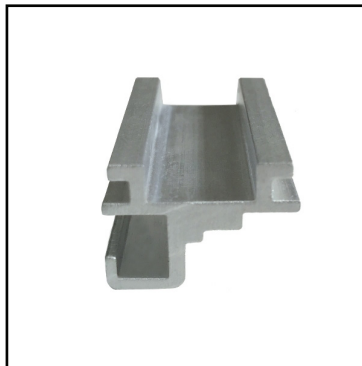

SKU: EL-CLP-61
UNIVERSAL MOUNTING CLIP



SKU: EL-CLP-19
BEMATRIX MOUNTING CLIP

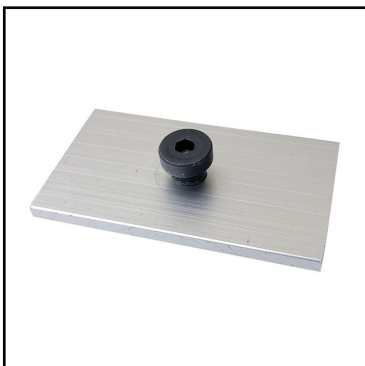

SKU: EL-CLP-24
SKYLINE MOUNTING CLIP



SKU: EL-CLP-60
POP-UP ADAPTER
MOUNTING CLIP



SKU: EL-CLP-25
POP-UP X
MOUNTING CLIP

SOLD SEPARATELY



SKU: EL-51CL
2.5 in. CLAMP



SKU: EL-56CL
1.5 in. CLAMP



SKU: EL-53CL
7 in. CLAMP